
# Service Manual

**Digital Progressive Wide Plasma Television** 



TH-42PA50E TH-42PE50B TH-37PA50E TH-37PE50B

**GP8DE Chassis** 

### **Specifications**

**Power Source** AC 220-240 V, 50 / 60 Hz

Power Consumption Average use: 245 W (TH-37PA50E)

Average use: 315 W (TH-42PA50E)
Average use: 253 W (TH-37PE50B)
Average use: 323 W (TH-42PE50B)

Standby condition: 0.3 W (TH-37/42PA50E)

Standby condition: 0.3 W (Without DVB Timer programmes) (TH-37/42PE50B) Standby condition: 16 W (With DVB Timer programmes) (TH-37/42PE50B)

Plasma Display panel

Drive method AC type
Aspect Ratio 16:9
Contrast Ratio 4000:1

Screen size (No.of pixels) 818 mm (W)  $\times$  461 mm (H)  $\times$  939 mm (diagonal) (37-inch)

920 mm (W)  $\times$  518 mm (H)  $\times$  1,056 mm (diagonal) (42-inch)

 $408,960 (852 (W) \times 480 (H)) [2,556 \times 480 dots]$ 

Sound

 $\begin{array}{lll} \textbf{Speaker} & 12~\text{cm} \times 6~\text{cm} \times 2~\text{pcs}, ~6~\Omega \\ \\ \textbf{Audio Output} & 16~\text{W} ~(8~\text{W} + 8~\text{W}~), ~10\%~\text{THD} \\ \end{array}$ 

Applicable signals

Colour System NTSC, PAL, PAL60, SECAM, Modifi ed NTSC

**Scanning format** 480i(60Hz), 480p(60Hz), 576i(50Hz), 576p(50Hz), 720p(50Hz), 720p(60Hz), 1080i(50Hz), 1080i(60Hz)

Receiving Systems PAL B, G, H, SECAM B, G SECAM L / L'

/ Band name (PA50E)

PAL D, K, SECAM D, K

# **Panasonic**®

© 2005 Matsushita Electric Industrial Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

PAL 525/60

Playback of NTSC tape from some PAL Video re cord ers (VCR)

M.NTSC

PAI I

Playback from M. NTSC Video recorders (VCR)

NTSC (AV input only)

Playback from NTSC Video recorders (VCR)

Receiving Systems / Band name (PE50B)

UHF E21-68. PAL 525/60

Playback of NTSC tape from some PAL Video recorders (VCR) or NTSC disc playback from DVD

player and recorder.

DVB

Digital terrestrial services via UHF aerial input.

M.NTSC

Playback from M.NTSC Video recorders (VCR).

NTSC (AV input only)

Playback from NTSC Video recorders (VCR).

Aerial - Rear UHF / VHF (PA50E)

UHF (PE50B)

Operating Conditions Temperature : 0 °C - 40 °C

Humidity: 20 % - 80 % RH (non-condensing)

**Connection Terminals** 

AV1 (Scart connecter) 21 Pin terminal (Audio/Video in, Audio/Video out, RGB in)

AV2 (Scart connecter) 21 Pin terminal (Audio/Video in, Audio/Video out, S-Video in, Q-Link)

AV3 (Scart connecter) 21 Pin terminal (Audio/Video in, Audio/Video out, RGB in, S-Video in, Q-Link)

COMPONENT

VIDEO Y 1.0 Vp-p (including synchronization)

PB, PR ±0.35 Vp-p

AUDIO L - R RCA PIN Type × 2 0.5 Vrms

Output

AUDIO L - R RCA PIN Type × 2 0.5 Vrms (high impedance)

**Dimensions (W \times H \times D)** 968 mm  $\times$  641 mm  $\times$  96.5 mm (37-inch)

1,068 mm × 701 mm × 96.5 mm (42-inch)

Weight 28.5 kg Net (37-inch)

33 kg Net (42-inch)

### Notes:

· Design and Specifi cations are subject to change without notice. Weight and Dimensions shown are approximate.

· This equipment complies with the EMC standards listed below.

EN55013, EN61000-3-2, EN61000-3-3, EN55020

### **⚠ WARNING**

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

### **CONTENTS**

Page	Page
1 Applicable signals5	2.1. General Guidelines 6
2 Safety Precautions6	2.2. Touch-Current Check 6

3 Prevention of Electro Static Discharge (ESD) to	13.1. P-Board	
Electrostatically Sensitive (ES) Devices7	13.2. PA-Board ·····	
4 About lead free solder (PbF)8	13.3. PB-Board ·····	41
5 Service Hint9	13.4. H-Board	42
6 Plasma panel replacement method 10	13.5. DG-Board	44
6.1. Remove the Back cover 10	13.6. TA-Board	46
6.2. Remove the P-Board 10	13.7. XV-Board (PE50B)	47
6.3. Remove the PB-Board10	13.8. Z-Board	49
6.4. Remove the D-Board10	13.9. D-Board	50
6.5. Remove the rear terminal cover11	13.10. C1-Board (37 inch)	53
6.6. Remove the metal frame11	13.11. C1-Board (42 inch)	
6.7. Remove the XV-Board (PE50B only)11	13.12. C2-Board (37 inch)	
6.8. Remove the DG-Board11	13.13. C2-Board (42 inch)	
6.9. Remove the H-Board and TA-Board12	13.14. SC-Board	
6.10. Remove the PA-Board 12	13.15. SU-Board (37 inch)	
6.11. Remove the Z-Board12	13.16. SU-Board (42 inch)	
6.12. Remove the SU-Board 12	13.17. SD-Board (37 inch)	
6.13. Remove the SD-Board 13	13.18. SD-Board (42 inch)	
6.14. Remove the SC-Board 13	13.19. SS-Board	
6.15. Remove the SS-Board14	13.20. K and S-Board	
6.16. Remove the C1-Board14	14 Block and Schematic Diagram ·····	
6.17. Remove the C2-Board14	14.1. Schematic Diagram Notes ······	
6.18. Remove the K-Board14	14.2. Main Block Diagram	
6.19. Remove the S-Board15	14.3. P-Board Block Diagram	
6.20. Remove the Speaker L, R15	14.4. P-Board (1 of 6) Schematic Diagram ······	
6.21. Remove the Plasma panel section from the Front frame	14.5. P-Board (2 of 6) Schematic Diagram	
(glass)15	14.6. P-Board (3 of 6) Schematic Diagram	
6.22. Replace the plasma panel (finished)16	14.7. P-Board (4 of 6) Schematic Diagram	
7 Location of Lead Wiring17	14.8. P-Board (5 of 6) Schematic Diagram	
7.1. Lead of Wiring (1)	14.9. P-Board (6 of 6) Schematic Diagram	
7.1. Lead of Willing (1)	14.10. PA and PB-Board Block Diagram	
7.3. Lead of Wiring (3)19	14.11. PA-Board Schematic Diagram	
8 Self Check20	14.12. PB-Board Schematic Diagram	
8.1. Power LED Blinking timing chart21 8.2. No Power21	14.13. H and TA-Board Block Diagram	
8.3. No Picture	14.14. K, S and Z-Board Block Diagram	
	14.15. H Board (1 of 2) Schematic Diagram	
8.4. Local screen failure23	14.16. H-Board (2 of 2) Schematic Diagram	
9 Service Mode Function24	14.17. K, S and TA-Board Schematic Diagram ·····	
9.1. How to enter SERVICE 124	14.18. Z-Board Schematic Diagram ······	
9.2. How to enter SERVICE 224	14.19. XV-Board Block Diagram (PE50B)	
9.3. Option Description26	14.20. XV-Board (1 of 5) Schematic Diagram (PE50B)	
10 Adjustment Procedure28	14.21. XV-Board (2 of 5) Schematic Diagram (PE50B)	
10.1. Driver Set-up28	14.22. XV-Board (3 of 5) Schematic Diagram (PE50B)	
10.2. Initialization Pulse Adjust29	14.23. XV-Board (4 of 5) Schematic Diagram (PE50B)	
10.3. P.C.B. (Printed Circuit Board) exchange 30	14.24. XV-Board (5 of 5) Schematic Diagram (PE50B)	
10.4. Adjustment Volume Location 30	14.25. DG-Board (1 of 2) Block Diagram ·····	
10.5. Test Point Location	14.26. DG-Board (2 of 2) Block Diagram	
11 Adjustment	14.27. DG-Board (1 of 11) Schematic Diagram ·····	
11.1. PAL panel white balance adjustment 32	14.28. DG-Board (2 of 11) Schematic Diagram ······	
11.2. 1080i white balance adjustment 33	14.29. DG-Board (3 of 11) Schematic Diagram ······	
11.3. Sub bright adjustment 33	14.30. DG-Board (4 of 11) Schematic Diagram ·····	
11.4. ABL adjustment34	14.31. DG-Board (5 of 11) Schematic Diagram ·····	
12 Hotel mode35	14.32. DG-Board (6 of 11) Schematic Diagram ·····	
13 Conductor View 37	14.33. DG-Board (7 of 11) Schematic Diagram ·····	99

14.34.	DG-Board (8 of 11) Schematic Diagram 100	14.54. SC-Board Block Diagram	120
14.35.	DG-Board (9 of 11) Schematic Diagram ······ 101	14.55. SC-Board (1 of 2) Schematic Diagram	121
14.36.	DG-Board (10 of 11) Schematic Diagram ······ 102	14.56. SC-Board (2 of 2) Schematic Diagram	122
14.37.	DG-Board (11 of 11) Schematic Diagram ······ 103	14.57. SU-Board Block Diagram	· 123
14.38.	D-Board Block Diagram 104	14.58. SU-Board Schematic Diagram (37 inch)	124
14.39.	D-Board (1 of 6) Schematic Diagram 105	14.59. SU-Board Schematic Diagram (42 inch)	125
14.40.	D-Board (2 of 6) Schematic Diagram 106	14.60. SD-Board Block Diagram	· 126
14.41.	D-Board (3 of 6) Schematic Diagram 107	14.61. SD-Board Schematic Diagram (37 inch)	127
14.42.	D-Board (4 of 6) Schematic Diagram 108	14.62. SD-Board Schematic Diagram (42 inch)	128
14.43.	D-Board (5 of 6) Schematic Diagram 109	14.63. SS-Board Block Diagram	· 129
14.44.	D-Board (6 of 6) Schematic Diagram 110	14.64. SS-Board Schematic Diagram	130
14.45.	C1 and C2-Board Block Diagram 111	15 Parts Location & Mechanical Replacement Parts List	131
14.46.	C1-Board (1 of 2) Schematic Diagram (37 inch) 112	15.1. Parts Location	131
14.47.	C1-Board (2 of 2) Schematic Diagram (37 inch) 113	15.2. Packing Exploded Views (1)	132
14.48.	C1-Board (1 of 2) Schematic Diagram (42 inch) 114	15.3. Packing Exploded Views (2)	133
14.49.	C1-Board (2 of 2) Schematic Diagram (42 inch) 115	15.4. Packing Exploded Views (3)	134
14.50.	C2-Board (1 of 2) Schematic Diagram (37 inch) 116	15.5. Mechanical Replacement Parts List ·····	135
14.51.	C2-Board (2 of 2) Schematic Diagram (37 inch) 117	16 Electrical Replacement Parts List	137
14.52.	C2-Board (1 of 2) Schematic Diagram (42 inch) 118	16.1. Replacement Parts List Notes	137
14.53.	C2-Board (2 of 2) Schematic Diagram (42 inch) 119	16.2. Electrical Replacement Parts List	138

# 1 Applicable signals

Applicable input signal for Component(Y, PB, PR)

Signal name	Horizontal frequency (kHz)	Vertical frequency (Hz)
525(480)/60i	15.73	59.94
525(480)/60p	31.47	59.94
625(576)/50i	15.63	50.00
625(576)/50p	31.25	50.00
750(720)/50p	37.50	50.00
750(720)/60p	45.00	60.00
1125(1080)/50i	28.13	50.00
1125(1080)/60i	33.75	60.00

**Note:** Signals other than above may not be displayed properly.

## 2 Safety Precautions

### 2.1. General Guidelines

- 1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
- 2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
- 3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

### 2.2. Touch-Current Check

- 1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
- 2. Connect a measuring network for touch currents between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
- 3. Use Leakage Current Tester (Simpson 228 or equivalent) to measure the potential across the measuring network.
- 4. Check each exposed metallic part, and measure the voltage at each point.
- 5. Reserve the AC plug in the AC outlet and repeat each of the above measure.
- 6. The potential at any point (TOUGH CURRENT) expressed as voltage  $U_1$  and  $U_2$ , does not exceed the following values:

For a. c.:  $U_1 = 35 \text{ V (peak)}$  and  $U_2 = 0.35 \text{ V (peak)}$ ;

For d. c.:  $U_1 = 1.0 \text{ V}$ ,


#### Note:

The limit value of  $U_2 = 0.35 \text{ V}$  (peak) for a. c. and  $U_1 = 1.0 \text{ V}$  for d. c. correspond to the values 0.7 mA (peak) a. c. and 2.0 mA d. c.

The limit value  $U_1 = 35 \text{ V}$  (peak) for a. c. correspond to the value 70 mA (peak) a. c. for frequencies greater than 100 kHz.

7. In case a measurement is out of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

### Measuring network for TOUCH CURRENTS

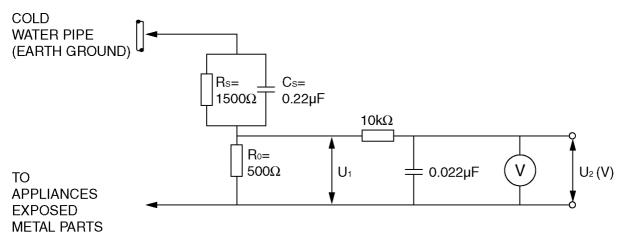

Resistance values in ohms  $(\Omega)$ 

V: Voltmeter or oscilloscope (r.m.s. or peak reading)

Input resistance:  $\geq$  1 M $\Omega$  Input capacitance:  $\leq$  200 pF

Frequency range: 15 Hz to 1 MHz and d.c. respectively

NOTE - Appropriate measures should be taken to obtain the correct value in case of non-sinusoidal waveforms.

Figure 1

# 3 Prevention of Electro Static Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).

- 1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
- 2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as alminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
- 3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
- 4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
- 5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
- 6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, alminum foil or comparable conductive material).
- 7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

#### Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise hamless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

### **IMPORTANT SAFETY NOTICE**

There are special components used in this equipment which are imporant for safety.

These parts are marked by  $\triangle$  in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

## 4 About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).


That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf Symbol stamped on the back of PCB.


#### Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is  $50 \sim 70$  °F ( $30\sim40$  °C) higher. Please use a high temperature soldering iron and set it to  $700 \pm 20$  °F ( $370 \pm 10$  °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).
   If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

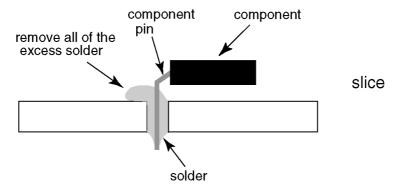


### Suggested Pb free solder

There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

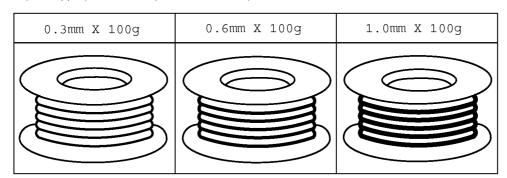

# 5 Service Hint

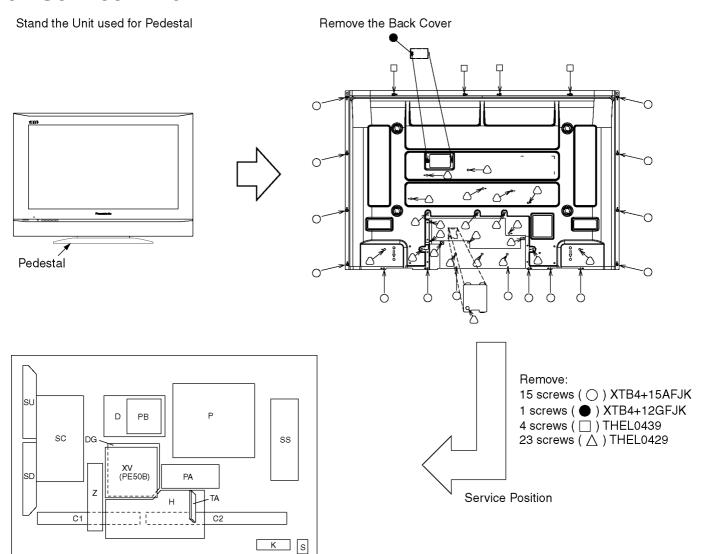

Board Name	Function	Board Name	Function
Р	Power Supply	C1	Data Driver (Left)
PA	DC-DC Converter, Power SOS	C2	Data Driver (Right)
PB	Audio Power	SC	Scan Drive
Н	AV Terminal, AV Switch, MSP	SU	Scan out (Upper)
TA	Tuner	SD	Scan out (Lower)
XV (PE50B)	D-TV Interface	SS	Sustain Drive
DG	Digital Signal Processor	K	Remote receiver, Keyscan
Z	Speaker AMP	S	Power Switch
D	Format Converter, Plasma Al Processor		

## 6 Plasma panel replacement method

### 6.1. Remove the Back cover.


1. See Service Hint (Section 5).

### 6.2. Remove the P-Board.

### Caution:


To remove P.C.B., wait 1 minute after power was off for discharge from electrolisis capacitors.

- 1. Disconnect the couplers (P2, P5, P9, P10, P11, P12, P23, P25 and P30).
- 2. Remove the screws (×5 →) and remove the P-Board.



### 6.3. Remove the PB-Board


- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (PB5, PB7, PB30, PB33 and PB34).
- 3. Remove the screws (×3 ➡) and remove the PB-Board metal frame.
- 4. Remove the screws (× 4 → ) and remove the PB-Board.

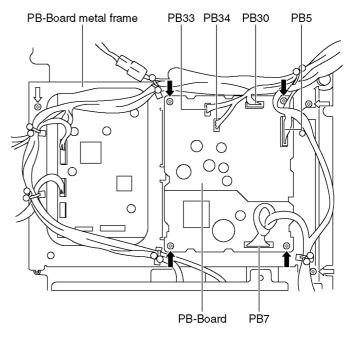

### 6.4. Remove the D-Board


- 1. Remove the PB-Board.
- 2. Disconnect the couplers (D3, D5, D20 and D25) and
- 3. Disconnect the flexible cables (D33 and D34).
- 4. Remove the screws (×4 

  ) and remove the D-Board.

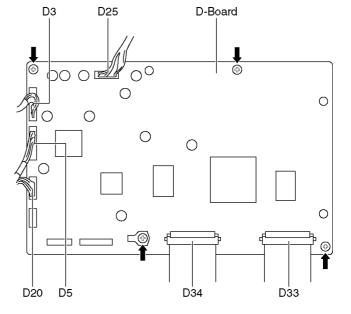


# 6.5. Remove the rear terminal cover

- 1. Remove the screws ( $\times 4 \Rightarrow$ ), and rhe screw ( $\times 7 \Rightarrow$ ).
- 2. Remove the rear terminal cover.

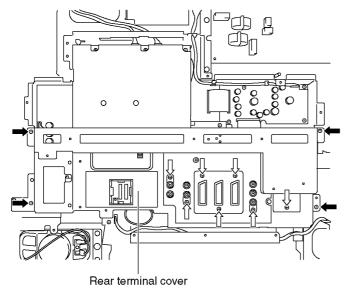


### 6.6. Remove the metal frame

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (D3, D5, H7, P10 and PB7) and relay connector (SP-R, SP-L).
- 3. Remove the screws (×4 → ) remove the metal frame.

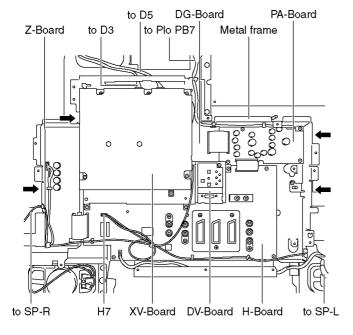


# 6.7. Remove the XV-Board (PE50B only)

- 1. Disconnect the antenna cable.
- 2. Remove the screws (×5 → ).
- Remove the XV-Board unit.
   (Be careful the couplers (XV22 and DG22) when remove the XV-Board unit.)
- Remove the screws (×5 ⇒).
- 5. Remove the XV-Board.

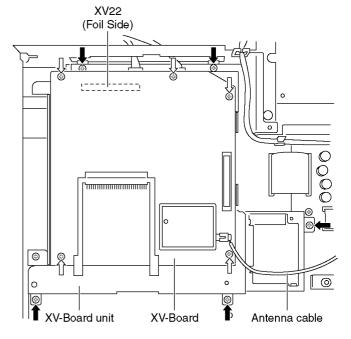


### 6.8. Remove the DG-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (DG3 and DG5).
- 3. Disconnect the flexible cables (DG1, DG2 and DG20).
- 4. Remove the screws (×2 → ) and remove the DG-Board.




# 6.9. Remove the H-Board and TA-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Remove the screws (×2 -> ) and remove the TA-Board.
- 3. Disconnect the coupler (H53).
- 4. Disconnect the flexible ables (H1, H2, H30 and H50).
- 5. Remove the screws (×3 ⇒) and remove the H-Board.




### 6.10. Remove the PA-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (PA7 and PA10).
- 3. Disconnect the flexible cables (PA20 and PA30).
- 4. Remove the screws (×4 → ) and remove the PA-Board.

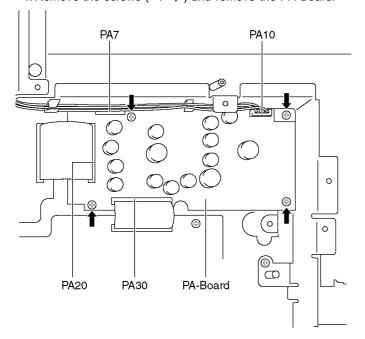


### 6.11. Remove the Z-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the coupler (Z2).
- 3. Disconnect the flexible cable (Z50).
- 4. Remove the screws (×2 → ) and remove the Z-Board.




### 6.12. Remove the SU-Board

- 1. Remove the screws (×2 →)
- Slide the SU-Board to the left to disconnect from a coupler (SC41 - SU41) on the SC-Board and disconnect a coupler (SU45 or SC45).




3. Disconnect the flexible cables (SU1, SU2, SU3) connected to the SU-Board, and remove the SU-Board.




### 6.13. Remove the SD-Board

- 1. Remove the screws (×2 →)
- Slide the SD-Board to the left to disconnect from a coupler (SC42 - SD42) on the SC-Board and disconnect a coupler (SD46 or SC46).




3. Disconnect the flexible cables (SD1, SD2, SD3) connected to the SU-Board, and remove the SD-Board.




### 6.14. Remove the SC-Board

- 1. Disconnect the couplers (SC2, SC20, SC23).
- 2. Remove the screws (×6 → ) and remove the SC-Board.




### 6.15. Remove the SS-Board

- 1. Disconnect the couplers (SS11, SS12, SS23 and SS34).
- 2. Disconnect the flexible cables (SS41, SS42, SS43 and SS44).
- 3. Remove the screws (×6 → ) and remove the SS-Board.




### 6.16. Remove the C1-Board

- Remove the flexible cables holder fastening screws (×6
   ⇒).
- 2. Disconnect the flexible cables (CB1, CB2 and CB3).
- 3. Disconnect the flexible cable (C11).
- 4. Disconnect the coupler (C12).
- 5. Remove the screws (×3 -> ) and remove the C1-Board.

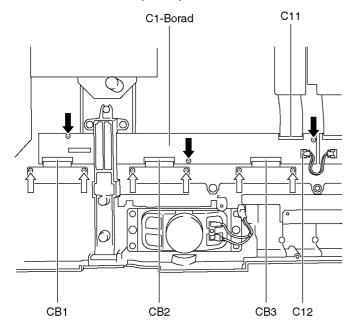


### 6.17. Remove the C2-Board

- 2. Disconnect the flexible cables (CB4, CB5, CB6 and CB7).
- 3. Disconnect the flexible cable (C21).
- 4. Disconnect the couplers (C22 and C23).
- 5. Remove the screws (×3 → ) and slide the C2-Board to the left and remove the C2-Board.

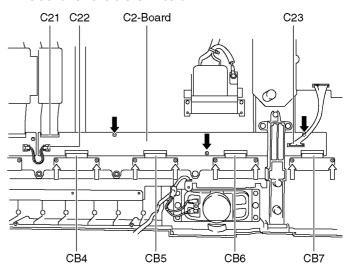


### 6.18. Remove the K-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (H53 and SS34).
- 3. Remove the screws (×3 ➡) and remove the K-Board.

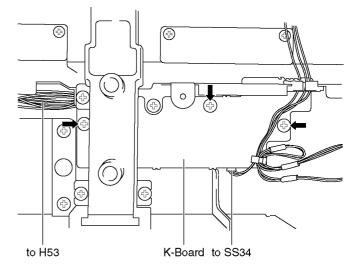


### 6.19. Remove the S-Board

1. Remove the screw (×2 → ) and remove the S-Board unit.




- 2. Unlock the cable clampers to free the cable.
- 3. Disconnect the couplers (S1 and S2).
- 4. Remove the screws (×2 → ) and remove the S-Board.




### 6.20. Remove the Speaker L, R

1. Remove the screw (×8 → ) and remove the Speaker L, R.




# 6.21. Remove the Plasma panel section from the Front frame (glass)

- 1. Remove the front frame and the plasma panel fastening screw (×8 → ).
- 2. Remove the front frame and the stand brackets fastening screw (×6 ➡).



3. For leaving the plasma panel from the front frame, pull the bottom of the front frame forward, lift, and remove.




# 6.22. Replace the plasma panel (finished).

- Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
- 2. Attach the C1-Board and the C2-Board, connect the flexible cables (×7) from the Plasma panel to the C1-Board and C2-Board, and fix the flexible cable holders.
- 3. Attach the Hooks (left, right) and fit the stand brackets (left, right) to the new plasma panel.
- 4. Place the plasma panel section on the servicing stand.
- 5. Attach the front frame and the each P.C.Board and so on, to the new plasma panel.
  - \* When fitting the front frame, be careful not to allow any debris, dust or handling residues to remain between the front glass and plasma panel.

# 7 Location of Lead Wiring

# 7.1. Lead of Wiring (1)

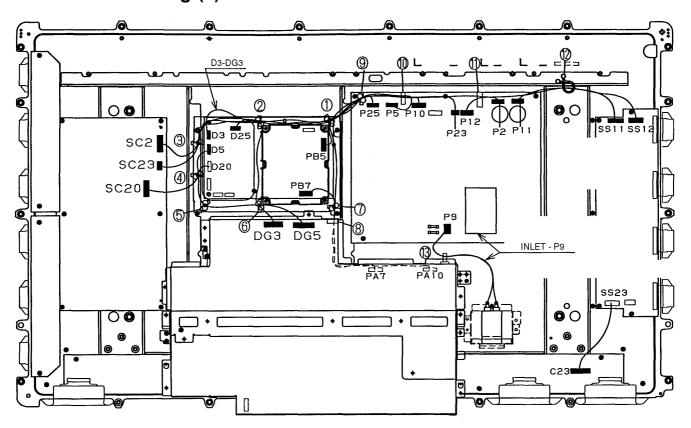


# 7.2. Lead of Wiring (2)

CON : No. ——— CON : No.	1	2	3	4	(5)	6	7	8	9	10	(11)	12	13
SC2 — P9			$\bigcirc$							$\bigcirc$	$\bigcirc$		
SC23 — P23													
SC20 — D20													
DG3 — D3						$\bigcirc$							
DG5 — D5					$\bigcirc$	$\bigcirc$							
D25 — P25													
PB5 — P5													
PA7 — PB7							$\bigcirc$	$\bigcirc$					
PA10 — P10							$\bigcirc$	$\bigcirc$					
SS11 — P11												$\bigcirc$	
SS12 — P12											$\bigcirc$	$\bigcirc$	
SS23 — C23													
AC INLET — P9													$\bigcirc$
													·

Connector Connection: P2, P5, P9, P10, P11, P12, P23,, P25

D3, D5, D25, PB7, PB5, SC2, SC20, SC23, SS11, SS12, DG3, DG5, C23


# 7.3. Lead of Wiring (3)

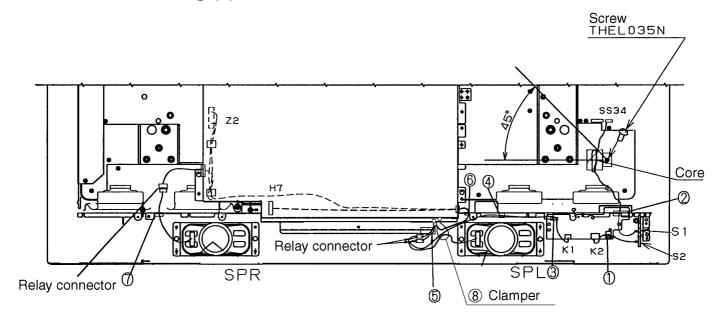

CON : No. —	CON : No.	(E)	2	3	4	(5)	6	7	8		
S1 —	SS34		0								
K2 —	H7			$\bigcirc$	0	0	0		0		
SP L	Z2					$\bigcirc$	$\bigcirc$		$\bigcirc$		
SPR —	Z2							$\bigcirc$			
S2 —	K2	$\bigcirc$									

### 8 Self Check

- 1. Self-Check is used to automatically check the bus lines and hexadecimal code of the TV set.
- 2. To get into the Self -Check mode press the Down (-/V) button on the customer controls at the front of the set, at the same time pressing the Status button on the remote control, and the screen will show:

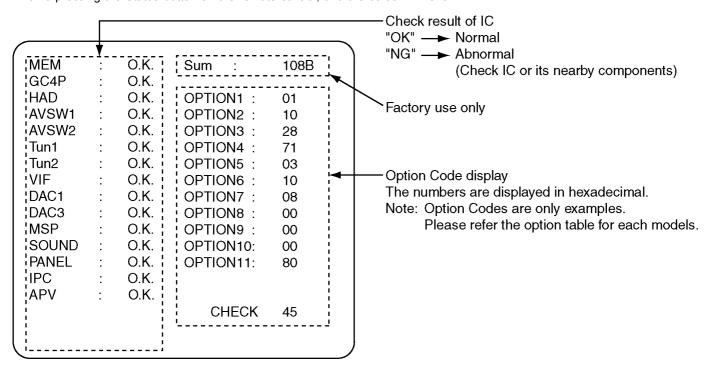

If the CCU ports have been checked and found to be incorrect or not located then "--" will appear in place of "O.K.".

Display	Ref.No	Description	P.C.B.
MEM	IC1107	EEPROM	DG-Board
GC4P	IC4026	Global Core for Main	DG-Board
HAD	IC4012	OSD RGB A/D	DG-Board
AVSW1	IC2105	Video SW	H-Board
AVSW2	IC3005	Audio SW	H-Board
Tun1	TU001	Tuner	TA-Board
Tun2	TU8001	Tuner	XV-Board
VIF	-	-	-
DAC1	IC1106	Ext. DAC	DG-Board
DAC3	IC3006	Ext. DAC	H-Board
MSP	IC2106	Multi Sound Processor	H-Board
SOUND	IC2300	Sound Control	Z-Board
PANEL	-	Panel	-
IPC	IC8013	HDSL PEAKS Lite	XV-Board
ADV	IC4005	10bit A/D	DG-Board

### 8.1. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinkes of the Power LED on the front panel of the unit.


Blinking Times	Blinking timing	Contents & Check point
1	Once 3 sec  →	No particular check point
10		Tuner SOS (No power for tuner)
12		Sound SOS

### 8.2. No Power


First check point

There are following 3 states of No Power indication by power LED.


- 1. No lit
- 2. Green is lit then turns red blinking a few seconds later.
- 3. Only red is lit.
- 1. No lit

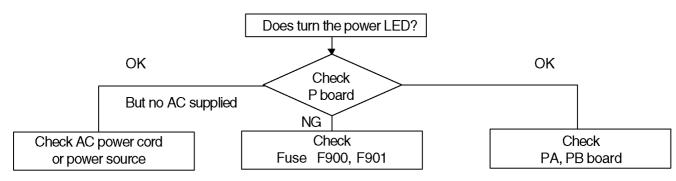

### 8.3. No Picture

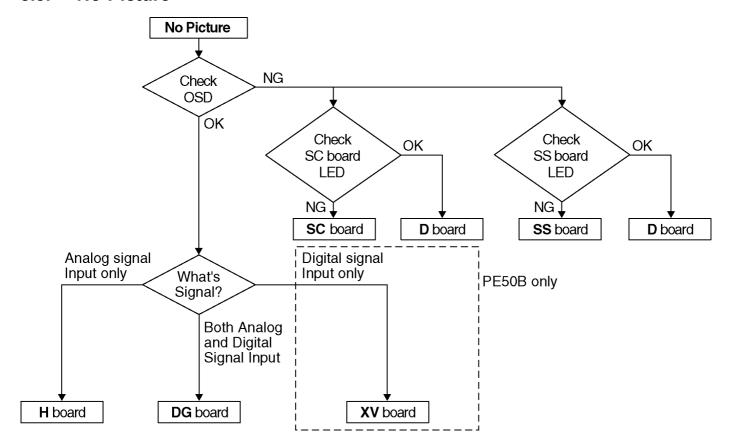


Drive circuits LED indicator

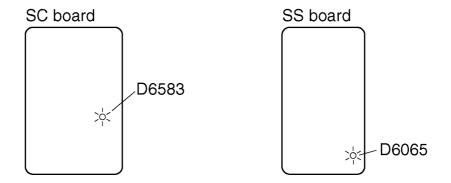

### 8.4. Local screen failure

Plasma display may have local area failure on the screen. Fig - 1 is the possible defect P.C.B. for each local area.

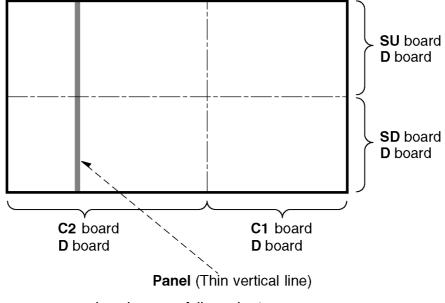

<Local screen failure chart>

Fig - 1

### 9 Service Mode Function

MPU controls the functions switching for each IICs through IIC bus in this chassis. The following setting and adjustment can be adjusted by remote control in Service Mode.

### 9.1. How to enter SERVICE 1

- 1. In sound menu, set BASS to MAXIMUM, and set TREBLE to MINIMUM.
- 2. Simultaneously press **INDEX** button on remote control and **DOWN** button [ -/V ] on the TV set.

### 9.2. How to enter SERVICE 2

- 1. Set the channel to CH99.
- 2. Select the SPL Gain.
- 3. Press HOLD button on remote control.

### Note:

To exit to Service mode, press N or Power button on remote control.

#### **SERVICE 1** M2P DP 05 FOR TEST! V0. 025r 18/3/2005 Service 1 [GREEN] [GREEN] [GREEN] FIRMWARE ACQ\_VO2. 08.00 TDC\_VI. 05.00 M2\_GDI Version 1.27 Test Pattern Sub-Contrast Panel type 0 Access 740 Panel Adjustment Flash PROGRAM Ext >> TV [RED] [RED] [RED] E2 PROGRAM TV >> Ext Ext >> TV [RED] [GREEN] STR : ENTER [RED] [RED] [RED] [RED] [RED] All-Cut off B-Drive G-Drive R-Drive All Drive Video Gain2 128 252 252 252 252 25 [GREEN] [GREEN] [GREEN] [GREEN] [GREEN] [RED] [GREEN] [GREEN] [GREEN] [GREEN] [GREEN] R-Cut off G-Cut off B-Cut off Sub-Bright SPL Gain 128 128 128 2048 0 [RED] [RED] [RED] [RED] CH99+[INDEX] CH99+[HOLD] **SERVICE 2** 99 PANASONIC FOR TEST! V0. 2340 18/3/2005 Service 2 [GREEN] [GREEN] [GREEN] FIRMWARE ACQ\_VO.0800 TDC\_VO.0500 M2\_GDI Version 1.27 Y/C Delay OPTION1 OPTION2 5 Panel Adjustment Flash PROGRAM Ext >> TV [RED] [RED] [RED] E2 PROGRAM TV >> Ext Ext >> TV [RED] [GREEN] STR : ENTER [RED] [RED] [RED] [RED] OPTION6 OPTION5 OPTION4 OPTION3 OPTION7 [GREEN] [GREEN] [GREEN] [GREEN] [RED] [GREEN] [GREEN] [GREEN] [GREEN] [GREEN] OPTION8 OPTION9 OPTION10 OPTION11 OPTION12 [RED] [RED] [RED] [RED] [RED] [GREEN] [RED] [RED] [RED] Sub-Colour Sub-Contrast OPTION13 Hours 25 740 [GREEN] [GREEN] [GREEN]

### Key Command

- Press the RED/GREEN button to step up/down through the functions.
- · Press the **YELLOW/BLUE** button to change the function values.
- Press the **OK** button after each adjustment has been mode to store the required values.

# 9.3. Option Description

	PA50E	PE50B		
option1	4F	01		
bo	1	1	Colour system	Auto(1)
b1	1	0		SECAM(1)
b2	1	0		NTSC(1)
b3	1	0		M.NTSC(1)
b4	0	0	A2 select 6.5MHz	5.742MHz(0) 6.742MHz(1)
b5	0	0	SIF	l only(0), BG only(1)
b6	1	0		I/BG/DK/L(2), BG/DK(3)
b7	0	0	free	
option2	11	10		
b0	1	0	A2 enable	enable(1)
b1	0	0		not use
b2	0	0		not use
b3	0	0	NICAM enable	not use
b4 b5	0	0	INICAWI enable	enable(1) not use
b6	0	0		not use
b7	0	0		not use
option3	3A	28		1101.000
b0	0 0	0	SASO enable	SASO enable(1)
b1	1	0	Fine tuning	Enable(1)
b2	0	0	Search speed	Slow(1) Fast(0)
b3	1	1	Tuner	MACO tuner (1), Others (0)
b4	1	0	HYPER	UHF only (0), UHF/VHF (1)
b5	1	1	IF I2C	I2C controlled Tuner IF module (1)
b6	0	0	NICAM C4 bit	enable(1)
b7	0	0	Blue Back	BLUE BACK on/off selection in menu(0)
option4	D9	71		
b0	1	1	Aspect AUTO	enable(1)
b1	0	0	S1/S2 enable	enable(1)
b2	0	0	ID-1	enable(1)
b3	1	0	User aspect Just	enable(1)
b4	1	1	User aspect 14:9	enable(1)
b5 b6	0	1	ALBD 14:9 TEXT	14:9 enable, Zoom3 disable at self wide(1)/ Zoom1, Zoom3 enable at self wide (0) enable(1)
b7	1	0	TEXT TOP	TOP enable (1)
option5	03	03	TEXT TO	TOT CHABIC (1)
b0	1	1	CH Blanking	Blanking enable (1)
b1	1	1	AV Blanking	Blanking enable (1)
b2	0	0	Noise mute	Noise mute enable(0)
b3	0	0	sub picture	without sub-picture(0), with sub-picture(1)
b4	0	0	2tuner	2tuner(1),1tuner(0)
b5	0	0	AV Input	3rotation(1) / 2rotation without front RCA (0)
b6	0	0	Panel (LCD)	Samsung Panel(1)/SHARP Panel(0)
b7	0	0	Large size (LCD)	32(1)/26(0) for LCD
option <u>6</u>	00	10		
b0	0	0	SD module	with SD module (1)
b1	0	0	SD module Ext.Rec(PAL)	enable(1)
b2	0	0	SD module Ext.Rec(NTSC)	enable(1)
b3	0	0	SD module Ext.Rec(SECAM)	enable(1)
b4 b5	0	1	IDTV HDMI	enable(1) enable(1)
b6	0	0	Ext. HV input	without HV input(0) / with HV input(1)
b7	0	0	PC	enable(1)
option7	0	08	. ~	Inimpo(1)
bo	0	08	Asia	Asia(1),europe(0)
b1	0	0	Asia Australia	not use
b2	0	0	Ireland/India	Ireland(1)
b3	0	1	UK/Korea	UK(1)
b4	0	0	Lang1	not use
b5	0	0	Lang2	not use
b6	0	0	Lower POS	not use
b7	0	0	Owner ID	not use
•				

		PA50E	PE50B		
option	╗┤			F	
option		78	00	Euro option	TAOL 11 (4) 1 AL II 1 (6)
	b0	0	0	ACI all country	ACI enable(1), only Netherlands(0)
	b1	0	0	ACI auto MP	ACI auto multi package enable (1)
	b2	0	0	ACI offset	ACI offset for VCR prog. enable(1)
	b3	1	0	Power up EC-Mode	Power on EC enable (1)
	b4	1	0	AVLink	Q-Link off selectable in menu (1)
	b5	1	0	Volume correction	TV Volume coorrection enable (1)
	b6	1	0	MPX/NICAM display	Display NICAM (0), Display MPX (1)
	b7	0	0	Albd Reset Off	enable(1)
option	19	00	00		
	b0	0	0	CH Plan	ASIA / M.E. / HK/UK / CHINA(1)
	b1	0	0		NZ/INDNES(1)
	b2	0	0		AUSTRALIA(1)
	b3	0	0		E.EUROPE(1)
	b4	0	0		SPECIAL(1)
	b5	0	0		AMERICA(1)
	b6	0	0		CATV(1)
	b7	0	0		JAPAN(1)
option	110	00	00		. , ,
'	b0	0	0	NICAM priority	ASIA/M.E.(1)
	b1	0	0	' '	HK/UK(1)
	b2	0	0		CHINA(1)
	b3	0	0		NZ/INDN(1)
	b4	0	0		AUSTRA(1)
	b5	0	0		E.EURO(1)
	b6	0	0		SPECIAL(1)
	b7	0	0	free	
option	111	80	80	Additional	
	b0	0	0	Remocon Type	Delux(1) / Leader(0)
	b1	0	0	Environment Al (PDP)	enable, with viewing mode auto (1) / disable, without viewing mode auto(0)
	b2	0	0	WSS14:9 off	WSS 14:9 off (1)
	b3	0	0	IRD Reset Check	ON(1) / OFF(0)
	b4	0	1	IRD Polling Check	ON(1) / OFF(0)
	b5	0	0	Contrast Al	enable(1) * LCD Only
	b6	0	0	Exdac4 Slave address	0x9e(1) / 0x98(0) * PDP Only
	b7	1	1	PanelMCUNew	NewMCU(1)/OldMCU(0) :: temp * PDP Only

# 10 Adjustment Procedure

# 10.1. Driver Set-up

### 10.1.1. Item / Preparation

1. Input an APL 100 % white signal.

2. Set the picture controls: -

Picture mode: Normal White balance: Cool

Aspect: 16:9


### 10.1.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label.

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	175V ± 1V	R628 (P)	*
Ve	TPVE (SS)	156V ± 1V	VR6074 (SS)	*
Vset	TPVSET (SC)	232V ± 6V	Fixed	
Vad	TPVAD (SC)	-90V ± 1V	VR6477 (SC)	
Vscn	TPVSCN (SC)	Vad+120V ± 3V	Fixed	
Vda	TPVDA (SS)	67V ± 1V	R665 (P)	
PFC	C448 (+)(-)	395V± 0.5V	R443 (P)	
Vdat	C557 (+)(-)	67V± 0.1V	R665 (P)	load current : 0.4A
Vsus	TPVsus	188V± 1V	R628 (P)	load current : 2.0A

<sup>\*</sup>See the Panel label.

### Panel Label information

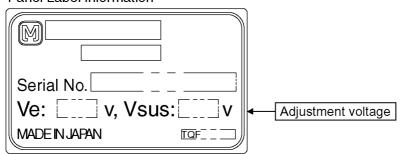


# 10.2. Initialization Pulse Adjust

- 1. Input a Cross hatch signal.
- 2. Set the picture controls: -

Picture mode: Normal White balance: Cool

Adjust the indicated test point for the specified wave form.

	Test point	Volume	Level
T1	TPSC1 (SC)		15 ± 10μ Sec
T2	TPSS1 (SS)	VR6557 (SC)	184 + 5μ / - 10μ Sec

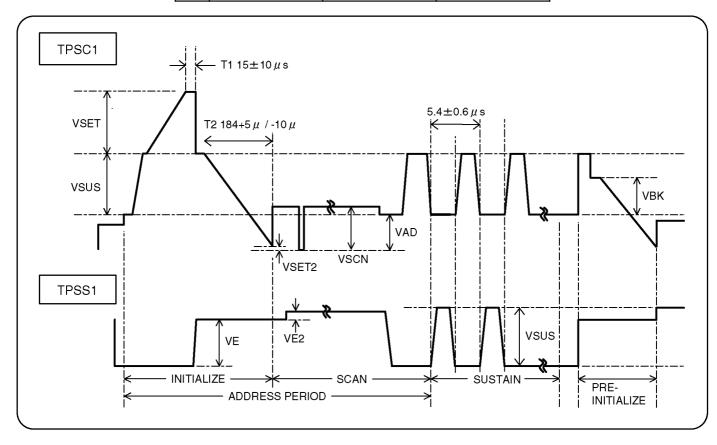

### 10.3. P.C.B. (Printed Circuit Board) exchange

### 10.3.1. Caution


1. To remove P.C.B., wait 1 minute after power was off for discharge from electrolysis capacitors.

### 10.3.2. Quick adjustment after P.C.B. exchange


P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	175V ± 1V	R628 (P)	*
	Vda	TPVDA (SS)	67V ± 1V	R665 (P)	
	PFC	C488 (+) (-) (P)	395V ± 0.5V	R443 (P)	
	Vdat	C577 (+) (-) (P)	67V ± 0.1V	R665 (P)	load current : 0.4A
	Vsus	TPVSUS (SS)	188V ± 1V	R628 (P)	load current : 2.0A
SC Board	Vad	TPVAD (SC)	-90V ± 1V	VR6477 (SC)	
	Vset	TPVSET (SC)	232V ± 6V	Fixed	
	Vscn	TPVSCN (SC)	Vad + 120 ± 3V	Fixed	
SS Board	Ve	TPVE (SS)	156V ± 1V	VR6074 (SS)	*
D, DG Board	White blance, Pedes	White blance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signals			

<sup>\*</sup>See the Panel label.

# 10.4. Adjustment Volume Location

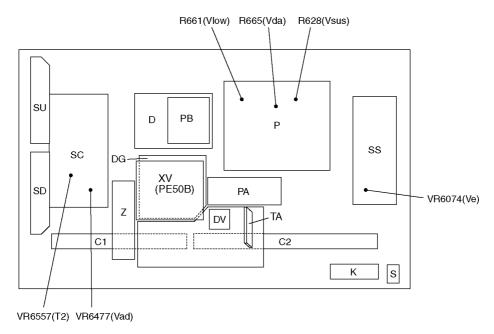

# 10.5. Test Point Location

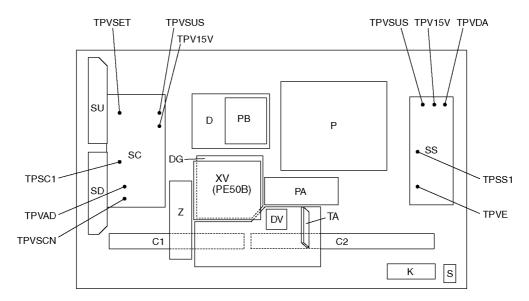

# 11 Adjustment

# 11.1. PAL panel white balance adjustment

Instrument Name	Connection	Remarks
· W/B pattern	RF input	User setting: Normal
· Color analyzer (Minolta CA-100 or equivalent)	Panel surface	
Procedure		Remarks
<ul> <li>Ensure aging is adequate (Longer than 15min.)</li> </ul>	Picture menu : Dynamic	
· Make sure the front panel to be used on the final s	et is fitted.	ASPECT: 16:9
· Make sure a color signal is not being shown before	e adjustment.	
· Put the color analyzer where there is little color var	iation.	
Display the white balance pattern.		· Highlight section
2. Check that the color balance is "cool".		Signal amplitude 75%
3. Enter the <service-menu1> mode.</service-menu1>		PAL
<ol> <li>Select "G-CUTOFF" item, using the color-key "Red" or "Green", and set to "128", using the color-key "Yellow" or "Blue".</li> </ol>		White Balance
Also, "B-CUTOFF" and "R-CUTOFF" set to "128"		Pattern
5. Set "G-DRIVE" at "224"(37/42").		
6. Touch the signal receiver of color analyzer to the drive and R drive so x, y become the "Color balance"	0 0	
7. Set "ALL-DRIVE" to "252".		High light 75%  Low light 15%
8. Set colorbalance to "Normal".		
9. Fix G cutoff, B cutoff and R cutoff at "128".		
10. Fix G drive at "224"(37/42").		
11. Adjust B drive and R drive so the highlight wind "Normal" in the below table.	Low light 1378	
12. Set "ALL-DRIVE" to "252".		
13. Set color balance to "Warm".		
14. Set G cutoff, B cutoff and R cutoff to "128".		
15. Set G drive to "224"(37/42").		
16. Adjust B drive and R drive so the highlight window's shown in the below table.		
17. Set "ALL-DRIVE" to "252".		

# 11.2. 1080i white balance adjustment

4000: M/D		Remarks	
· 1080i W/B pattern	Comonent terminal	User setting: Normal	
· Color analyzer (Minolta CA-100 or equivalent)	Panel surface		
Procedure	•	Remarks	
· Ensure aging is adequate (Longer than 15min.)		Picture menu: Dynamic ASPECT:16:9	
· Make sure the front panel to be used on the final	set is fitted.		
· Make sure a color signal is not being shown befo	re adjustment.		
• Put the color analyzer where there is little color va	ariation.		
Display the white balance pattern.		· Highlight section	
2. Check that the color balance is "cool".		Signal amplitude 75%	
3. Enter the <service-menu1> mode.</service-menu1>			
4. Select "G-CUTOFF" item, using the color-key "Re	d" or "Green", and set to "128", using the	1080i	
color-key "Yellow" or "Blue".		White Balance Pattern	
Also, "B-CUTOFF" and "R-CUTOFF" set to "128"		Pallern	
5. Set "G-DRIVE" at "224"(37/42").			
<ol><li>Touch the signal receiver of color analyzer to the drive and R drive so x, y become the "Color balan</li></ol>	OO		
7. Set "ALL-DRIVE" to "252".		High light 75%	
8. Set colorbalance to "Normal".			
9. Fix G cutoff, B cutoff and R cutoff at "128".			
10. Fix G drive at "224"(37/42").	Low light 15%		
11. Adjust B drive and R drive so the highlight wir "Normal" in the below table.			
12. Set "ALL-DRIVE" to "252".			
13. Set color balance to "Warm".			
14. Set G cutoff, B cutoff and R cutoff to "128".			
15. Set G drive to "224"(37/42").			
<ol><li>Adjust B drive and R drive so the highlight window shown in the below table.</li></ol>			
17. Set "ALL-DRIVE" to "252".			

# 11.3. Sub bright adjustment

Connection	Remarks		
Connect to the input terminal	User setting: Normal		
dure	Remarks		
· Color balance adjustment is finished for each signal.			
Do adjustments in a dark room.			
1. Display the pattern for adjusting subbright from video input.			
2. Use "Sub-Bright" in the <sevice-menu1> mode to adjuct so the top part of the step section in the below diagram faintly shows up and the middle fades away.</sevice-menu1>			
	fades away.		
Sub Bright Pattern			
		lack 2 % %	
			Connect to the input terminal dure h signal.  om video input. de to adjuct so the top part of the step sect ne middle fades away.

# 11.4. ABL adjustment


Instrument Name	Connection	Remarks	
1. HD signal emitter (Color bar signal)	COMPONENT input terminal		
2. Wattmeter	Connect the AC power of the adjustment set to the wattmeter.		
Procedure Procedure	hefere discharge (De set switch off	Remarks	
<ul> <li>Make sure the set is aged for 30 minutes or more during or after aging.)</li> </ul>	e before adjustment. (Do not switch off		
· Voltage 230V 50Hz (variation within 1%)		According to the line condition,100V can be used	
· Volume at minimum and screen size at "16:9"		4554	
Setting			
Component input, dynamic, standard			
Connect the set's AC power to the wattmeter.			
2. Input the color bar.			
3. Select the "APL MULT" item in the Serivice1.			
4. Adjust APL MULT so the set's power consumption	is		
TH-42PA50E 309 ± 10W			
TH-42PE50B 317 ± 10W			
TH-37PA50E 239 ± 10W			
TH-37PE50B 247 ± 10W			
1. The initial data are			
0x25 for 37/42SD (A0-0626)			
0x1E for 37HD (A0-0426)			
0x24 for 42HD (A0-0826)	0x24 for 42HD (A0-0826)		
0x1D for 50HD (A0-0A26)			
2. The power and data are in reverse relationship			
(Lower the data to raise the power.)			
· Raising direction ( $\uparrow$ ):20 $\rightarrow$ 1F			
• Lowering direction ( $\downarrow$ ):20 $\rightarrow$ 1A			
(↑):20 → 1F			
$(\downarrow)$ :20 $\rightarrow$ 1A			

### 12 Hotel mode

#### 1. Purpose

Restrict a function for hotels.

- 2. Access command
  - · Enter to the Service 2 Mode.
  - Press Status button on remote control and entry to the EAROM EDITOR Mode.
  - · Set the data of EEPROM(ADDRESS 140) to 80.
  - · Press the OK button to memorize the data.

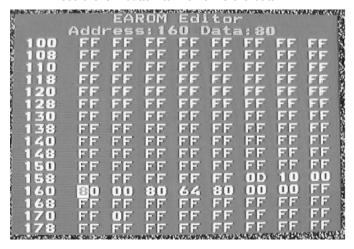

Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.

It can be made Hotel mode.

- 3. Exit command
  - · First, set the data of EEPROM(ADDRESS 140) to 00.

Next, Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.

Then, it is no longer hotel mode.

- 4. Access command to the Hotel mode setup menu
  - <Prerequisite> : It is conditions that the data of EEPROM(ADDRESS 140) is 80.

In order to display the Hotel mode setup menu, please enter the following command (within 2 second).

[TV]:down + [REMOTE]:TV/AV(3 times)

Then, the Hotel mode setup menu is displayed.



5. Explain the Hotel mode setup menu

### CAUTION

This setup is not valid, unless data of EEPROM(ADDRESS 160) will be C0, even if each settings were done.

item	Function
Initial INPUT	Select input signal modes.
	Set this signal, each time power is switched on.   <selection> :</selection>
	Off/TV/AV1/AV2/AV2S/AV3/Av3S/AV4/Av4S/AV4 C/PC
	Off: give priority to a last memory. However, Euro model is compulsorily set to TV.
	· AVnS/AVnC: only Euro model selectable
	PC: selectable with VGA option
Initial VOL level	Adjust output Volume. Set this volume, each time power is switched on. If the value of InitVol is changed, volume will change. However, priority is given to a last memory when InitVol is Off. When "InitVol" is larger than "MaxVol", make "InitVol" and "MaxVol" the same. <selection range="">: Off/0 to 100</selection>
Maximum VOL	Off: give priority to a last memory  Adjust maximum valums.
level	Adjust maximum volume. Set this max. volume, each time power is
	switched on.
	When "MaxVol" is smaller than "InitVol", make "MaxVol" and "InitVol" the same, if "InitVol" is not
	Off.
	<range> :</range>
Initial POS	0 to 100 Select programme number.
	Set this programme number, each time power is switched on. <selection>: Off/0 to 99 (Euro model)</selection>
D. 11	Off: give priority to a last memory
Button lock	Select local key conditions. Set this condition, each time power is switched on.
	<pre>Selection&gt; : Off/SETUPMENU/All</pre>
	SETUP: restrict F-key selection
	(Tuning guide(menu) can not be selected.)
	MENU: restrict F-key selection
	(only Volume/Mute can be selected.)
	All: altogether invalid.
Remote lock	Select remote control key conditions. Set this condition, each time power is switched
	on. <selection>:</selection>
	Off/SETUP/MENU
	Off: altogether valid
	SETUP: only Setup menu is invalid
	MENU: Picture/Sound/Setup menu are invalid

## 14 Block and Schematic Diagram

## 14.1. Schematic Diagram Notes

#### **Important Safety Notice**

Components identified by  $\triangle$  mark have special characteristics important for safety. When replacing any of these components, use only manufacture's specified parts.

#### Notes:

1. Resistor

Unit of resistance is OHM  $[\Omega]$  (K=1,000, M=1,000,000).

2. Capacitor

Unit of capacitance is µF, unless otherwise noted.

3. Coi

Unit of inductance is H, unless otherwise noted.

4. Test Point

○ : Test Point position

5. Earth Symbol

6. Voltage Measurement

Voltage is measured by a DC voltmeter.

Conditions of the measurement are the following:

7. When arrow mark ( / ) is found, connection is easily found from the direction of arrow.

8. Indicates the major signal flow. : Video → Audio ⇒

9. This schematic diagram is the latest at the time of printing and subject to change without notice.

#### Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.


The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.

All circuits, except the Power Circuit, are cold.


Precautions

- a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
- b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
   Connect the earth of instruments to the earth connection of the circuit being
- d. Make sure to disconnect the power plug before removing the chassis.

## 14.2. Main Block Diagram

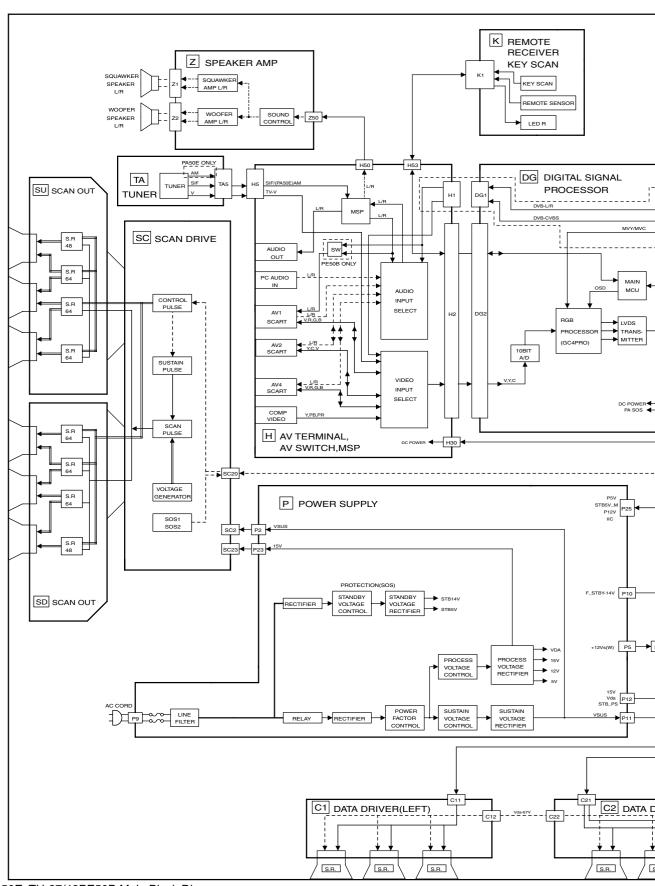


TH-37/42PA50E, TH-37/42PE50B Main Block Diagram

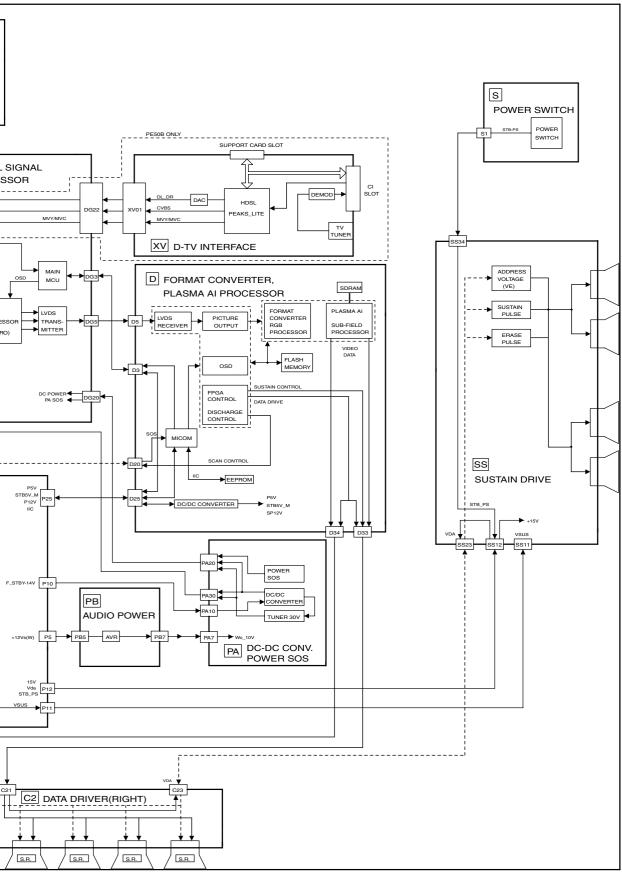


TH-37/42PA50E, TH-37/42PE50B Main Block Diagram


### 14.3. P-Board Block Diagram

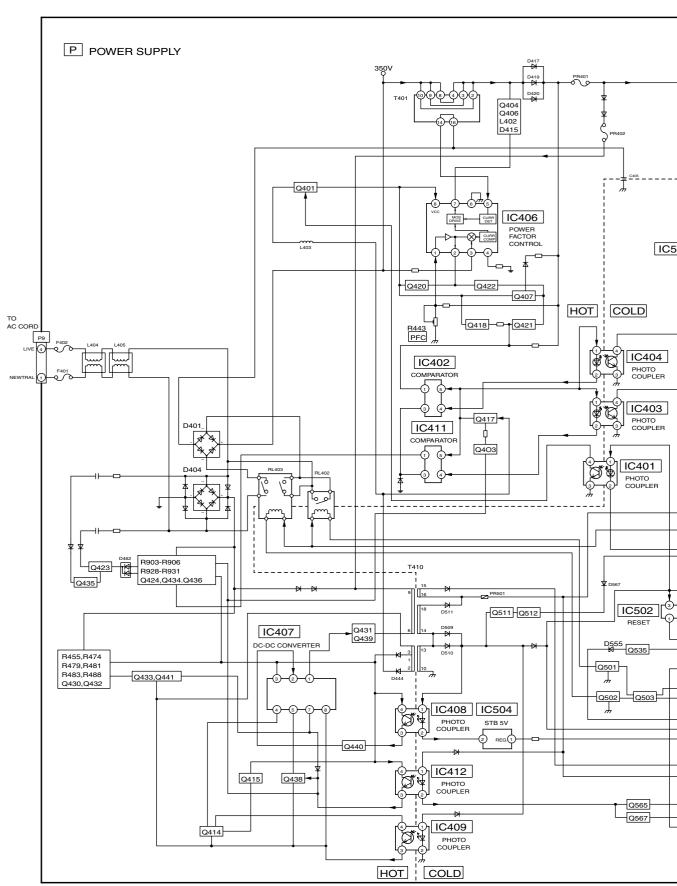


TH-37/42PA50E, TH-37/42PE50B P-Board Block Diagram

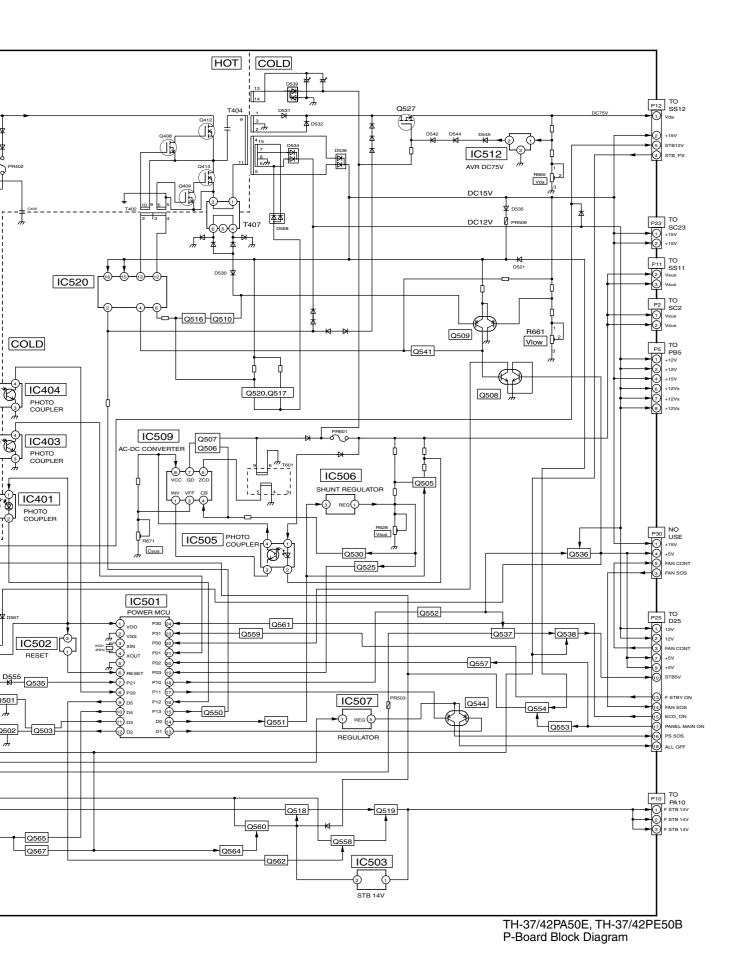


# 14.4. P-Board (1 of 6) Schematic Diagram

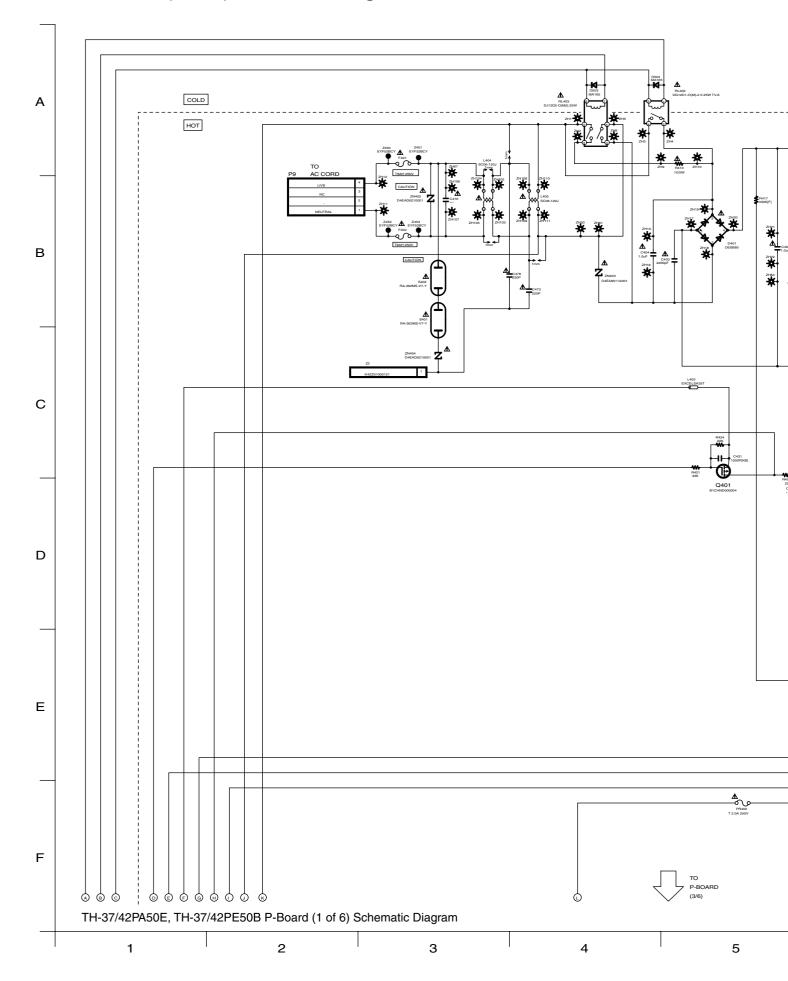


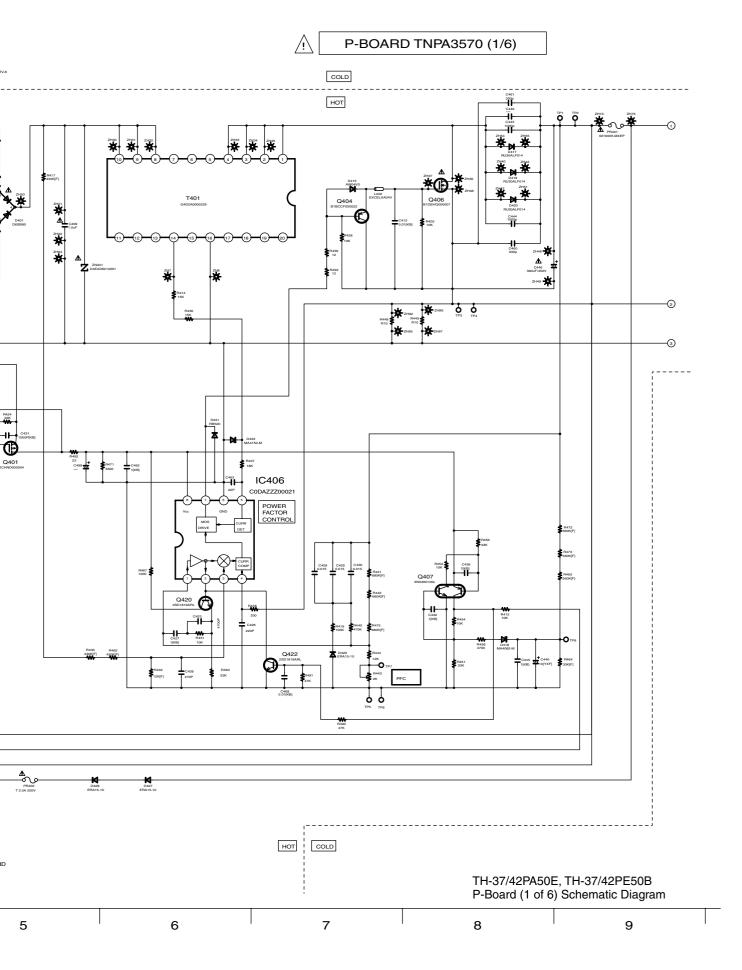


## -----


# 14.5. P-Board (2 of 6) Schematic Diagram

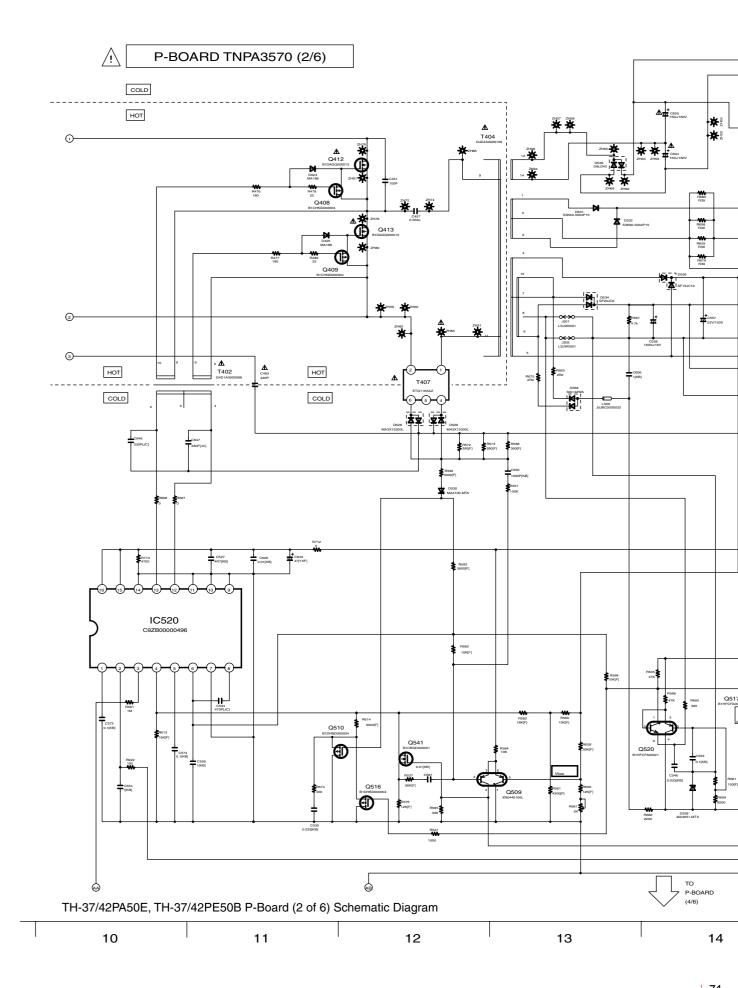

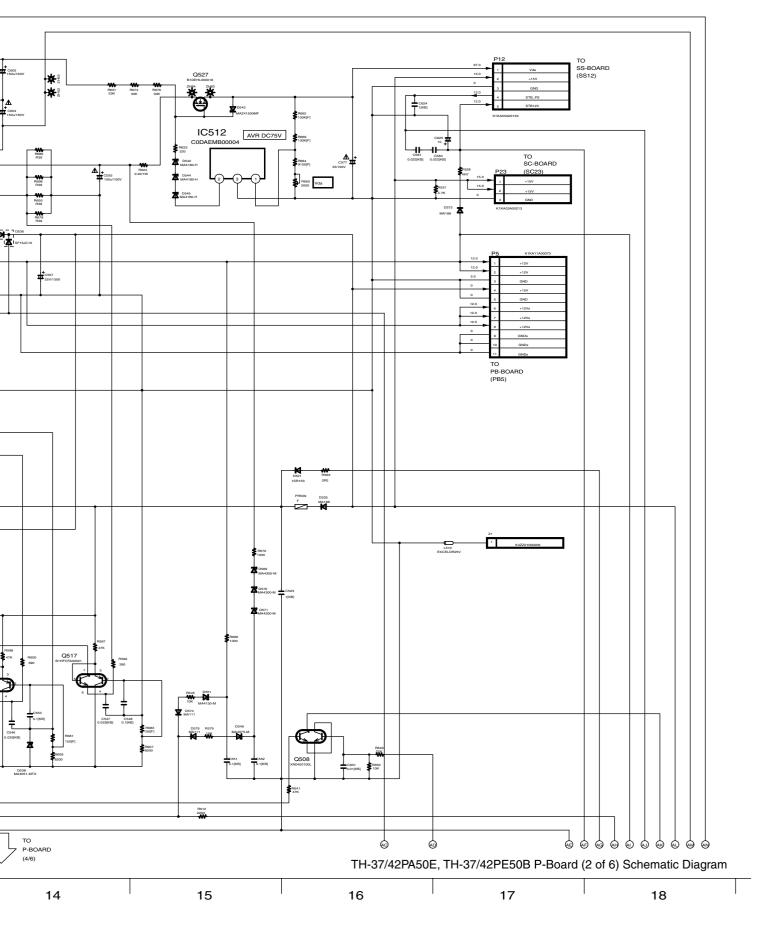



# 14.6. P-Board (3 of 6) Schematic Diagram

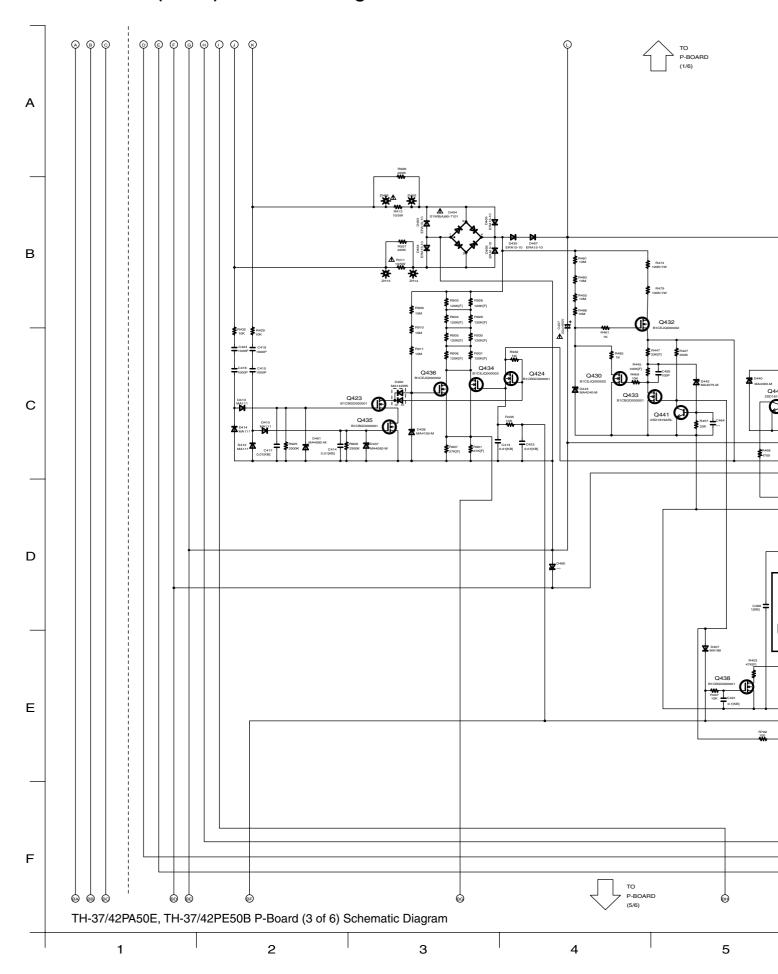

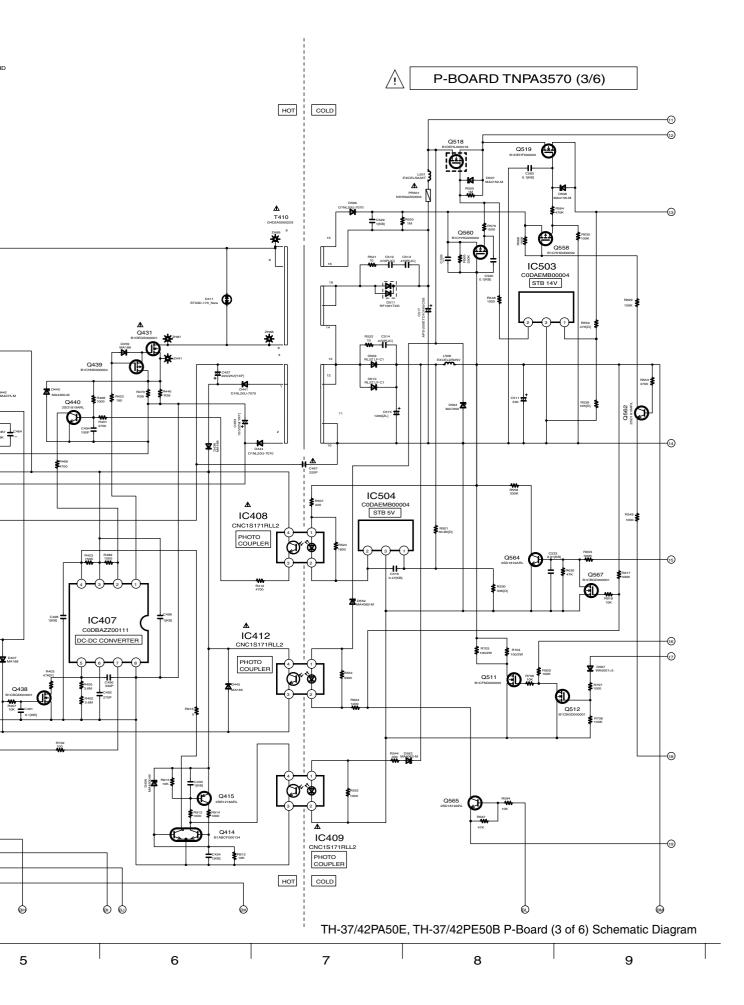



# 14.7. P-Board (4 of 6) Schematic Diagram

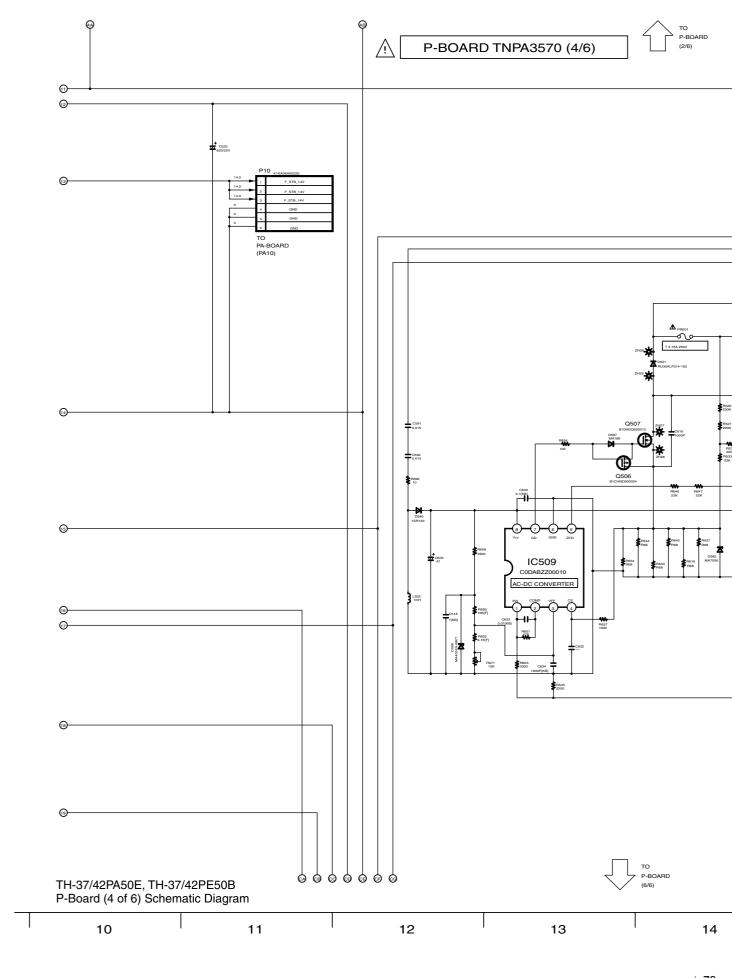

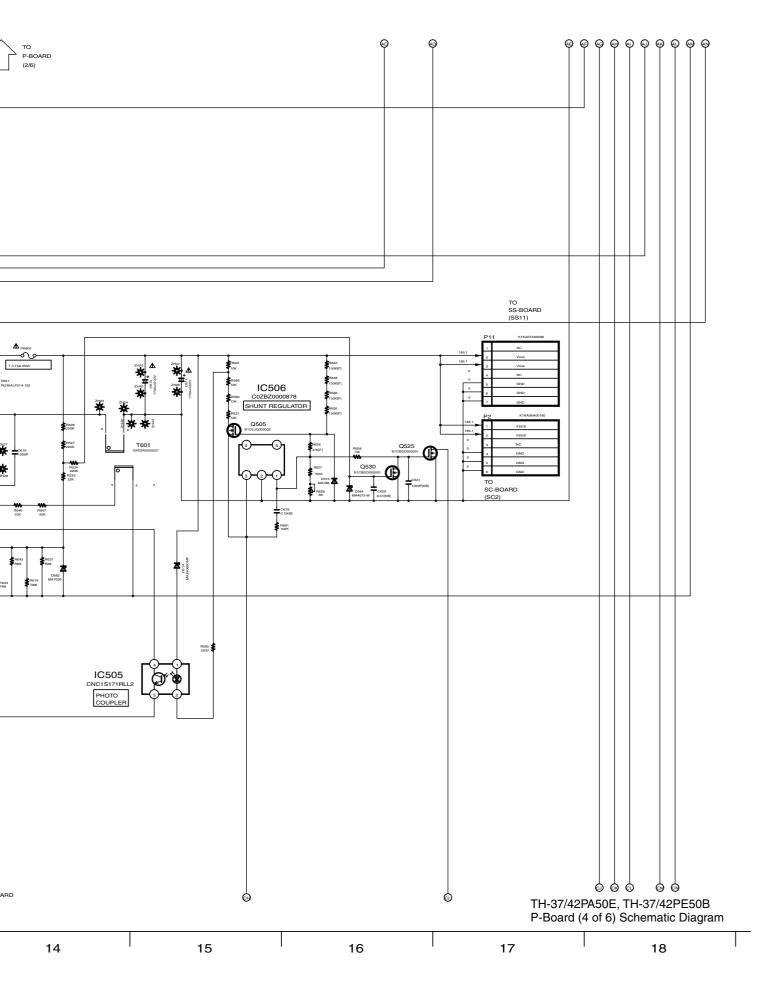


## 14.8. P-Board (5 of 6) Schematic Diagram

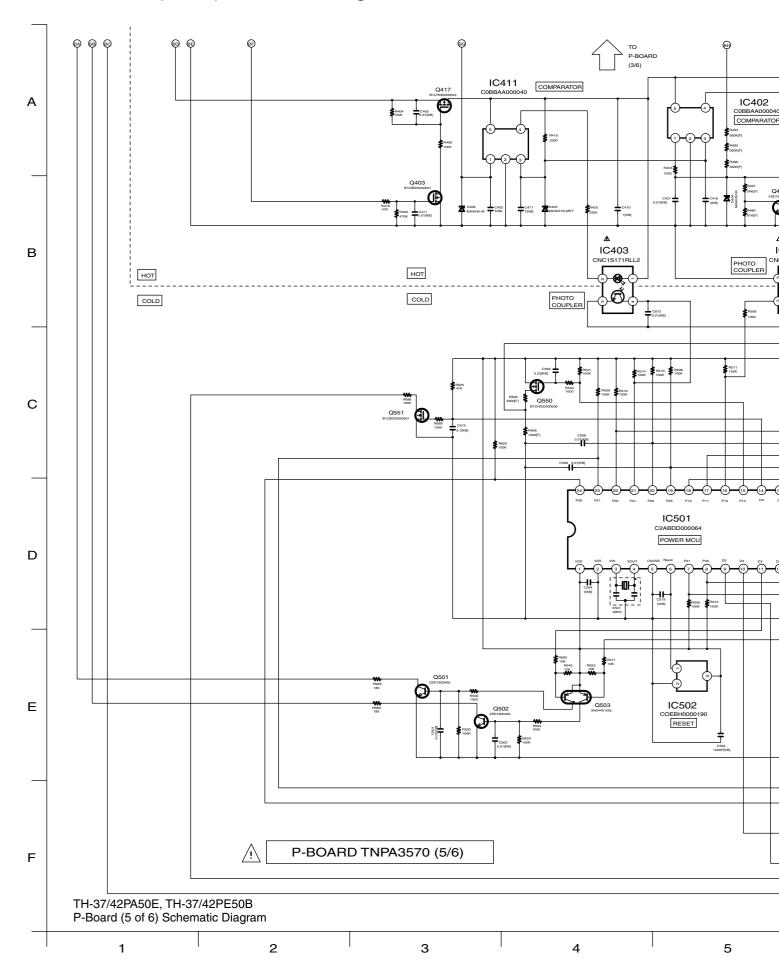

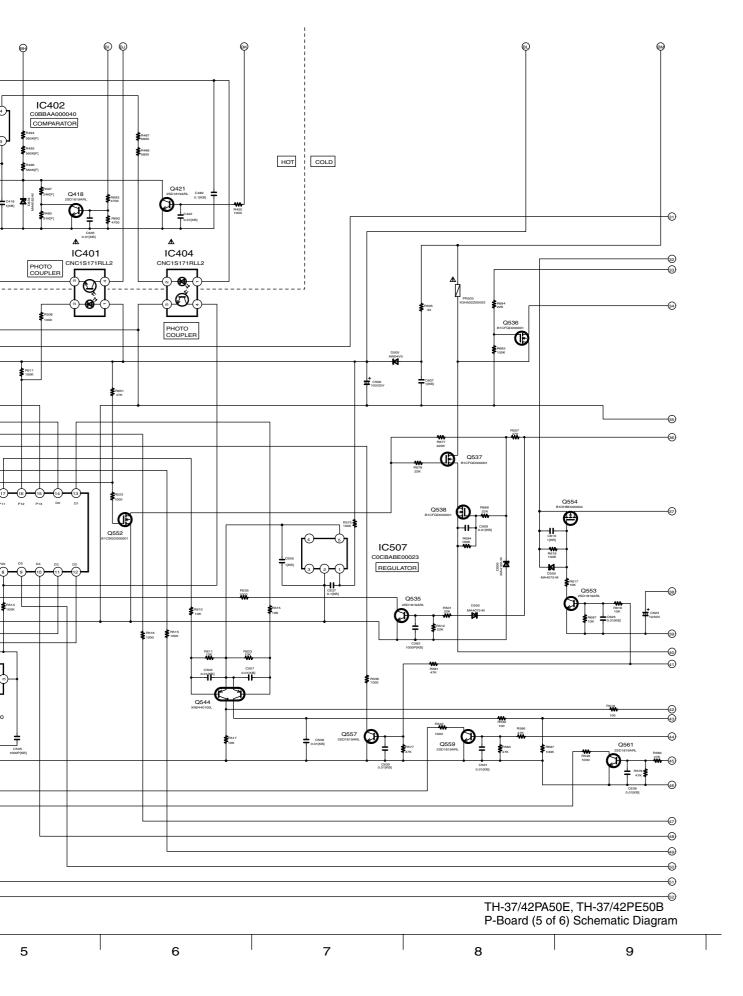

# 14.9. P-Board (6 of 6) Schematic Diagram

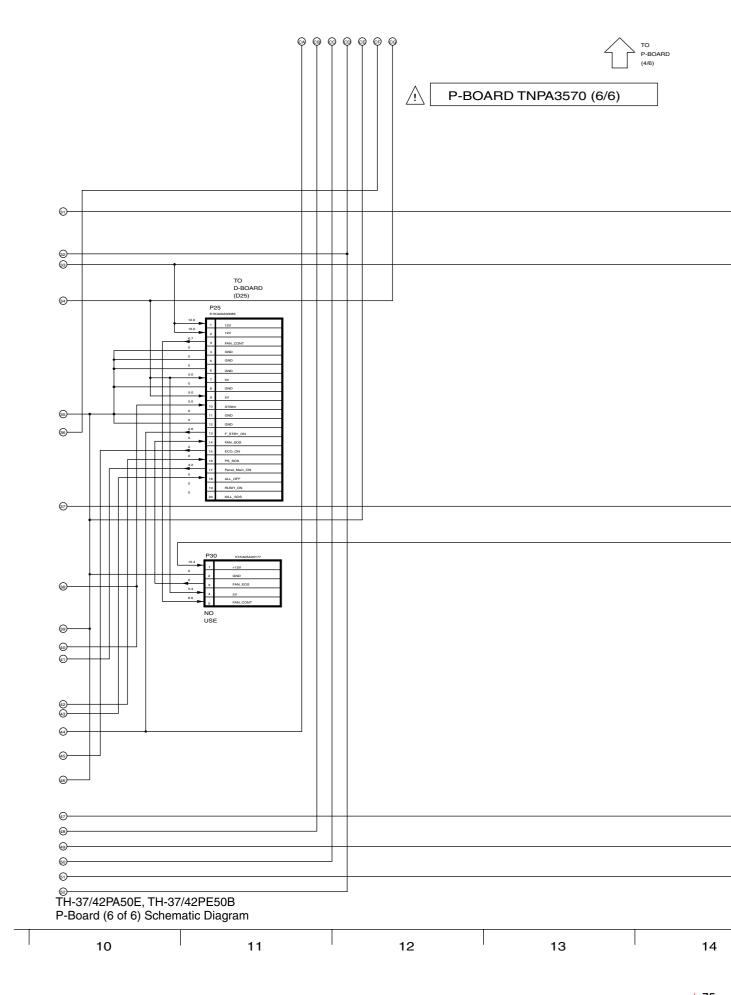


		ł		
_	_	÷	_	_
		т		
		1		

	Θ	ရ	9
ARD			
1			
			ı
		J	

TH-37/42PA50E, TH-37/42PE50B P-Board (6 of 6) Schematic Diagram


14 15 16 17 18

## 14.10. PA and PB-Board Block Diagram

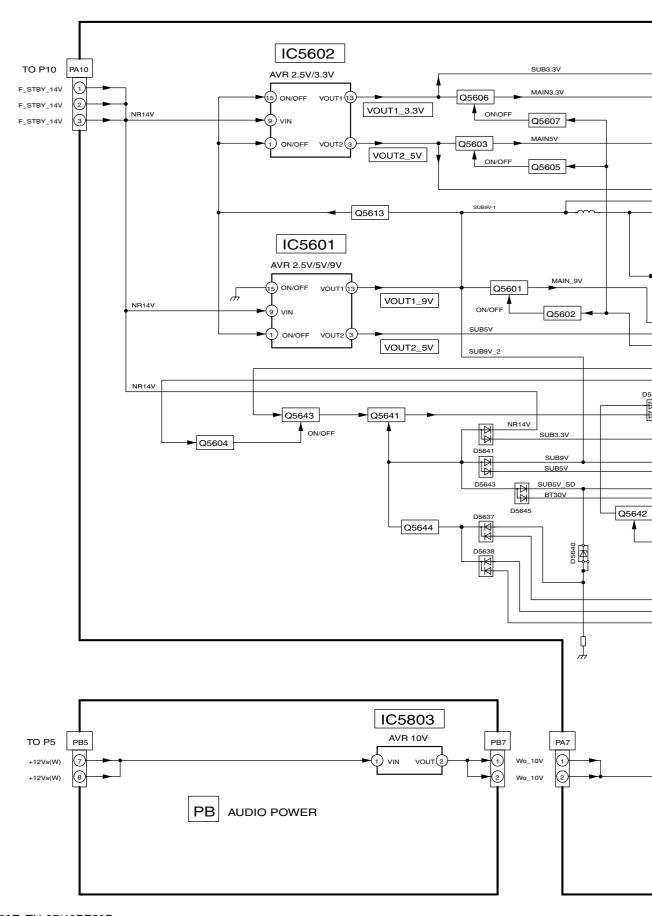


TH-37/42PA50E, TH-37/42PE50B PA and PB-Board Block Diagram




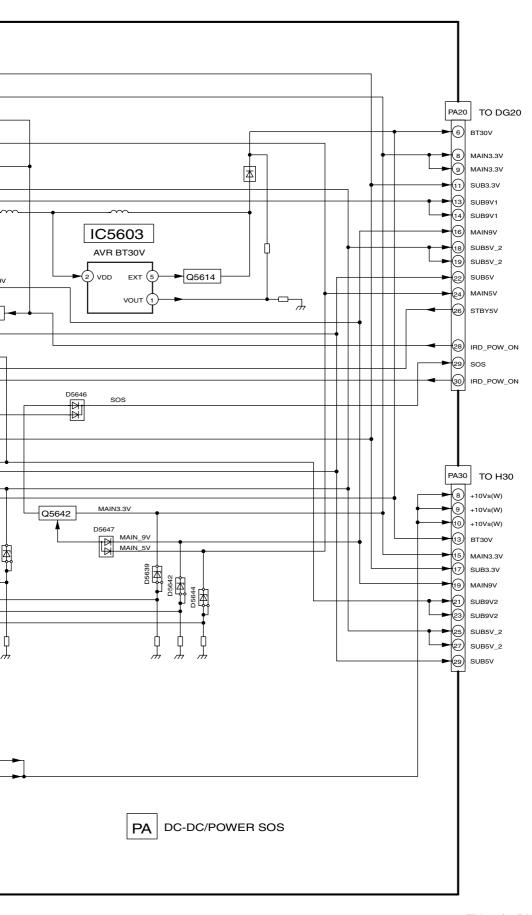


TH-37/42PA50E, TH-37/42PE50B PA and PB-Board Block Diagram

## 14.11. PA-Board Schematic Diagram

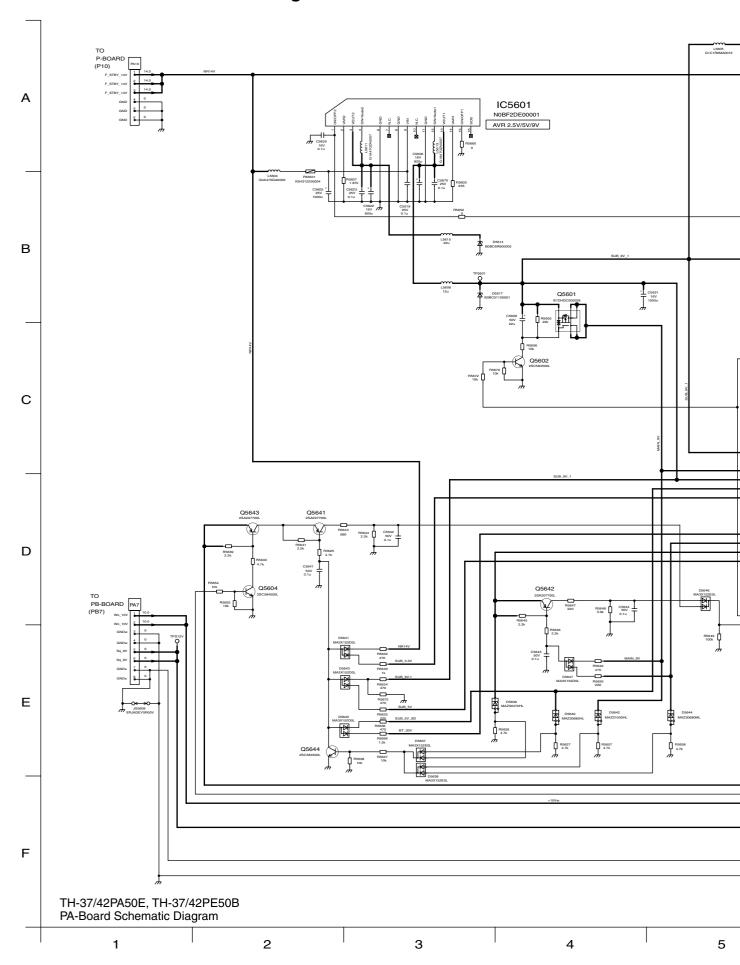

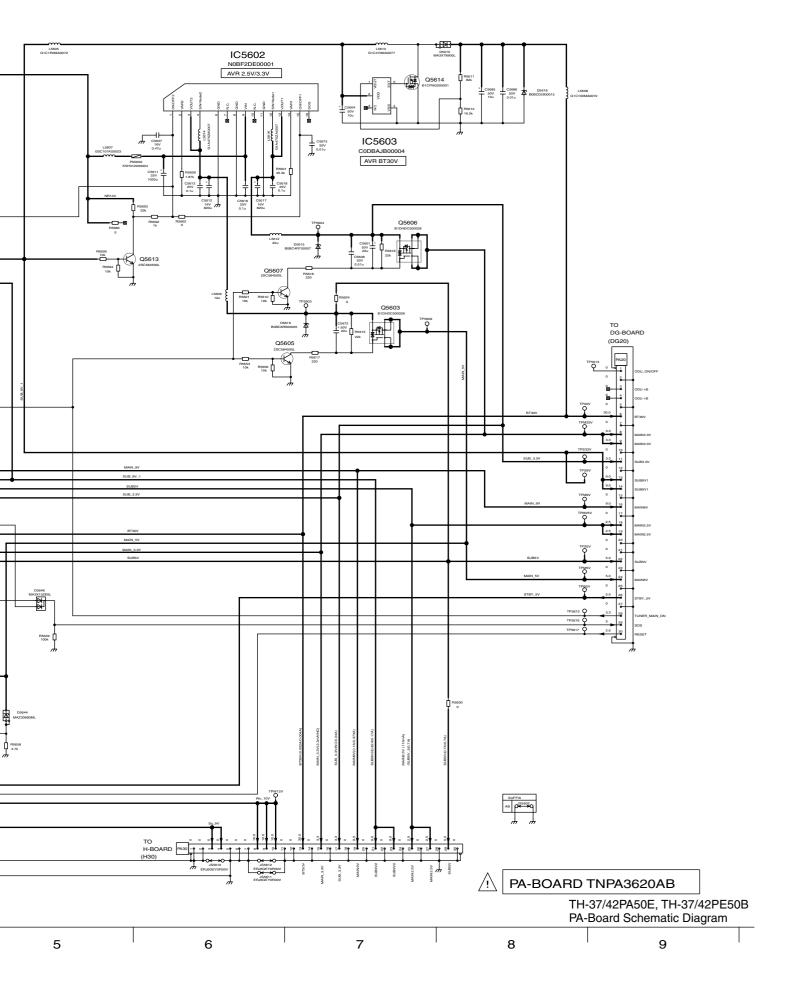

## 14.12. PB-Board Schematic Diagram

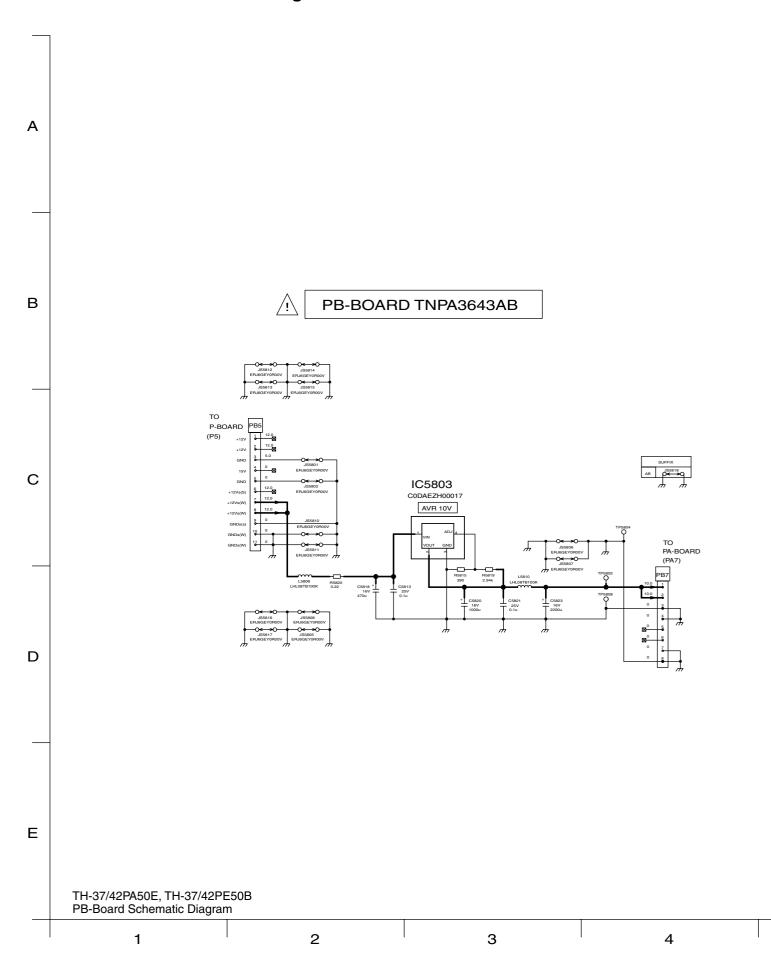


)


TH-37/42PA50E, TH-37/42PE50B PB-Board Schematic Diagram

5 6 7 8

### 14.13. H and TA-Board Block Diagram

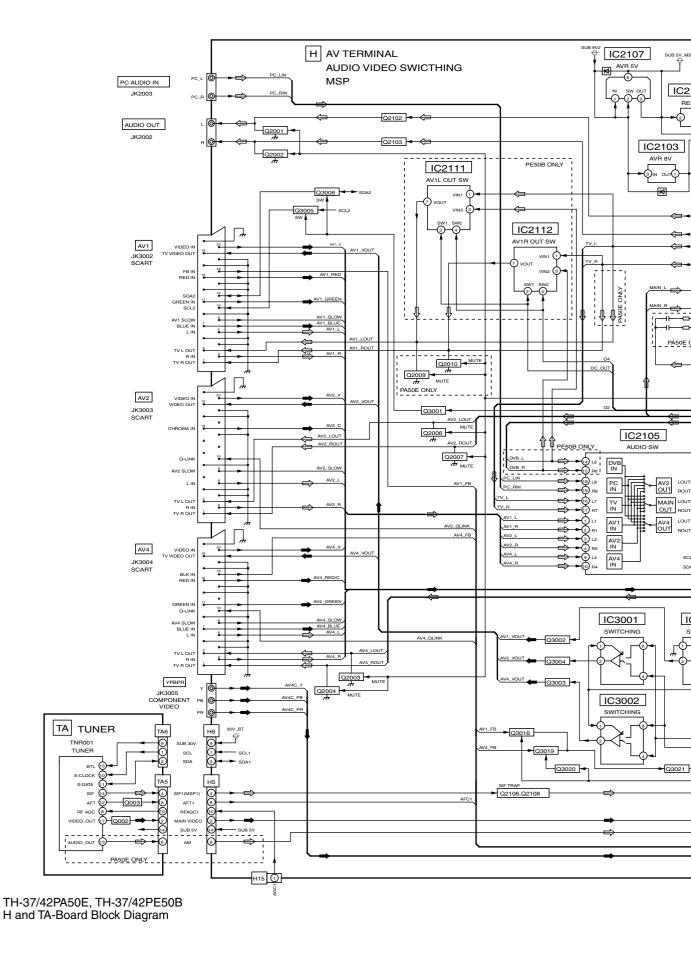




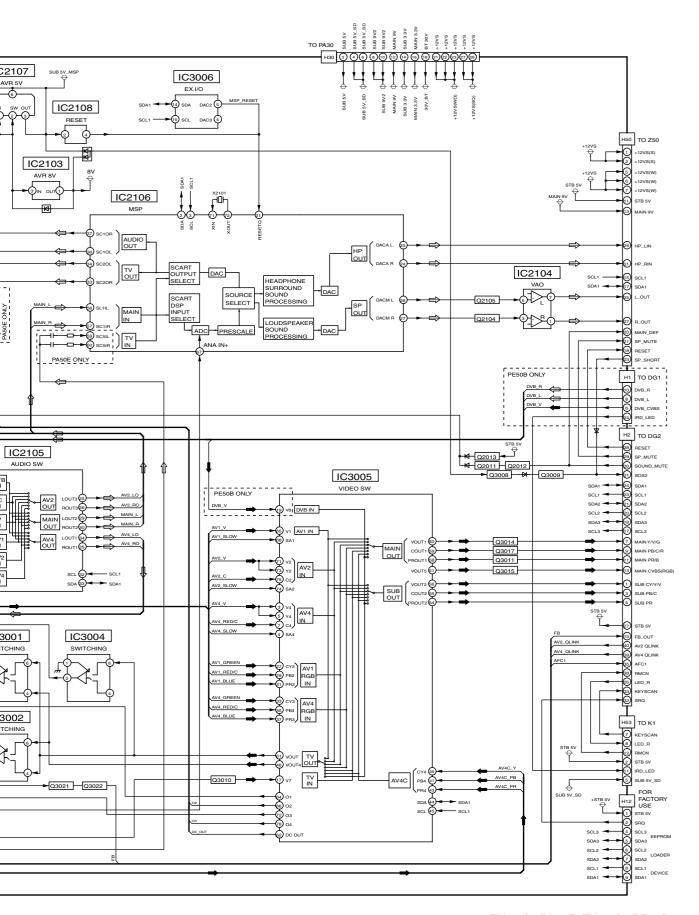


TH-37/42PA50E, TH-37/42PE50B H and TA-Board Block Diagram


## 14.14. K, S and Z-Board Block Diagram

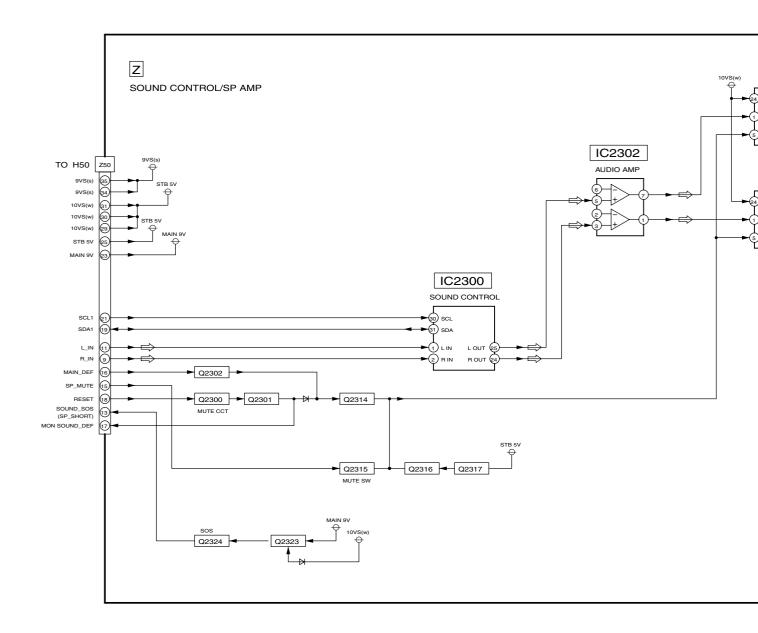




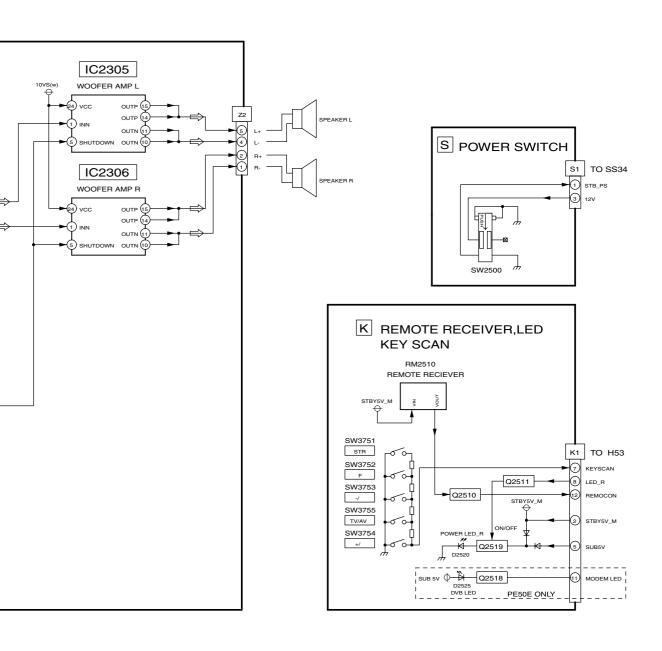


## 14.15. H Board (1 of 2) Schematic Diagram

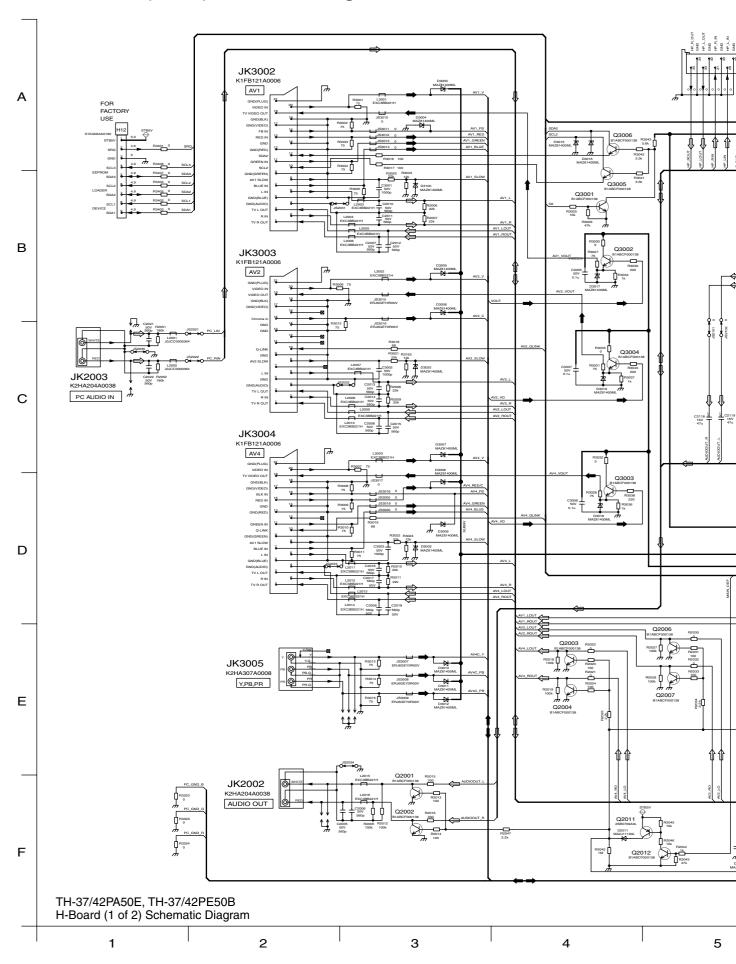




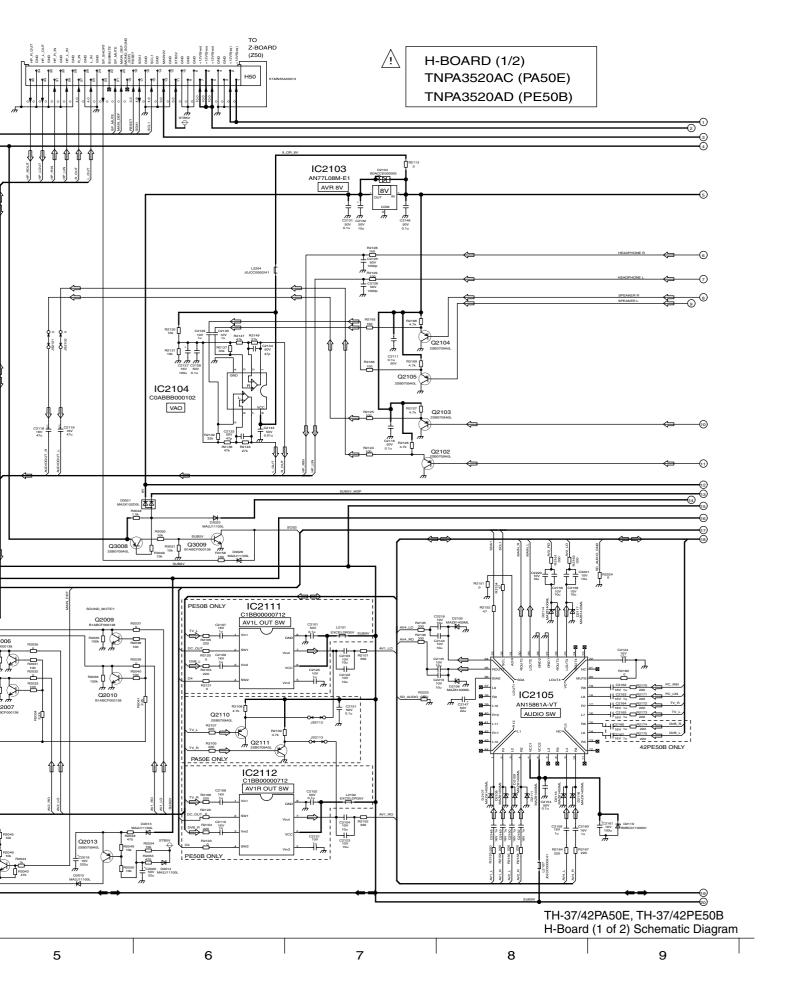


## 14.16. H-Board (2 of 2) Schematic Diagram

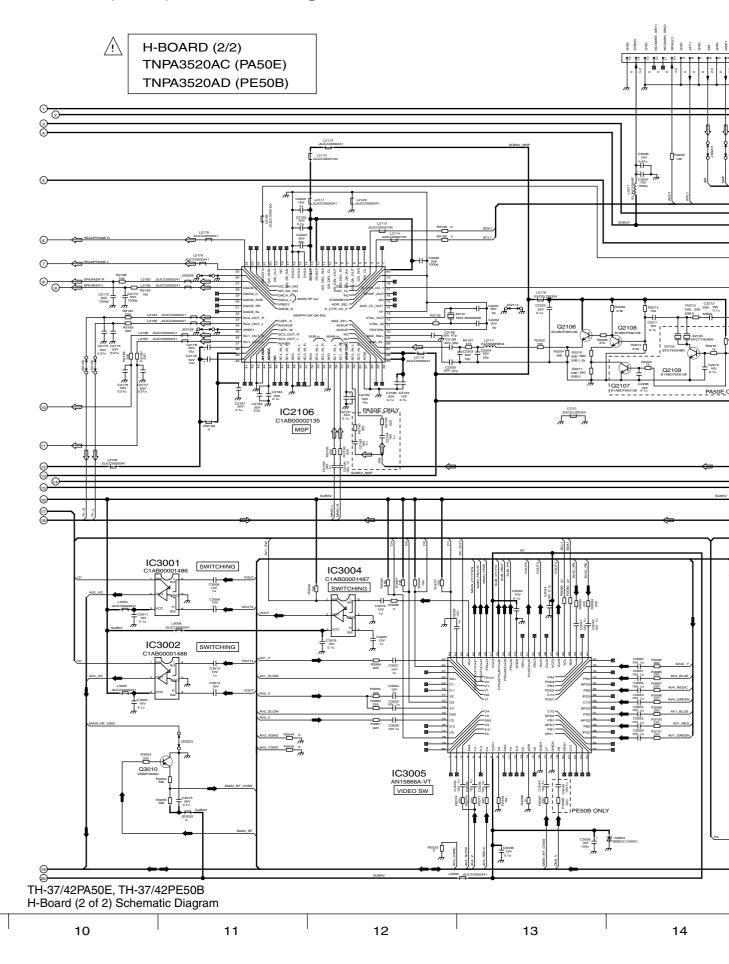


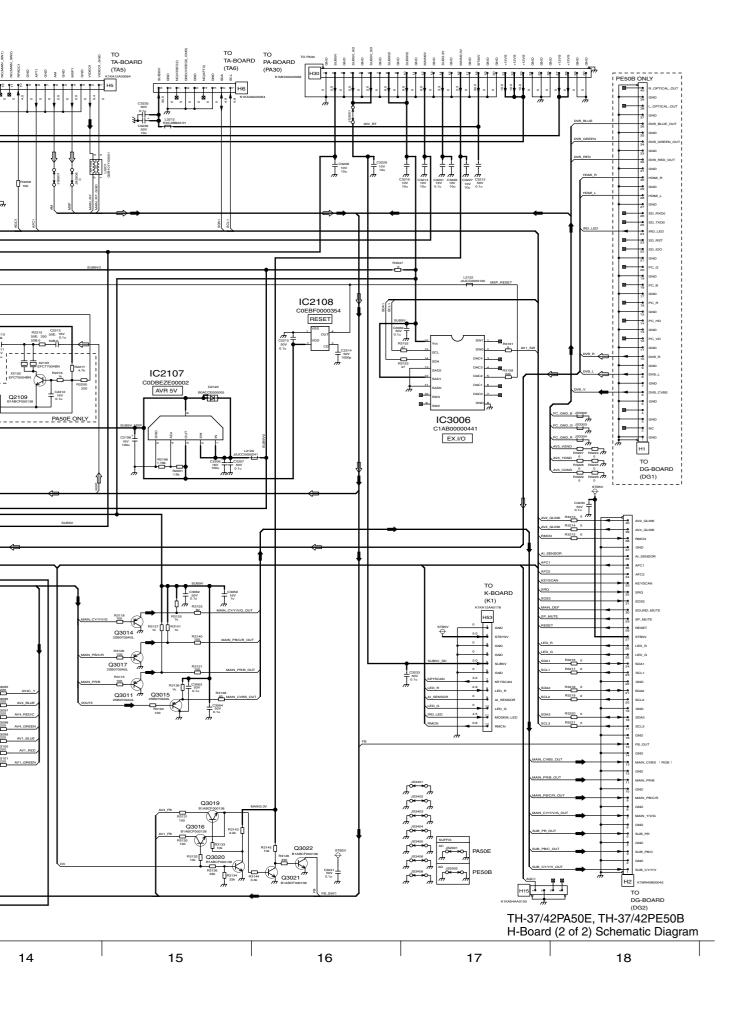


## 14.17. K, S and TA-Board Schematic Diagram

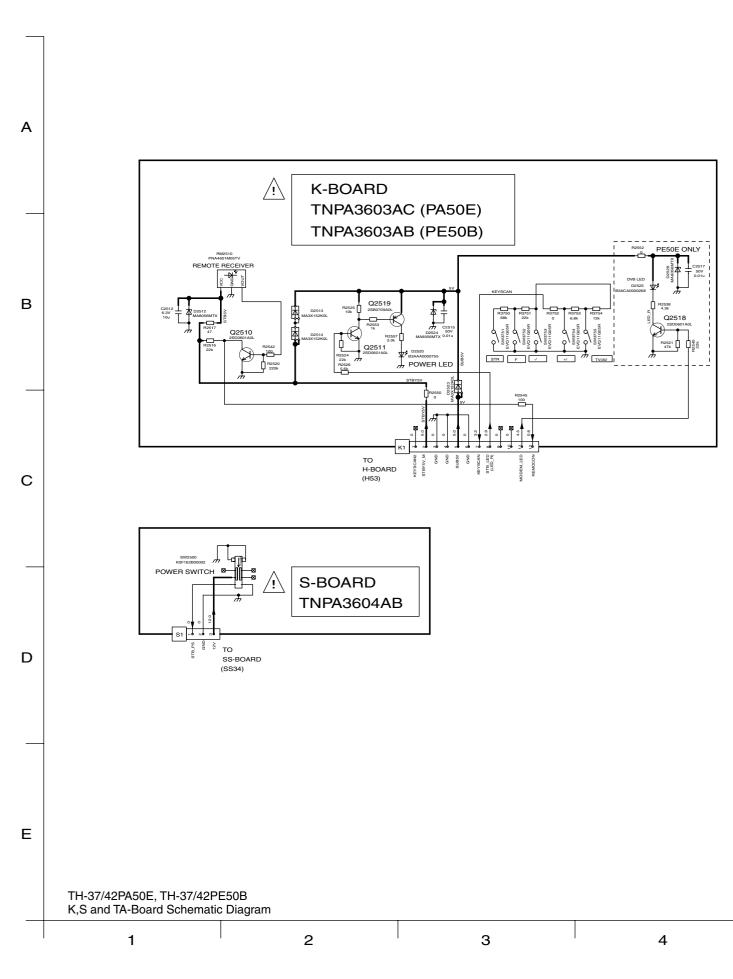






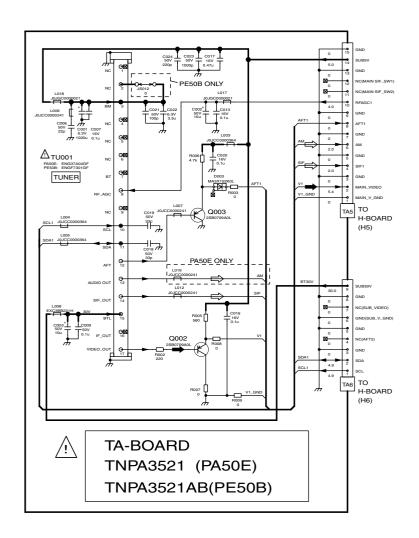


TH-37/42PA50E, TH-37/42PE50B K,S and TA-Board Schematic Diagram

4 5 6 7 8


## 14.18. Z-Board Schematic Diagram

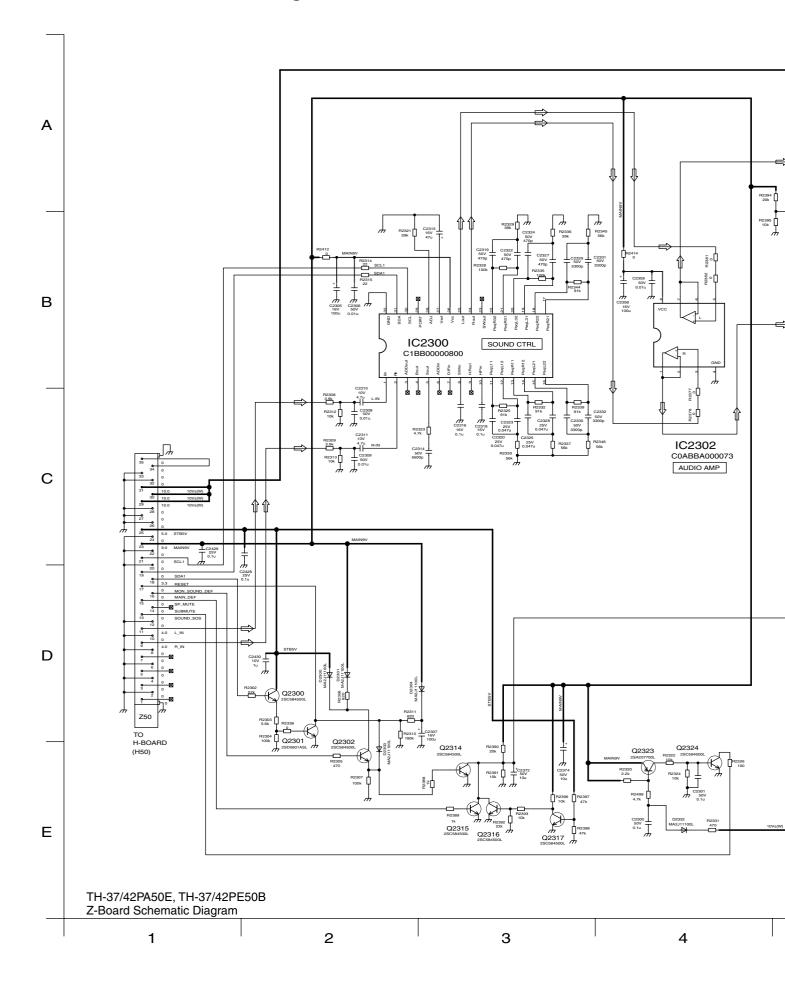



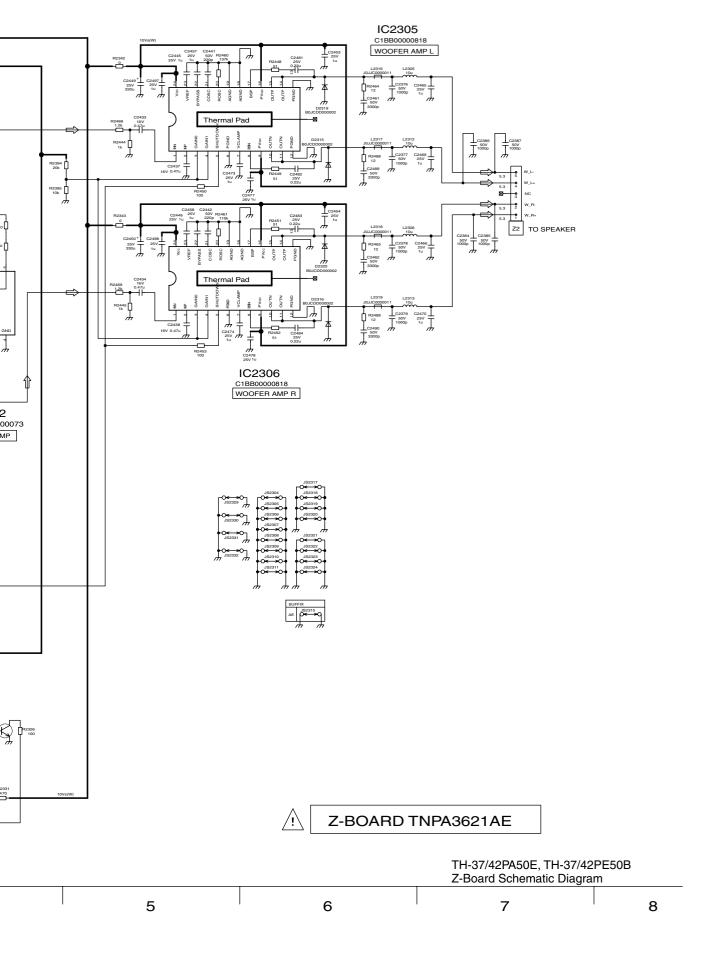


#### 14.19. XV-Board Block Diagram (PE50B)

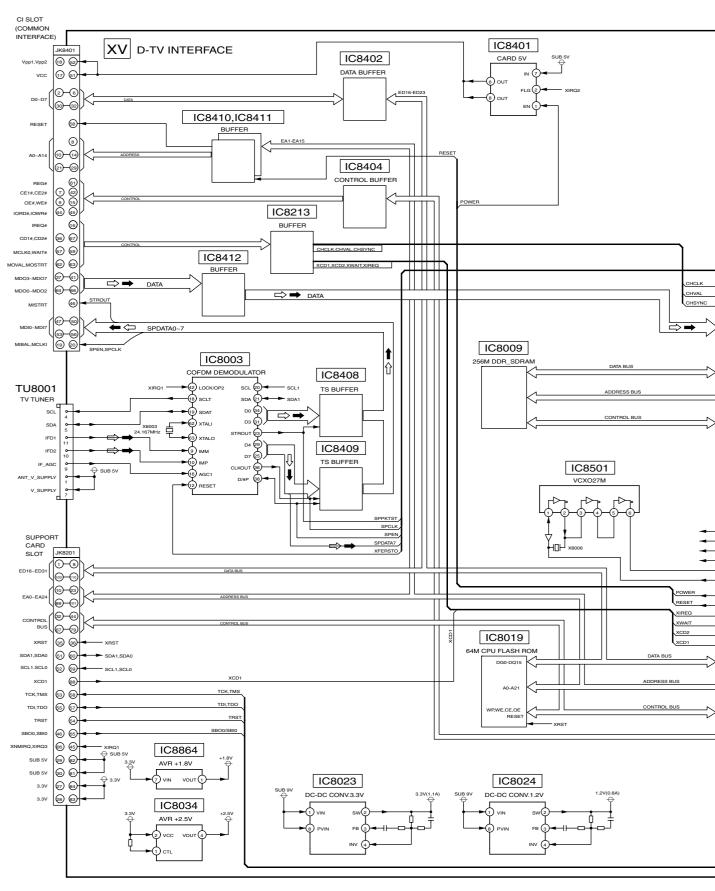


TH-37/42PE50B XV-Board Block Diagram




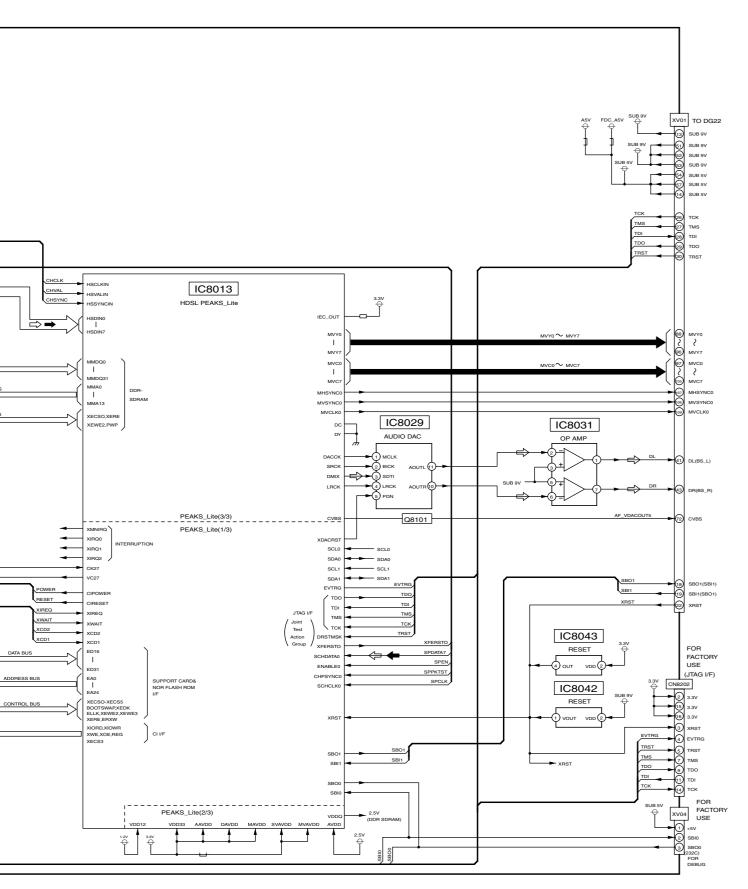


TH-37/42PE50B XV-Board Block Diagram

## 14.20. XV-Board (1 of 5) Schematic Diagram (PE50B)

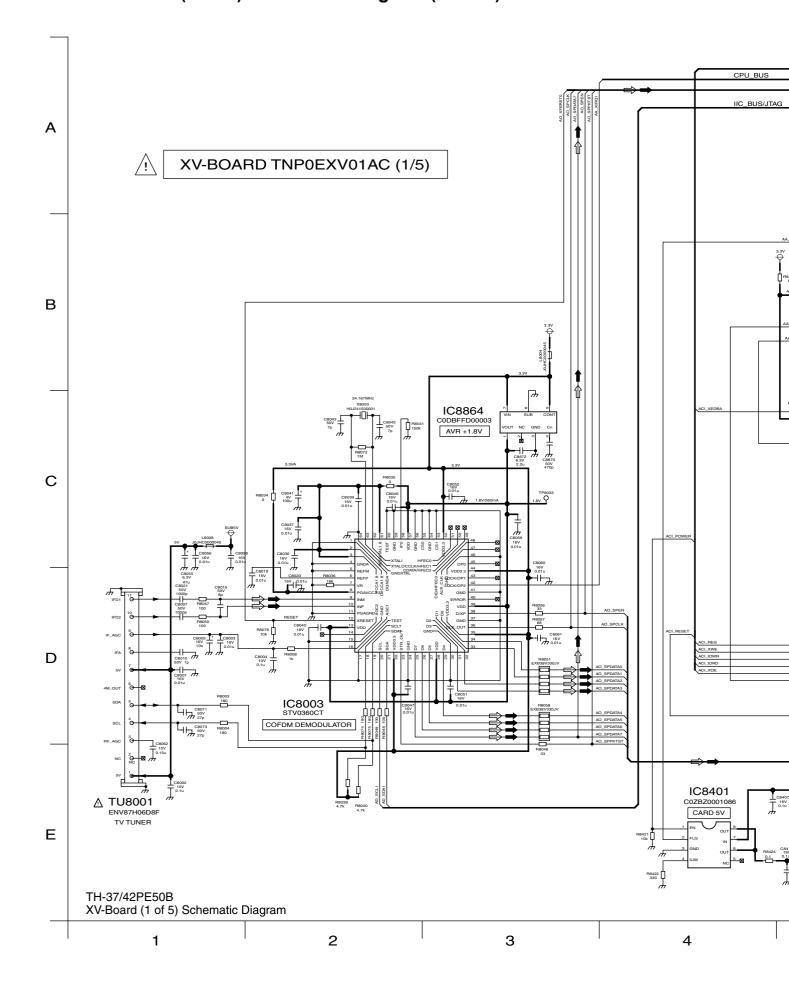


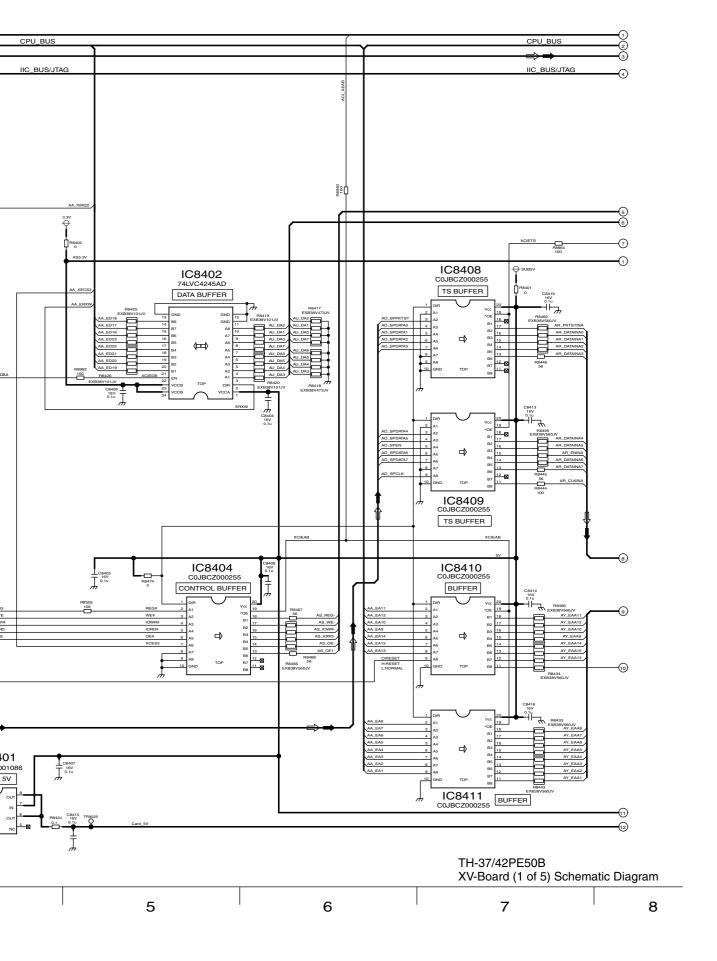


## 14.21. XV-Board (2 of 5) Schematic Diagram (PE50B)

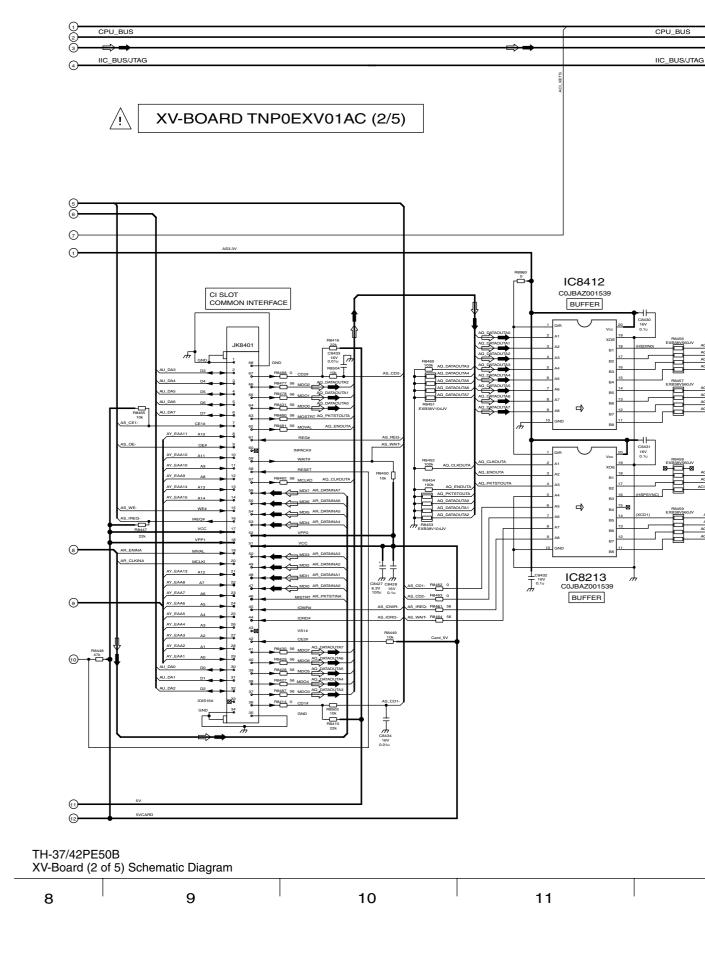




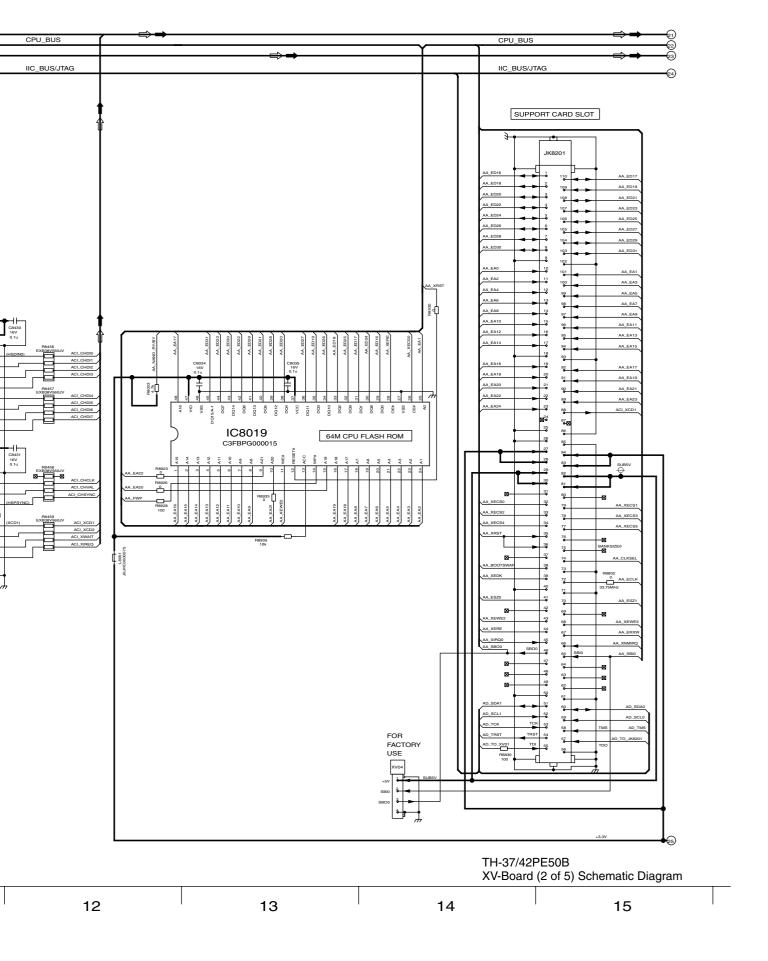


## 14.22. XV-Board (3 of 5) Schematic Diagram (PE50B)

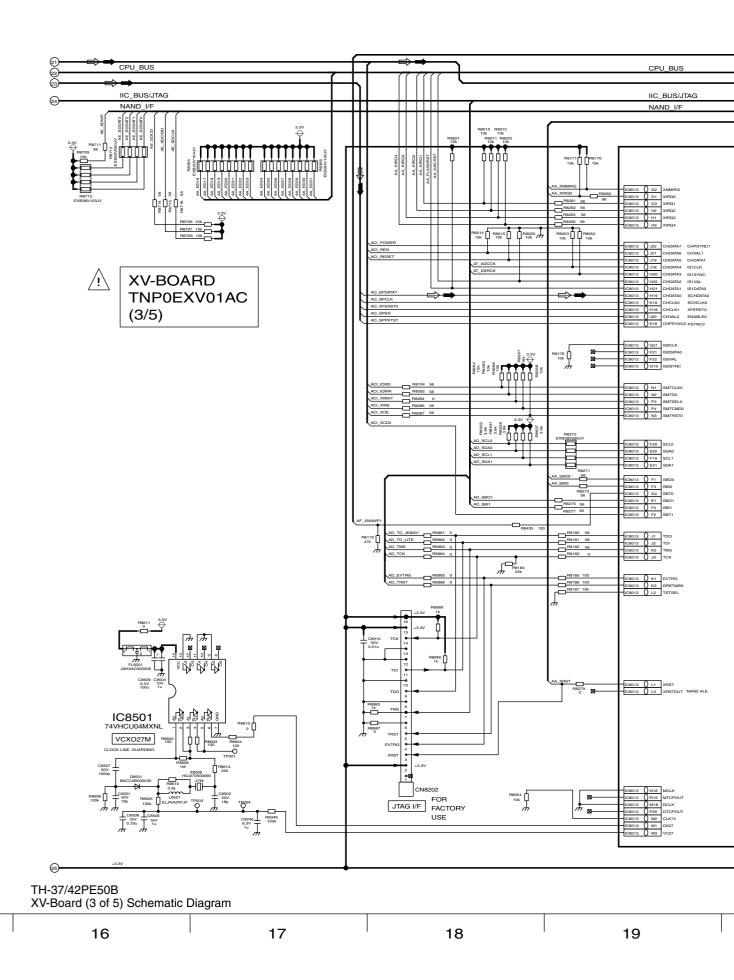


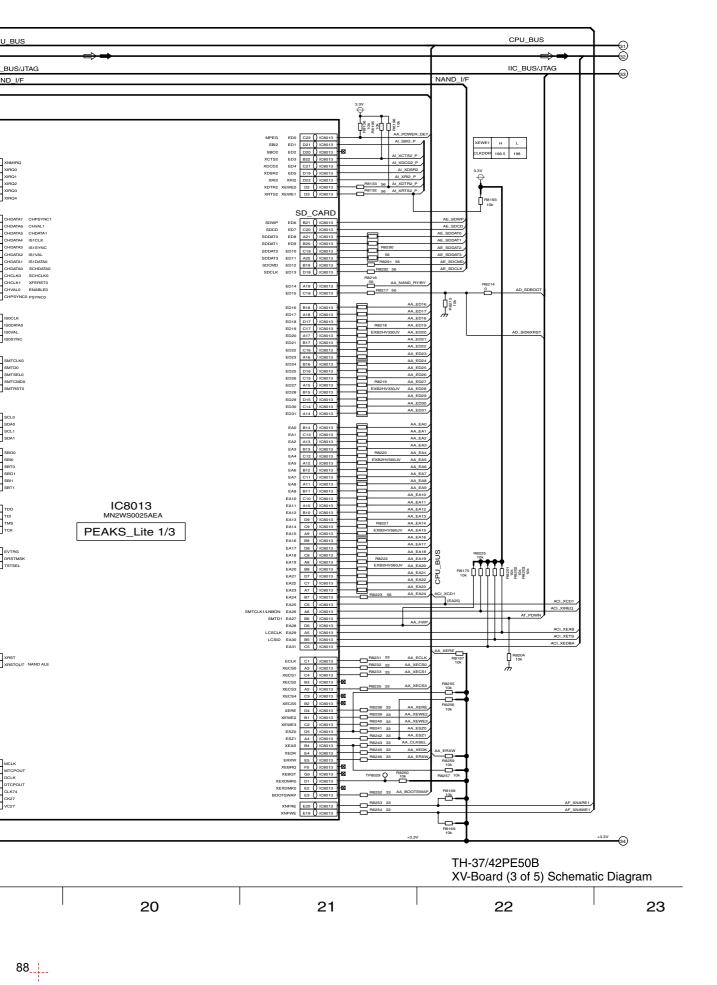


## 14.23. XV-Board (4 of 5) Schematic Diagram (PE50B)

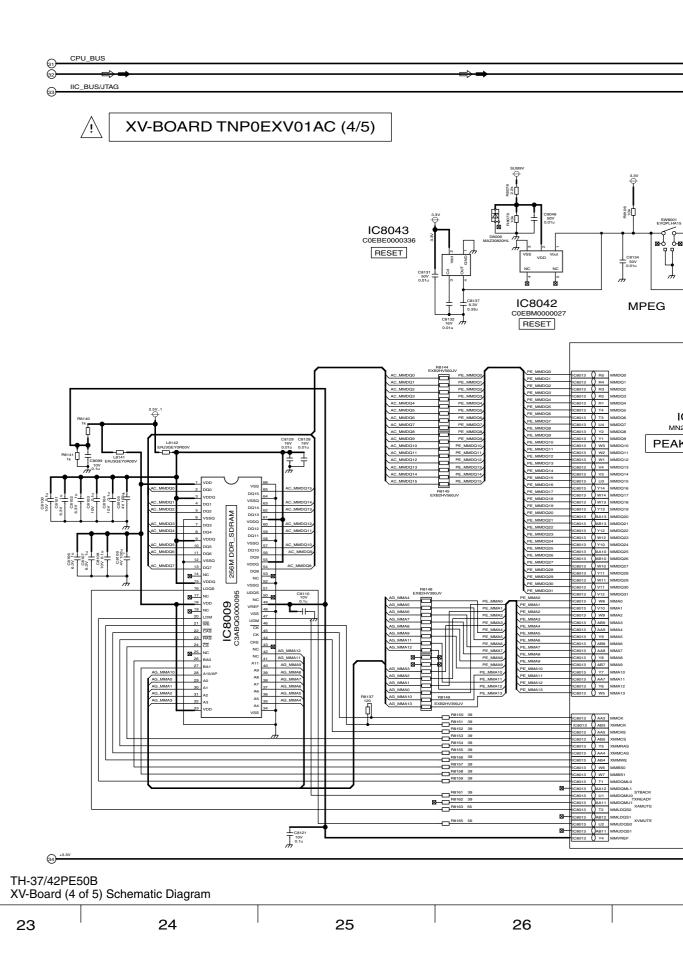



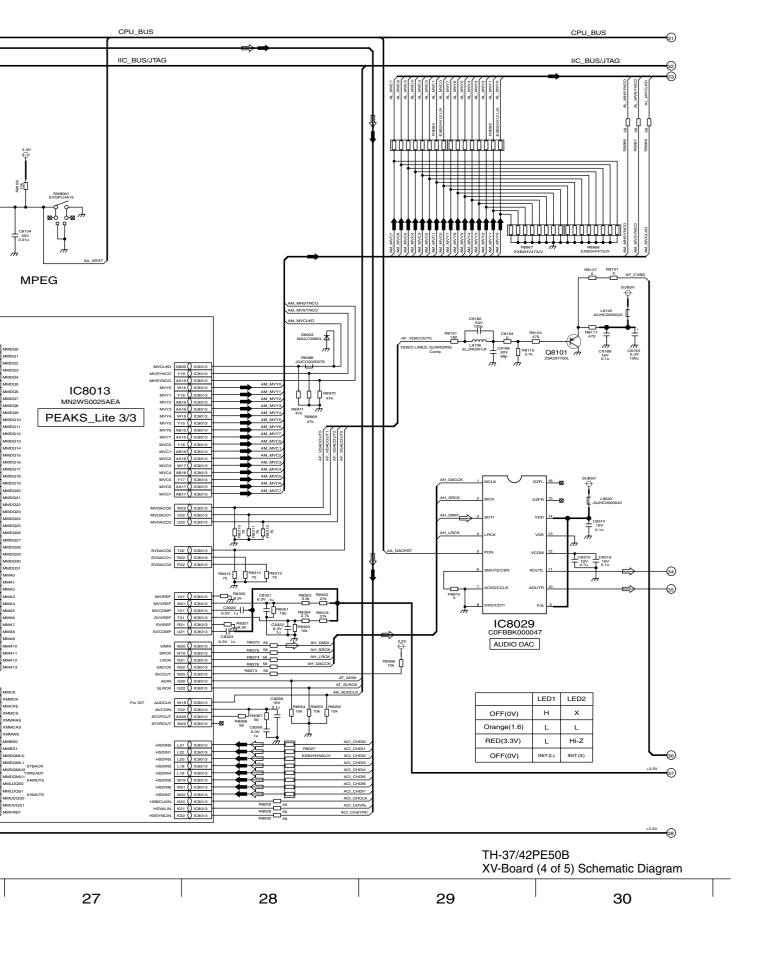



# 14.24. XV-Board (5 of 5) Schematic Diagram (PE50B)

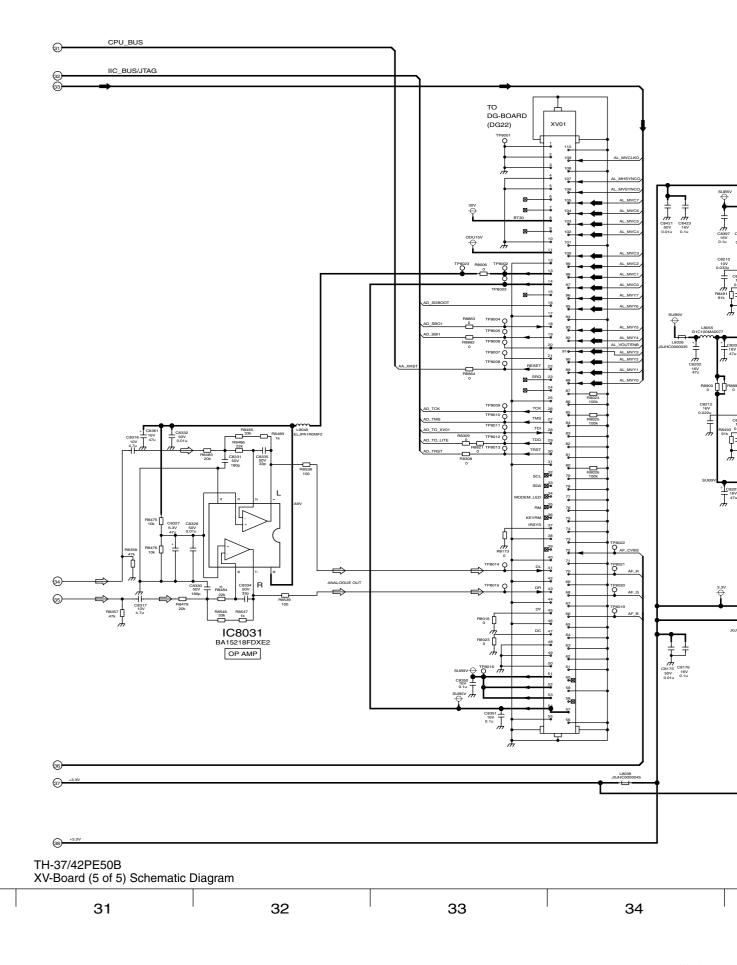

## <u>/i</u>\


#### XV-BOARD TNP0EXV01AC (5/5)

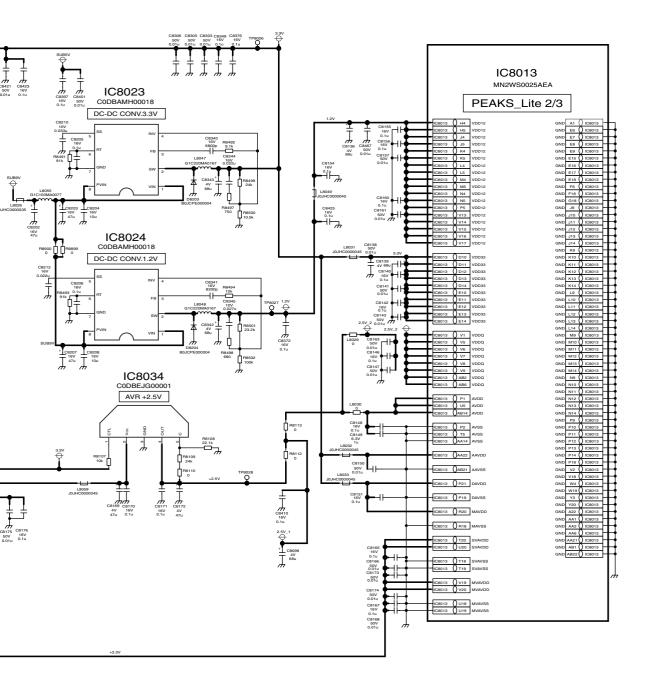




#### ----

#### 14.25. DG-Board (1 of 2) Block Diagram

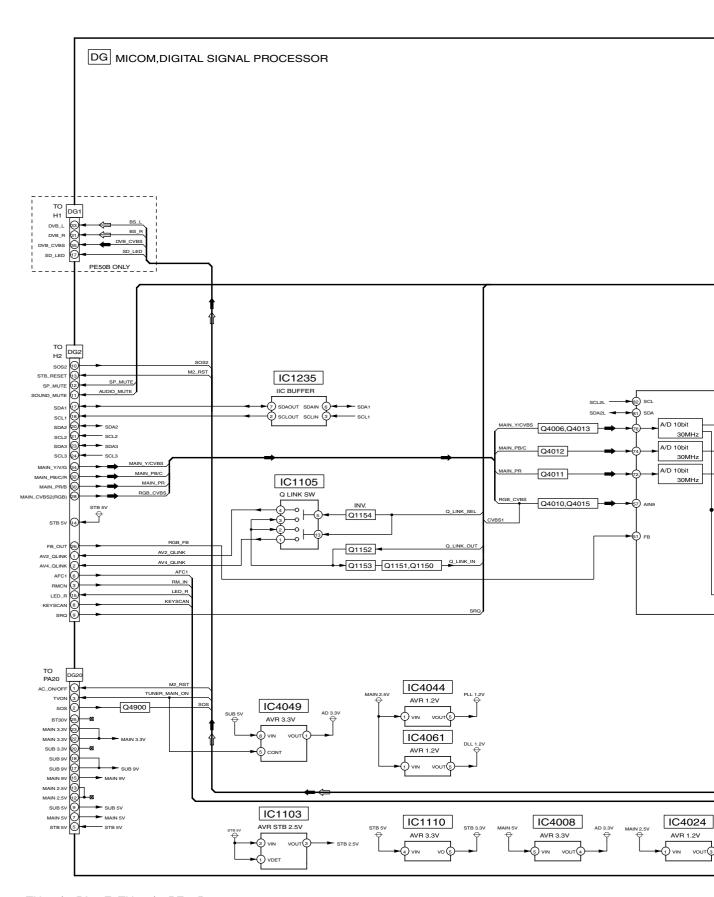

TH-37/42PA50E, TH-37/42PE50B DG-Board (1 of 2) Block Diagram




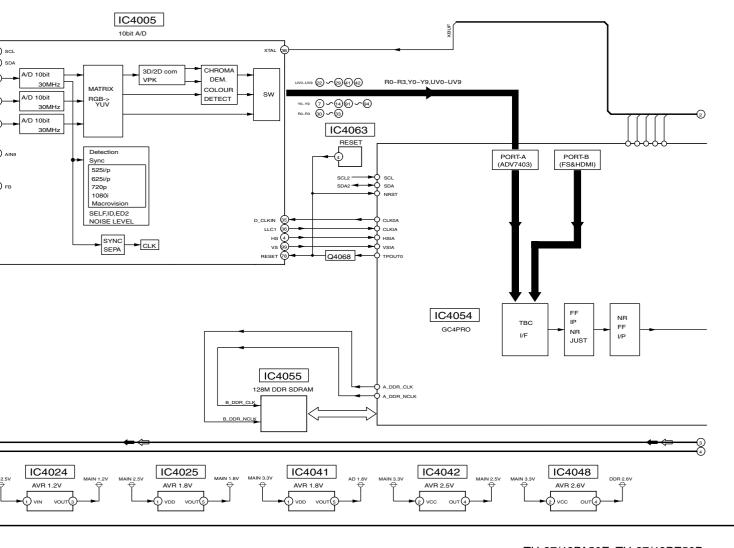


TH-37/42PA50E, TH-37/42PE50B DG-Board (1 of 2) Block Diagram

0

## 14.26. DG-Board (2 of 2) Block Diagram

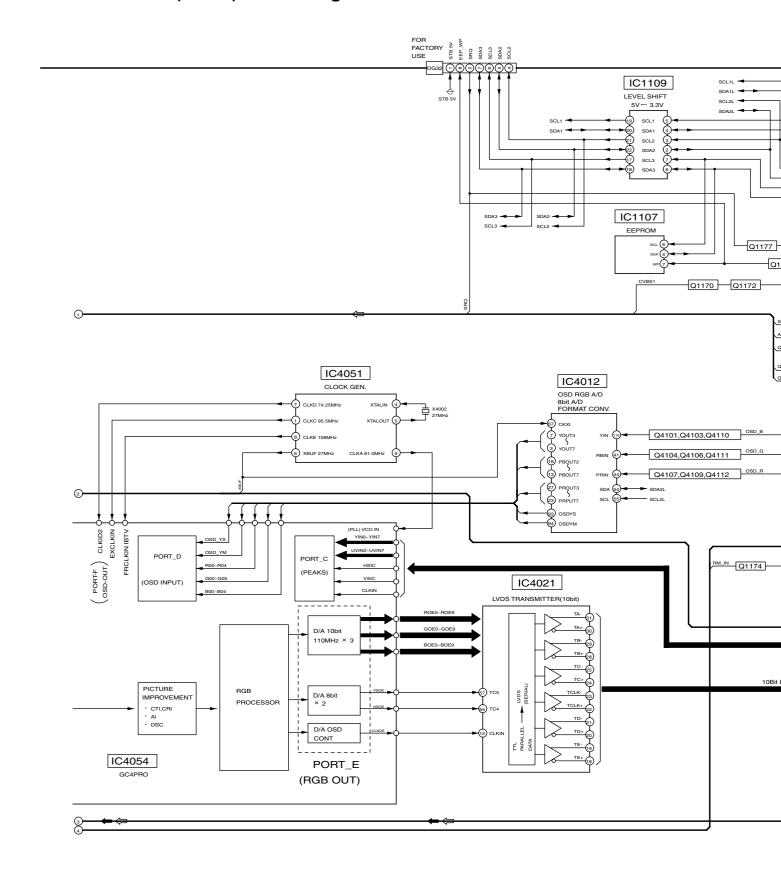





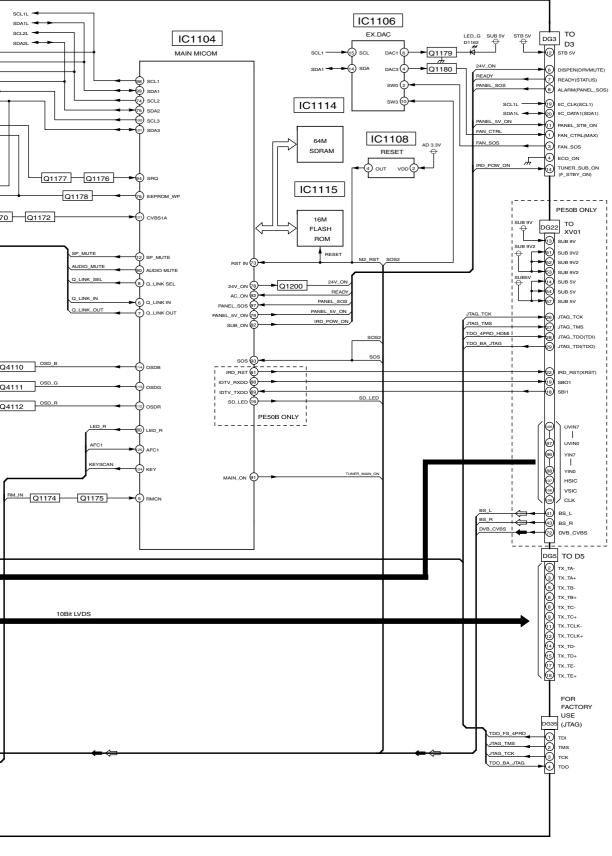


TH-37/42PA50E, TH-37/42PE50B DG-Board (2 of 2) Block Diagram

## 14.27. DG-Board (1 of 11) Schematic Diagram

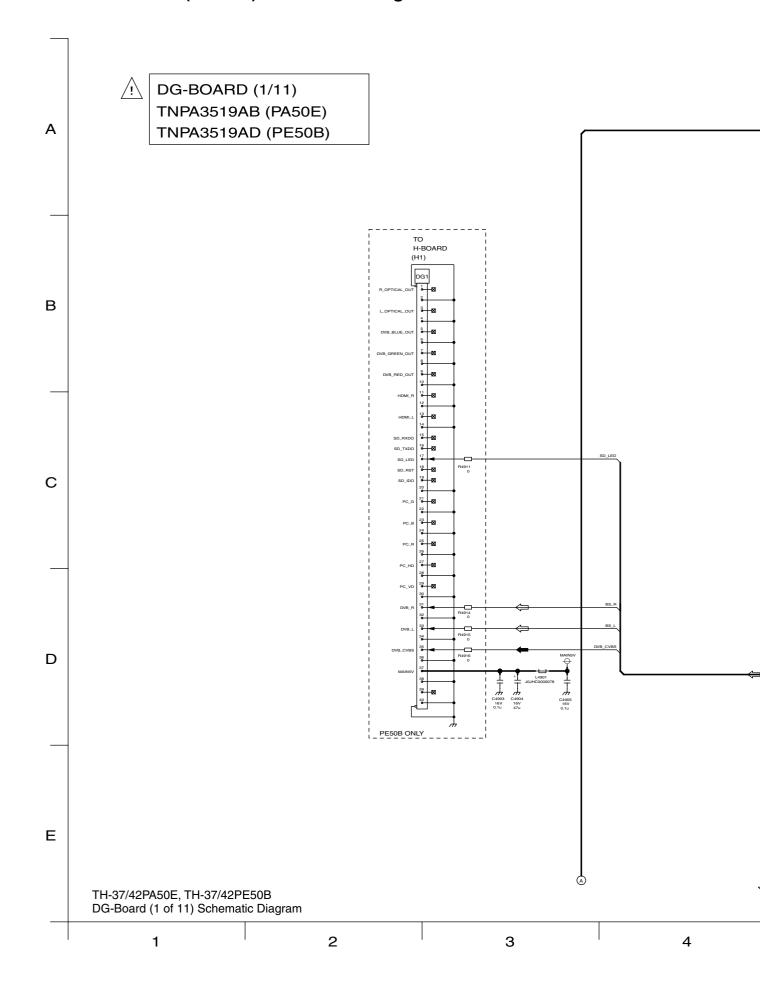


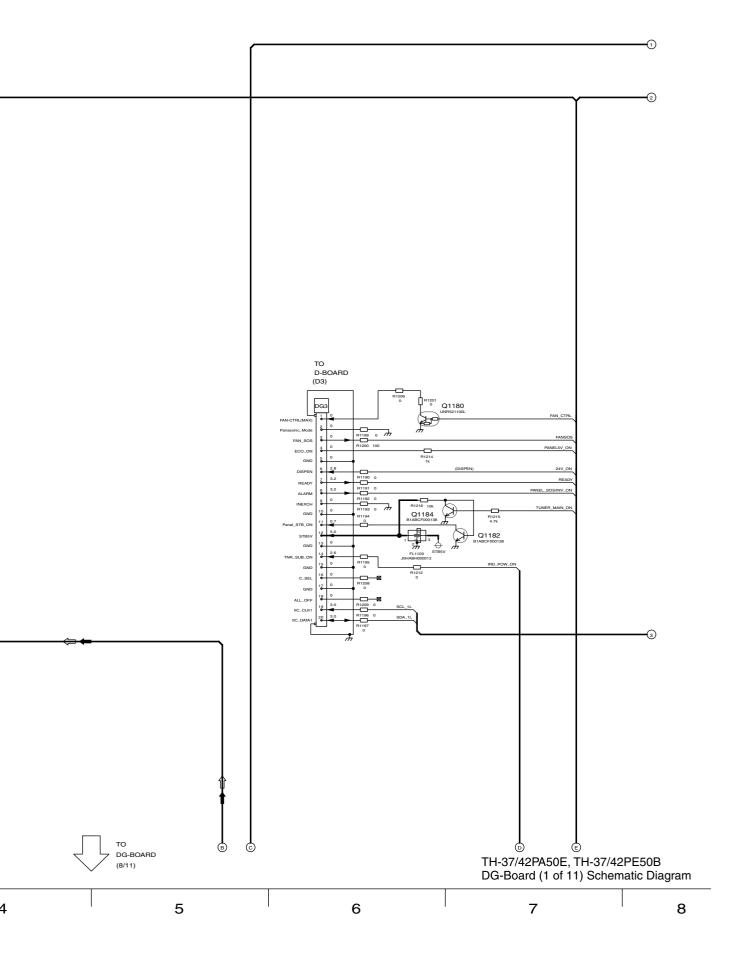


## 14.28. DG-Board (2 of 11) Schematic Diagram

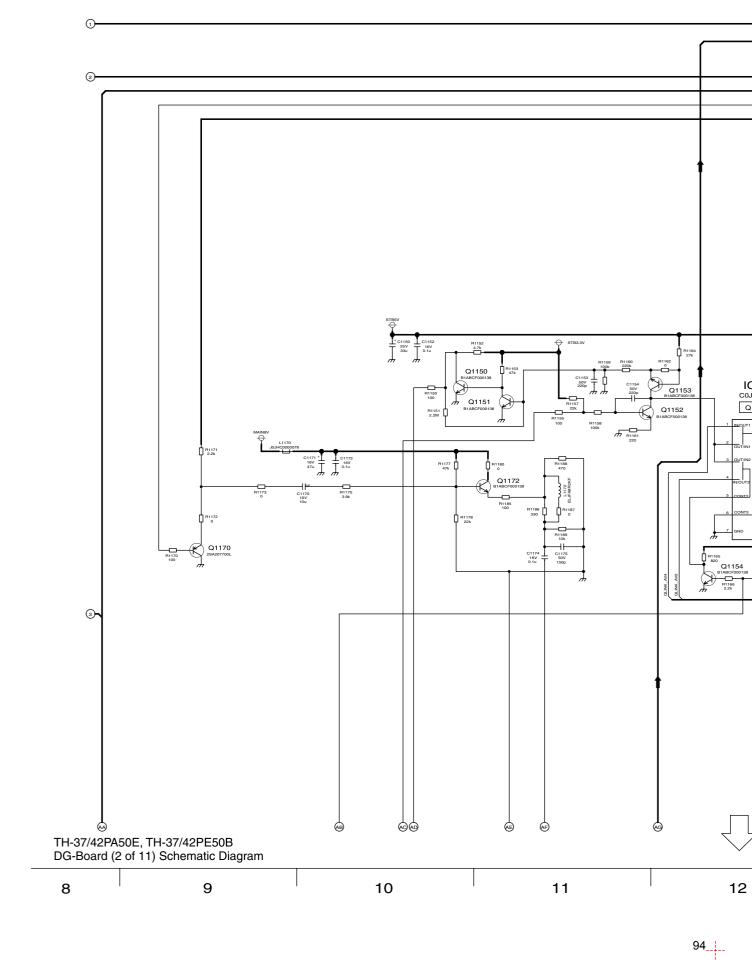




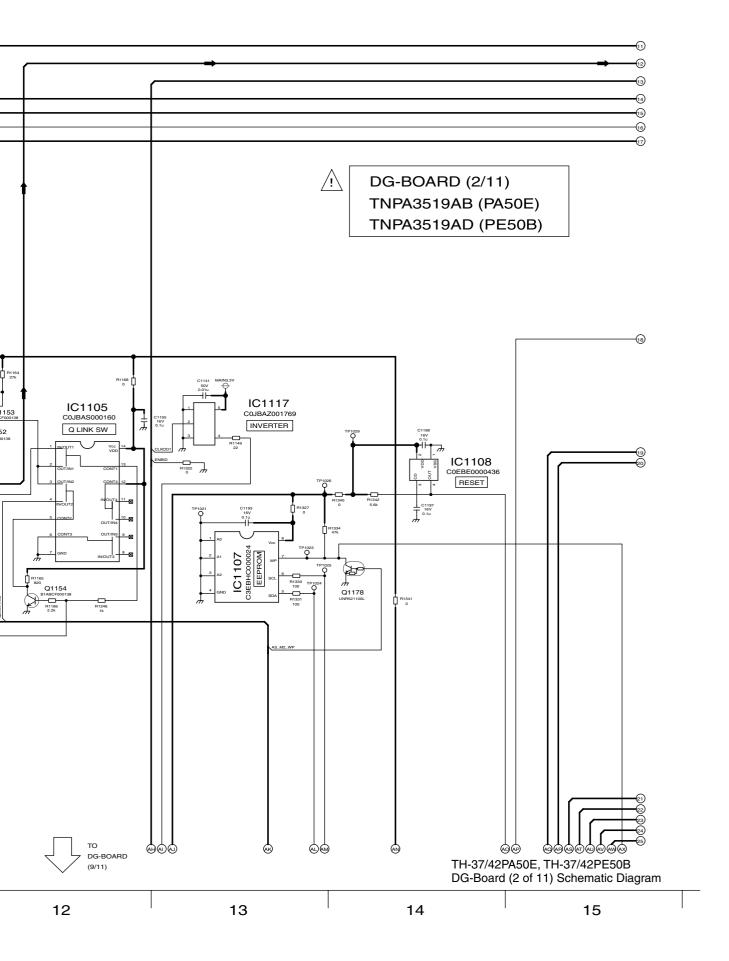


## 14.29. DG-Board (3 of 11) Schematic Diagram

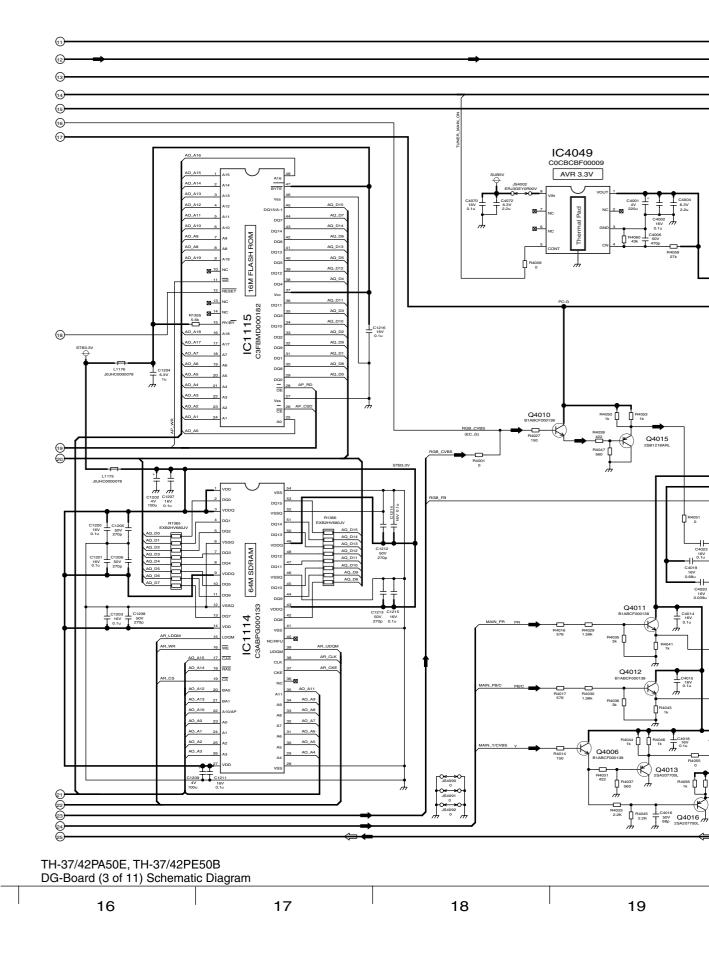




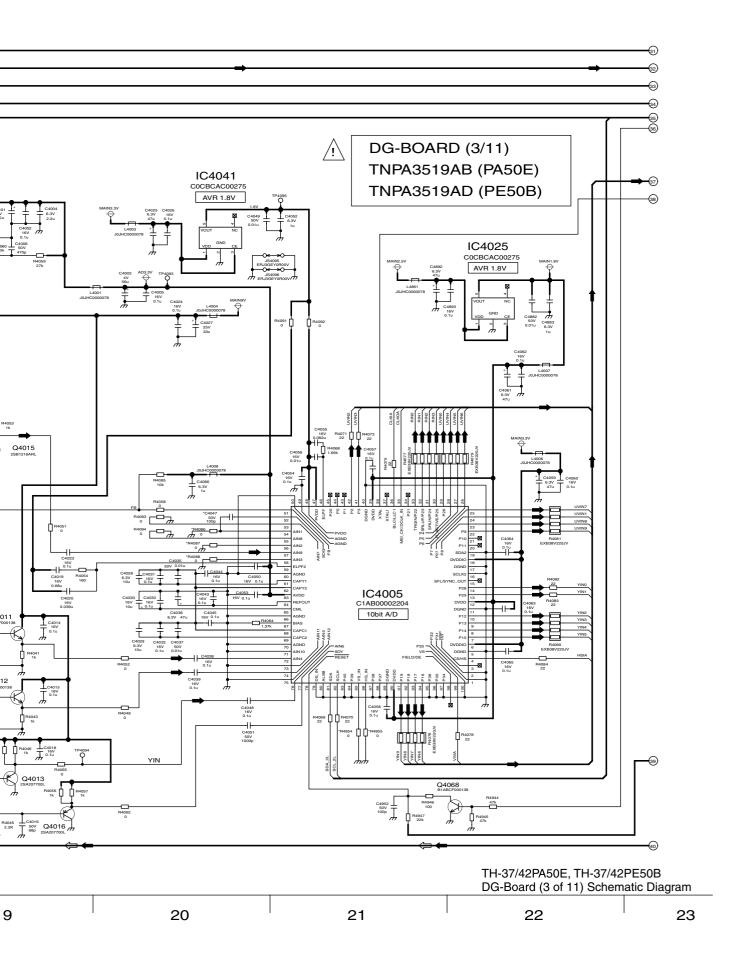


## 14.30. DG-Board (4 of 11) Schematic Diagram

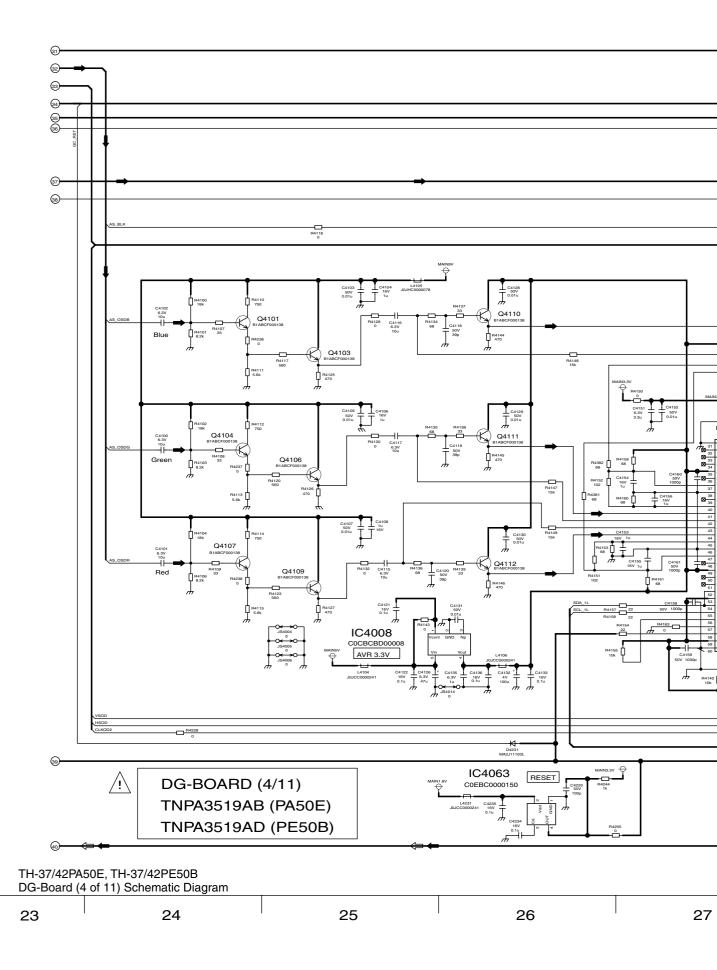

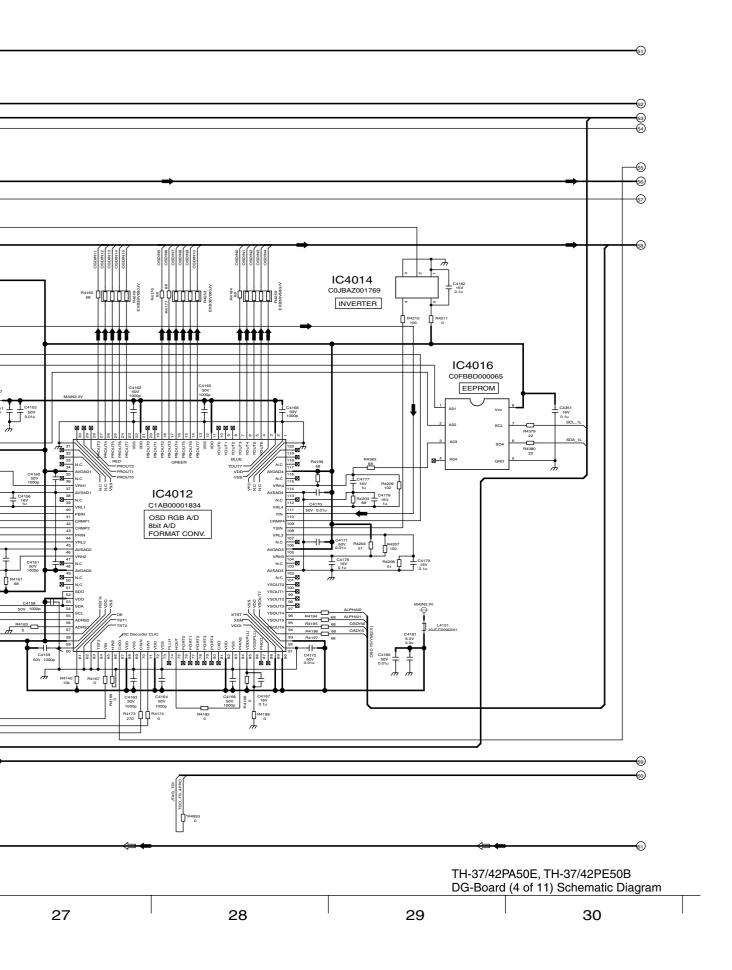

#### 14.31. DG-Board (5 of 11) Schematic Diagram

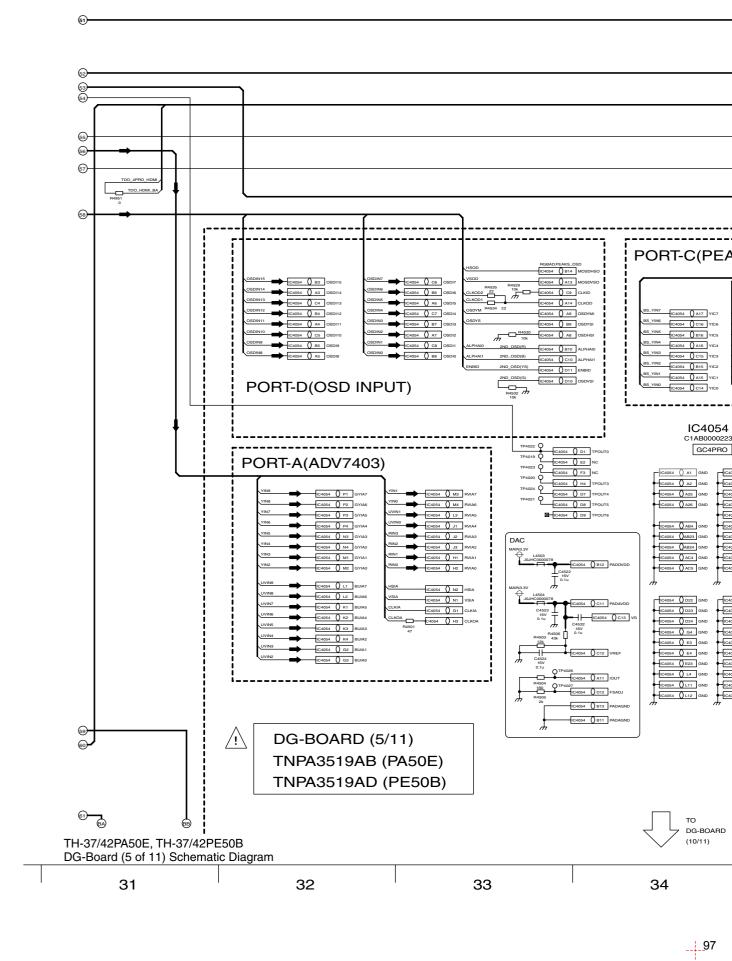


36

37


38

35


## 14.32. DG-Board (6 of 11) Schematic Diagram

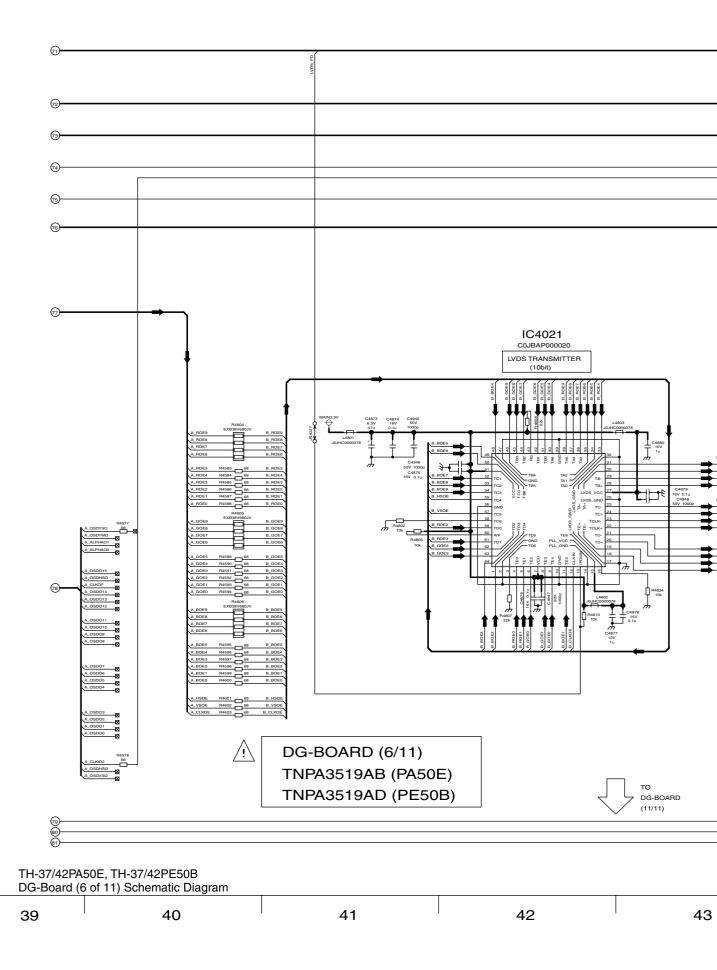




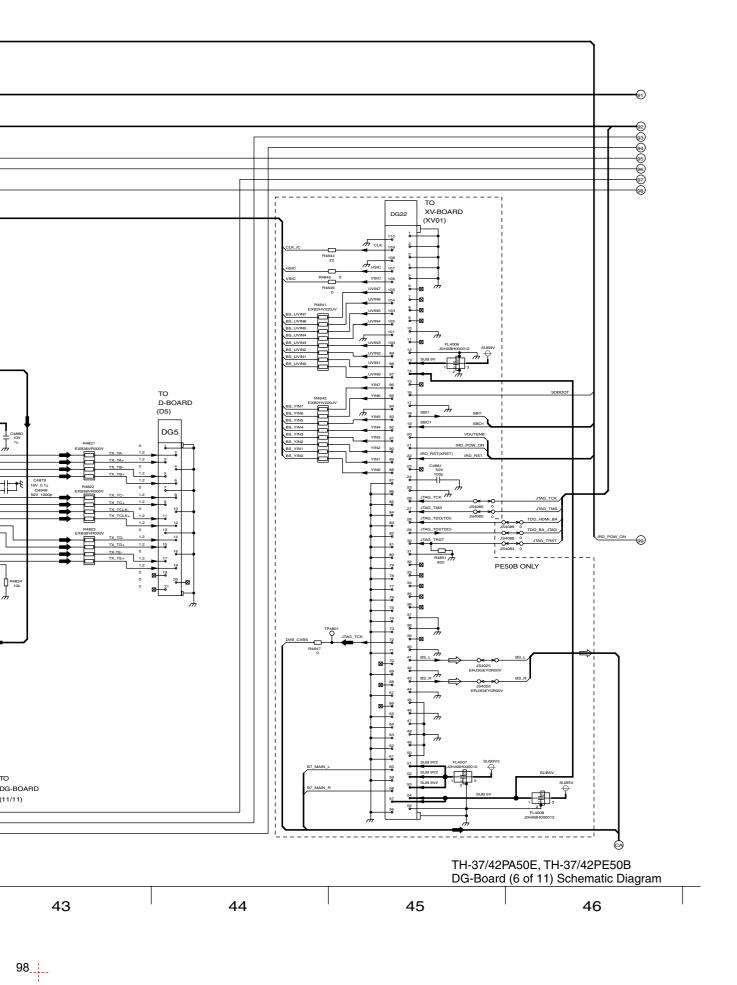

## 14.33. DG-Board (7 of 11) Schematic Diagram

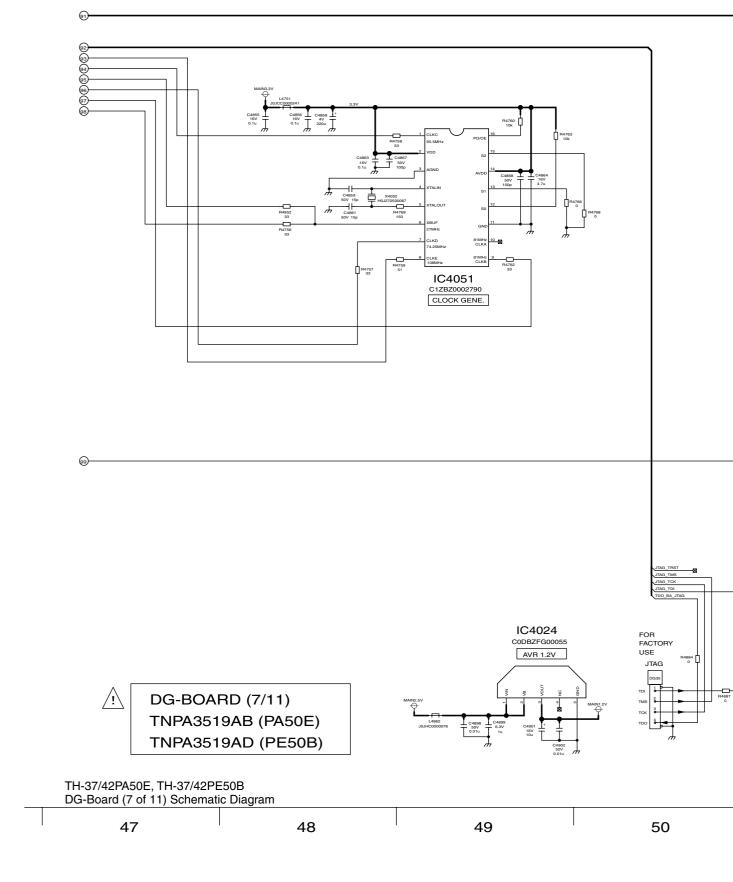





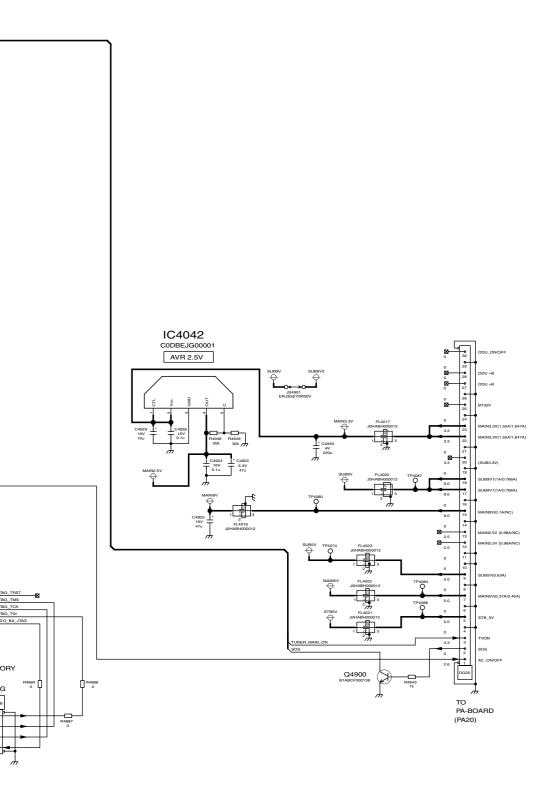





## 14.34. DG-Board (8 of 11) Schematic Diagram

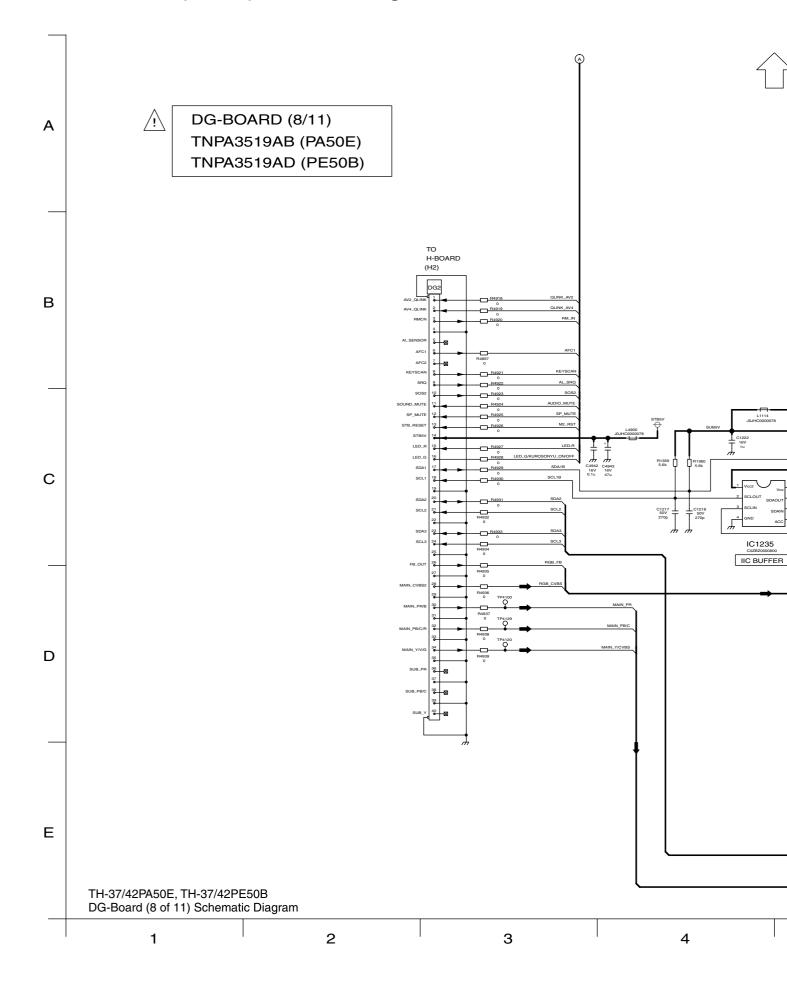

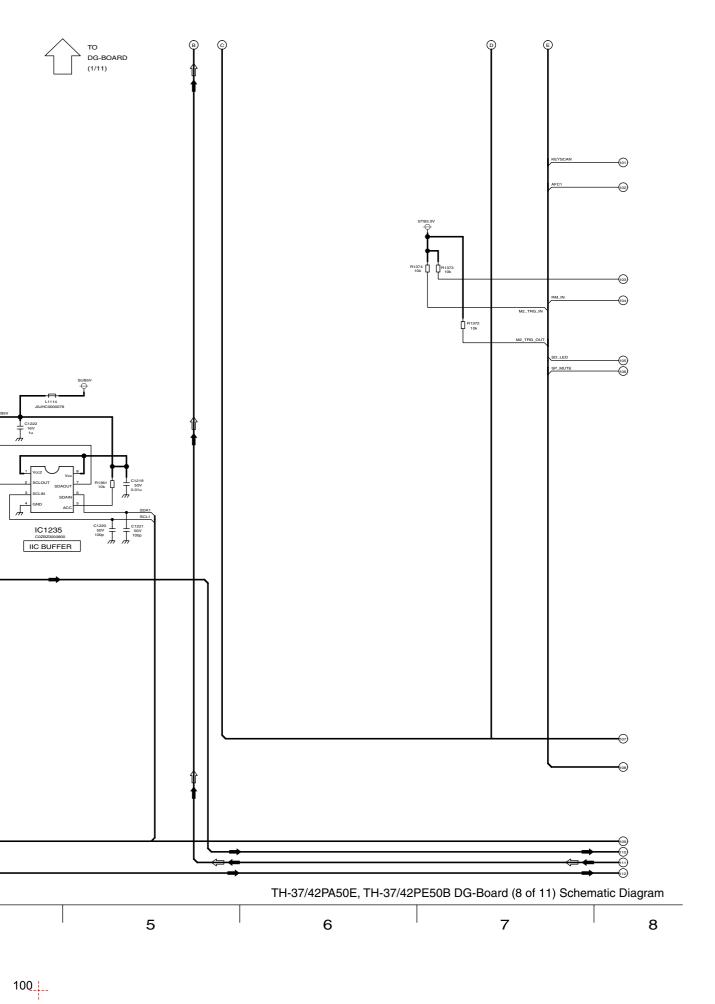


## 14.35. DG-Board (9 of 11) Schematic Diagram

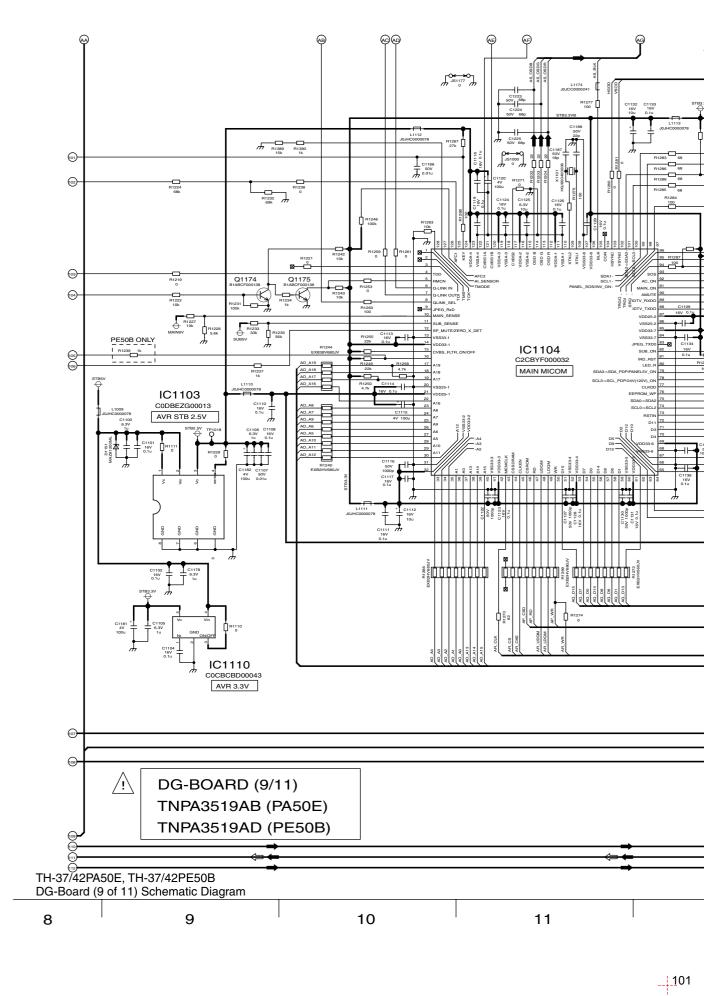

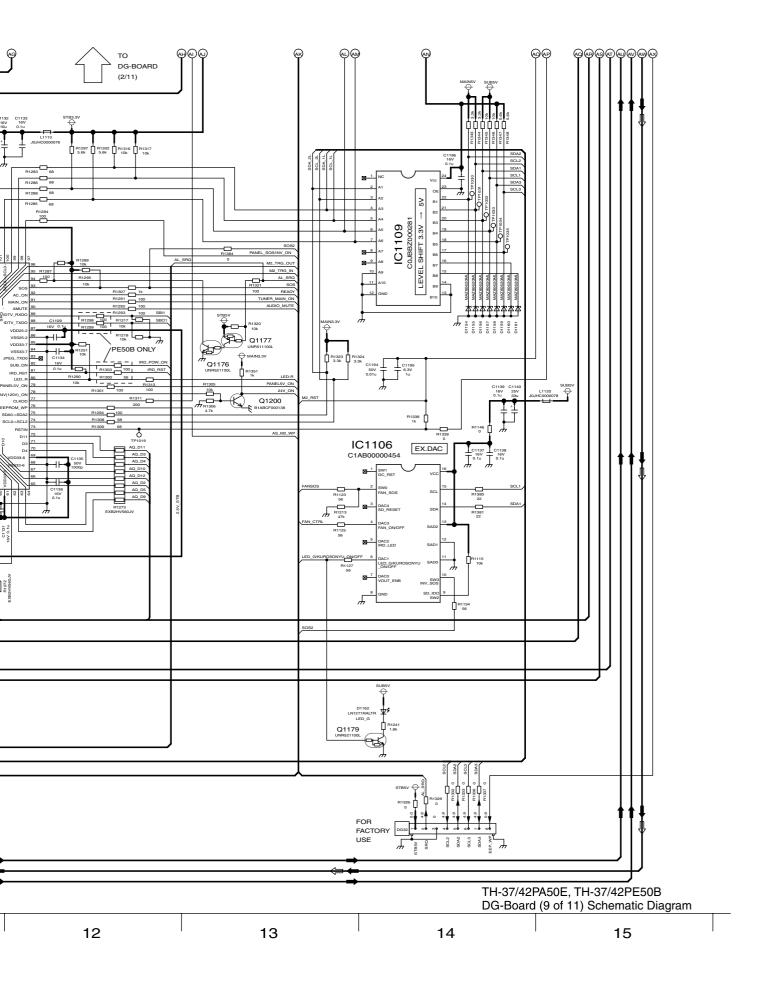



## 14.36. DG-Board (10 of 11) Schematic Diagram

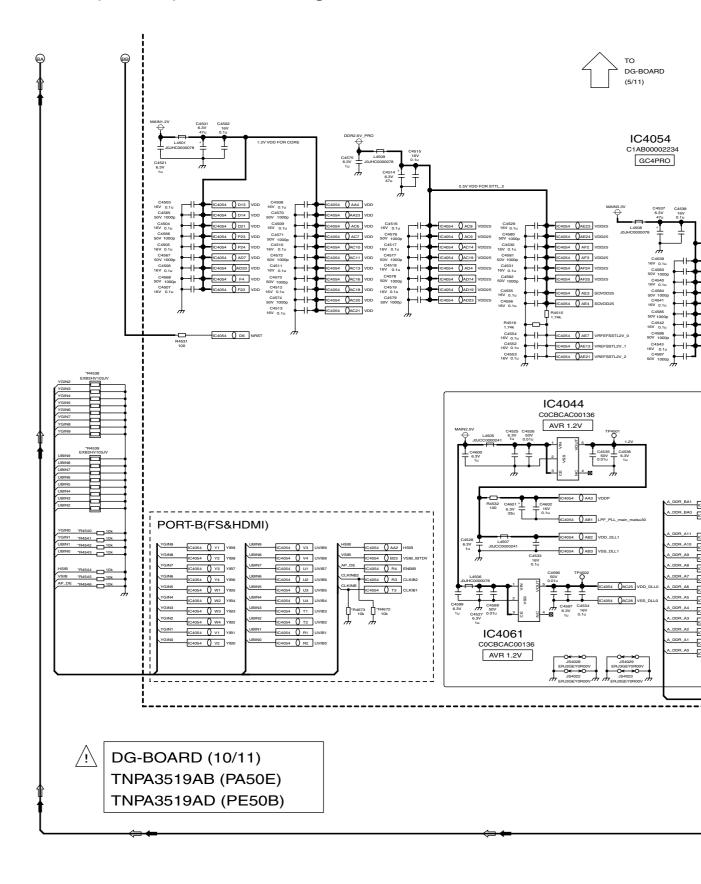






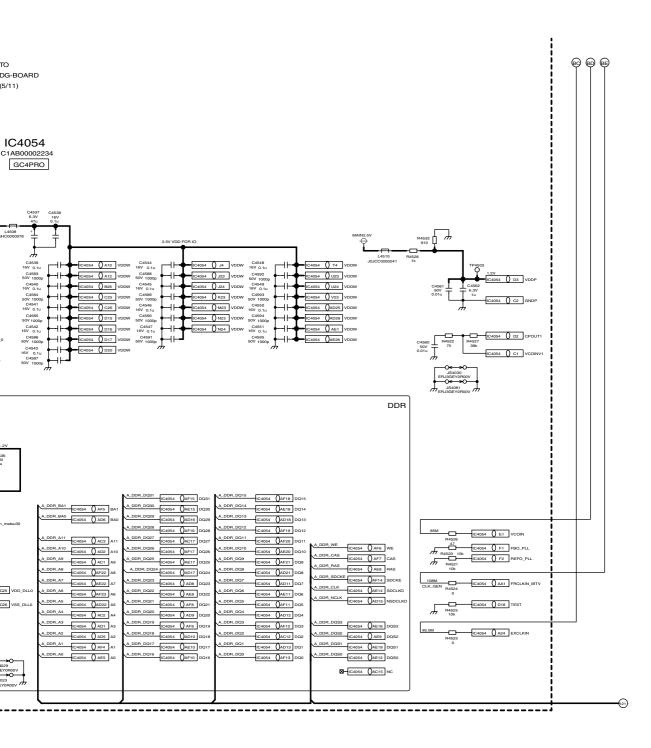








# 14.37. DG-Board (11 of 11) Schematic Diagram



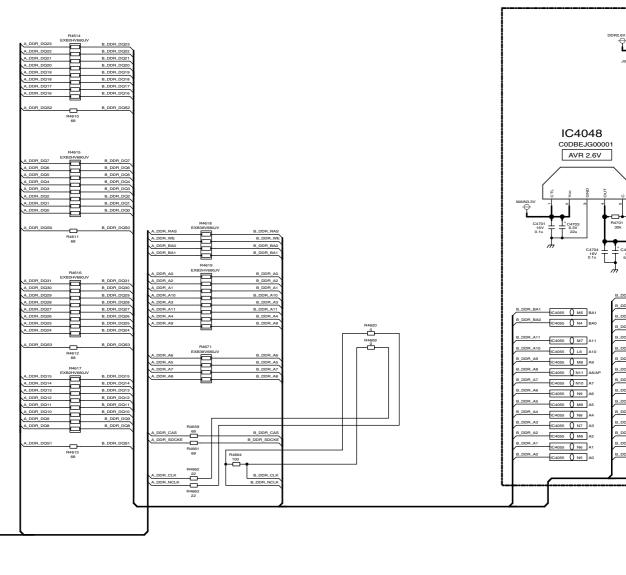






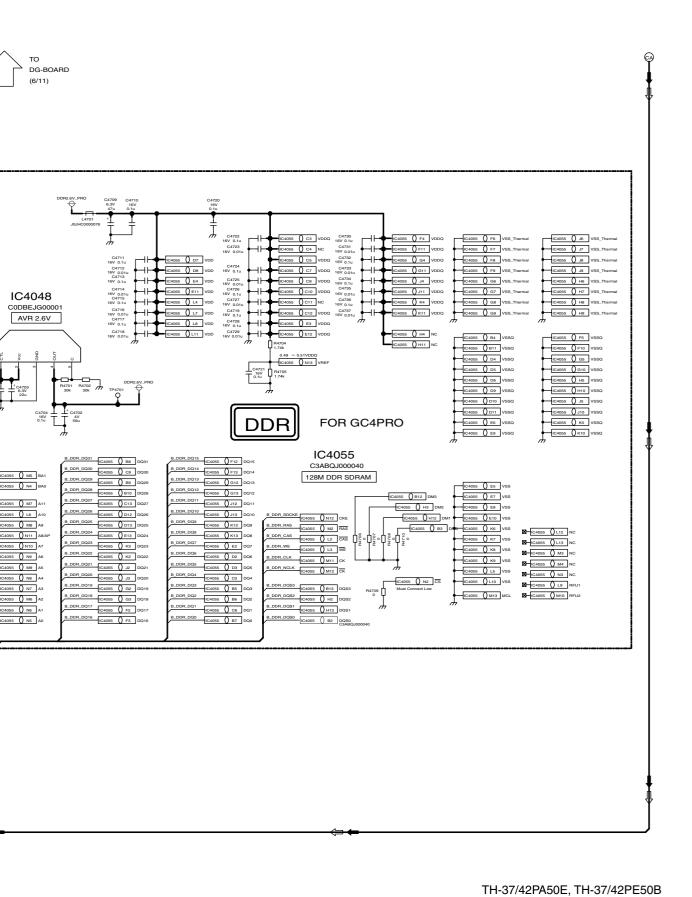


DG-Board (11 of 11) Schematic Diagram

43 44 45 46

#### 14.38. D-Board Block Diagram

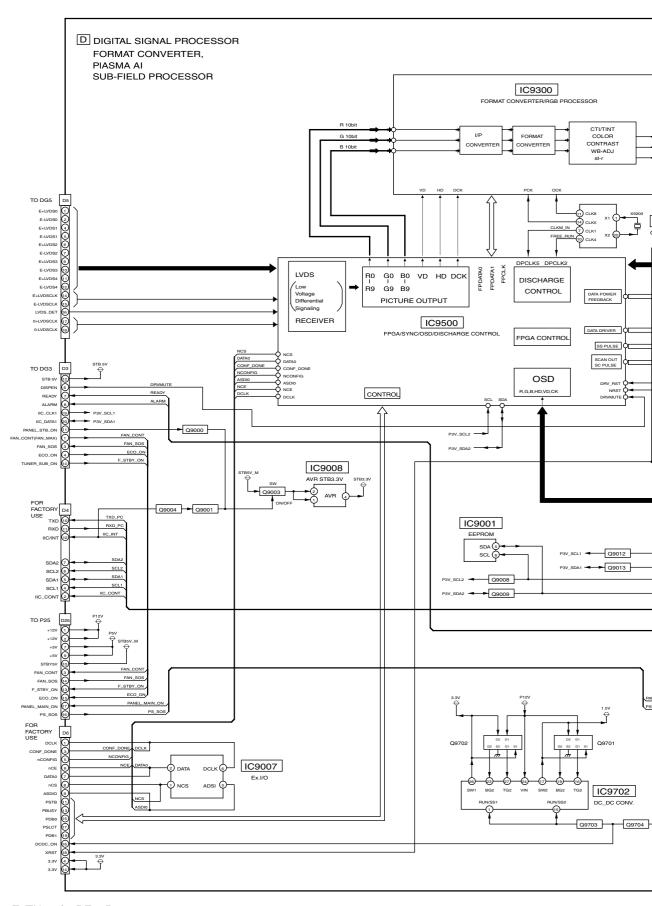



TH-37/42PA50E, TH-37/42PE50B D-Board Block Diagram

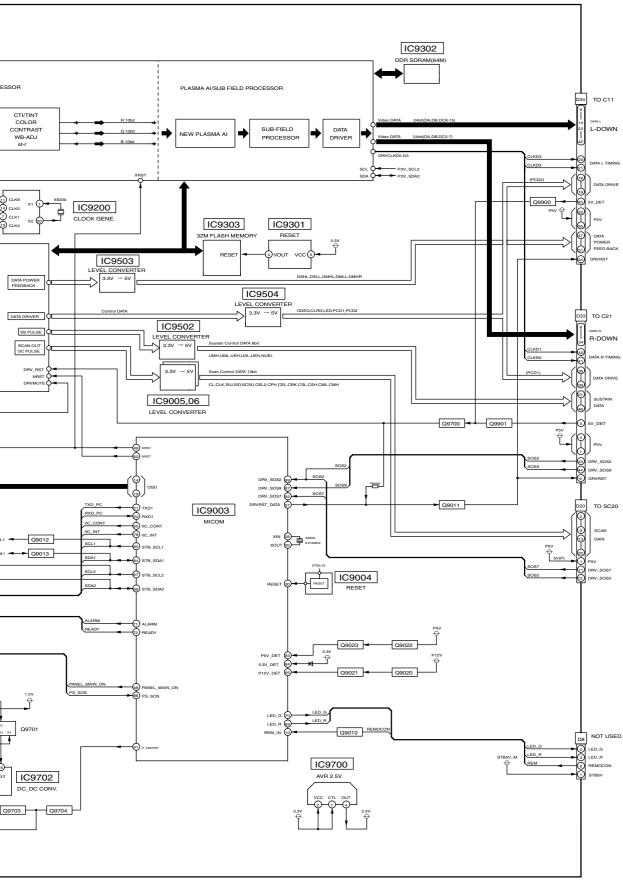


TH-37/42PA50E, TH-37/42PE50B D-Board Block Diagram


# 14.39. D-Board (1 of 6) Schematic Diagram

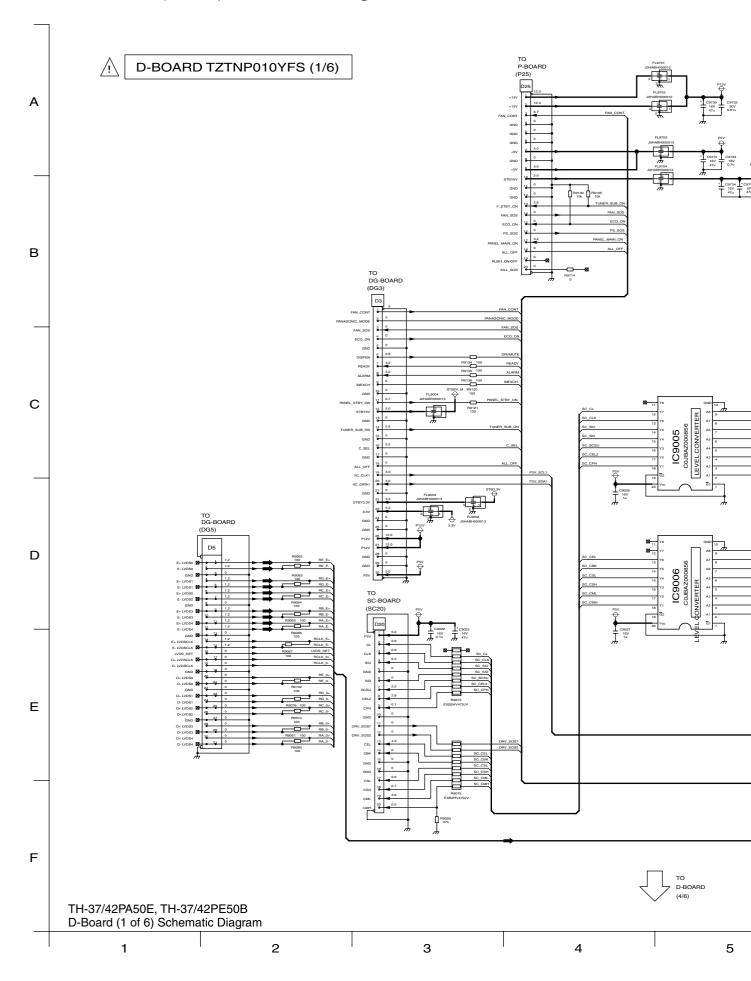

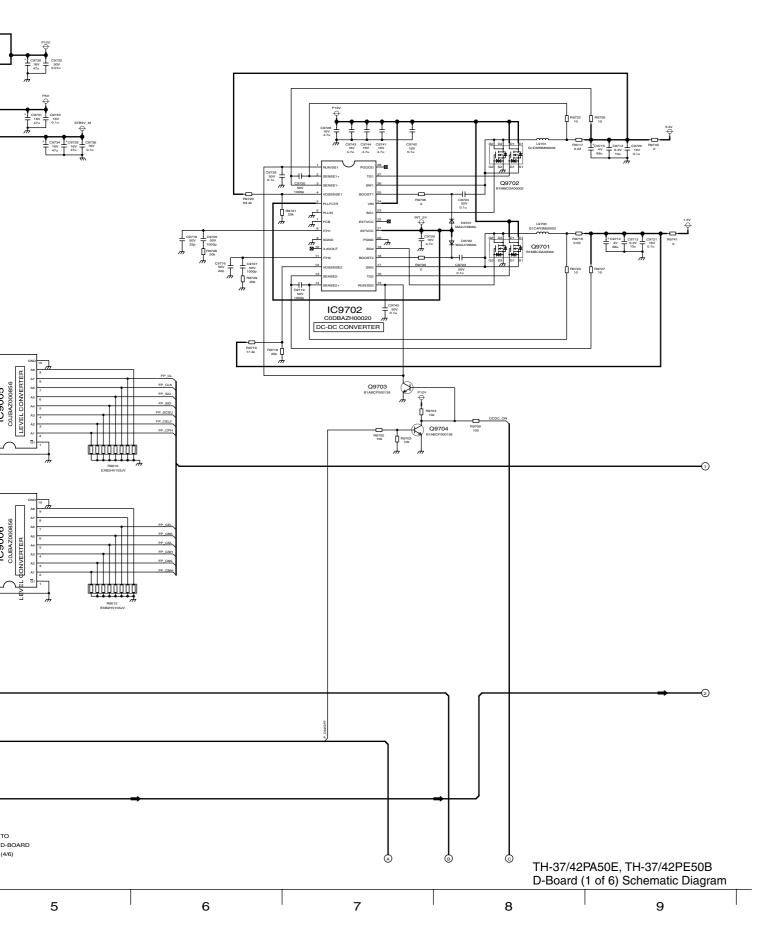


# 14.40. D-Board (2 of 6) Schematic Diagram

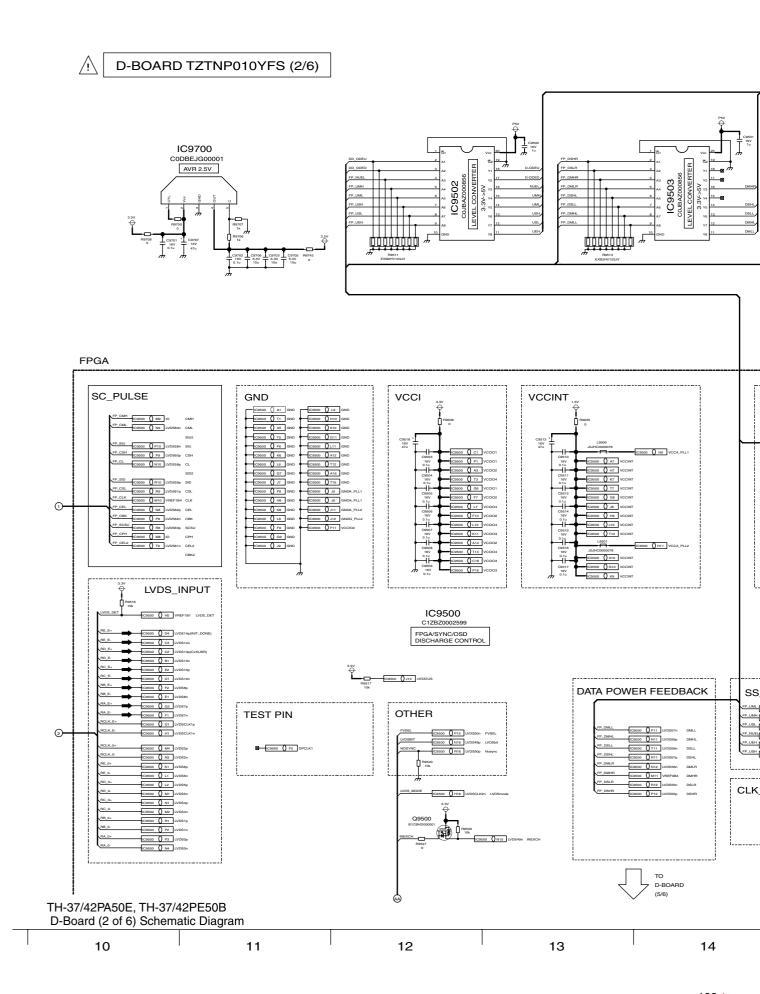

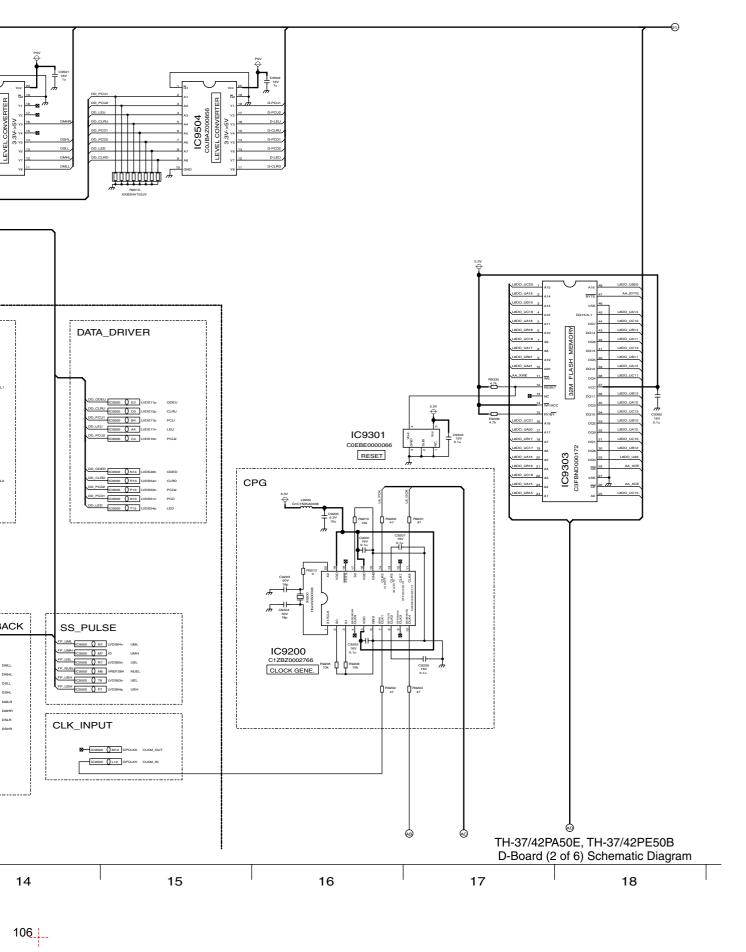

## 14.41. D-Board (3 of 6) Schematic Diagram

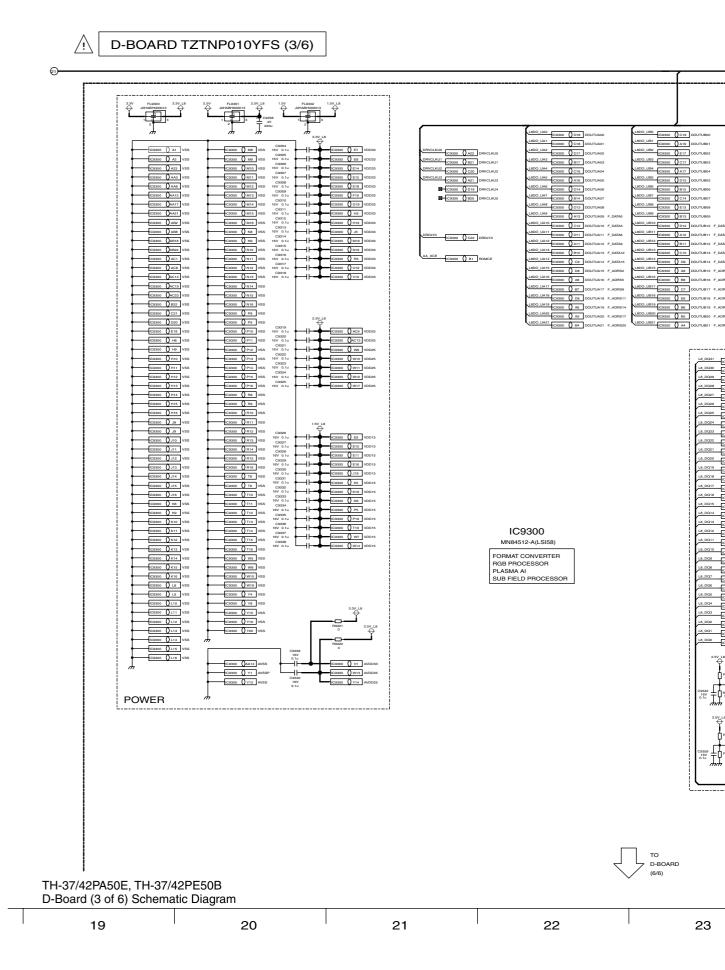

25


26

27


23

24


# 14.42. D-Board (4 of 6) Schematic Diagram

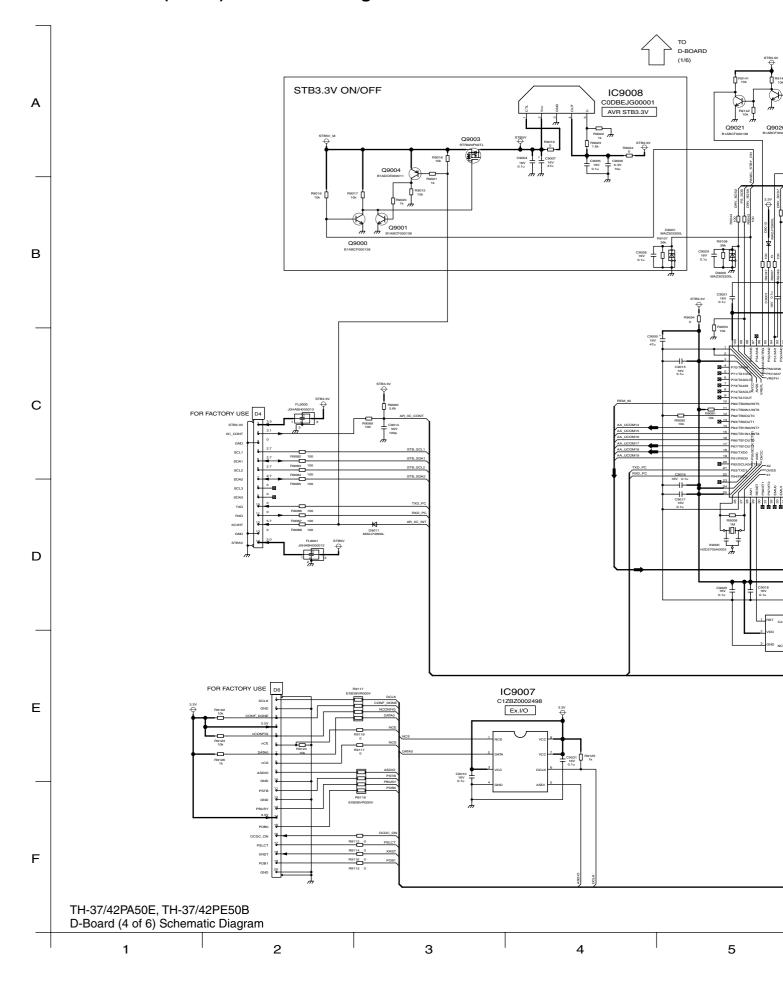




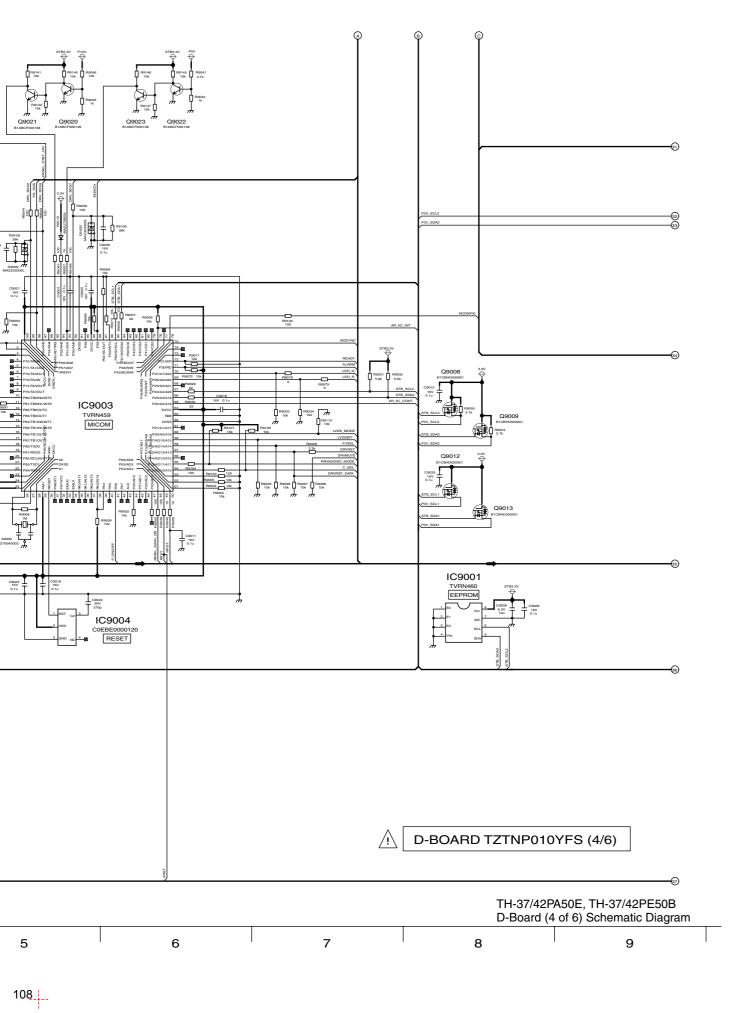

# 14.43. D-Board (5 of 6) Schematic Diagram

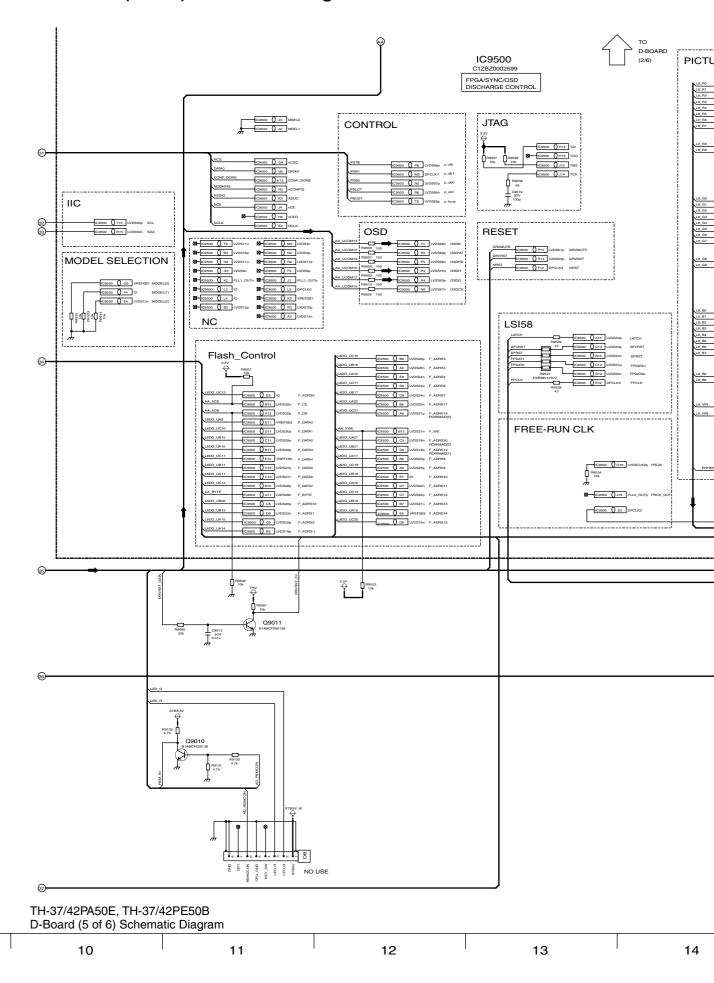



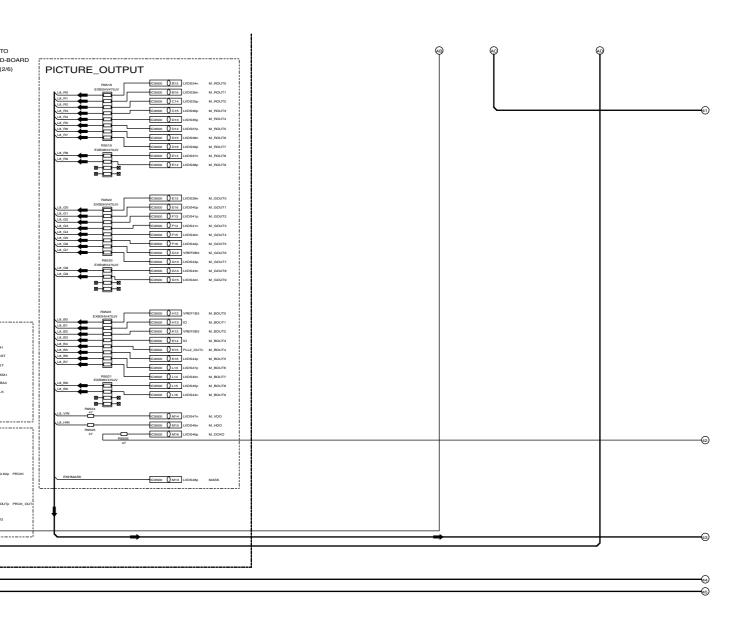


#### /i\


D-BOARD TZTNP010YFS (5/6)

14 15 16 17 18 TH-37/42PA50E, TH-37/42PE50B D-Board (5 of 6) Schematic Diagram

## 14.44. D-Board (6 of 6) Schematic Diagram

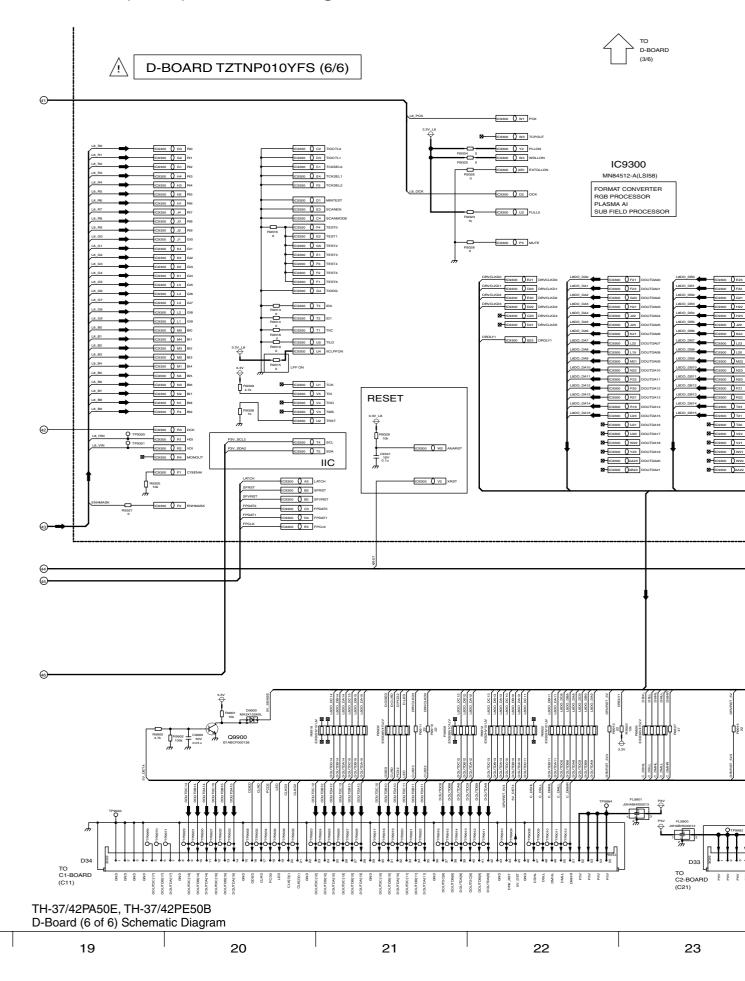




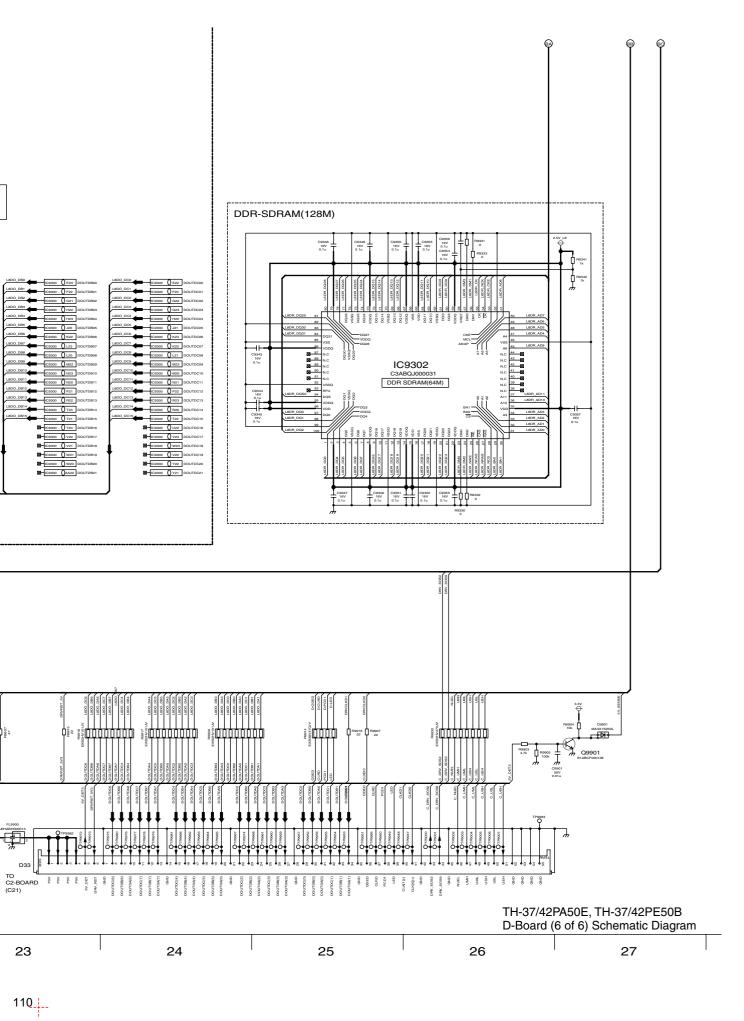


#### ---


# 14.45. C1 and C2-Board Block Diagram

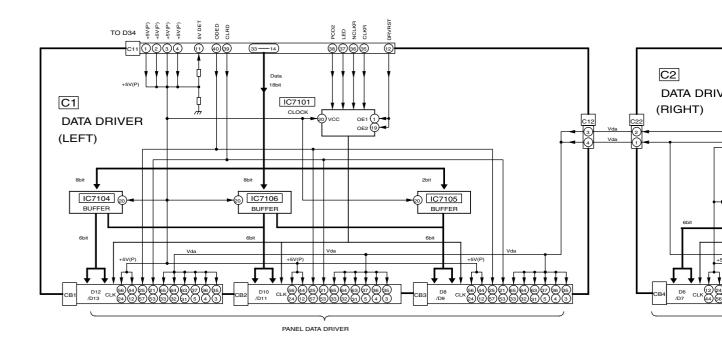




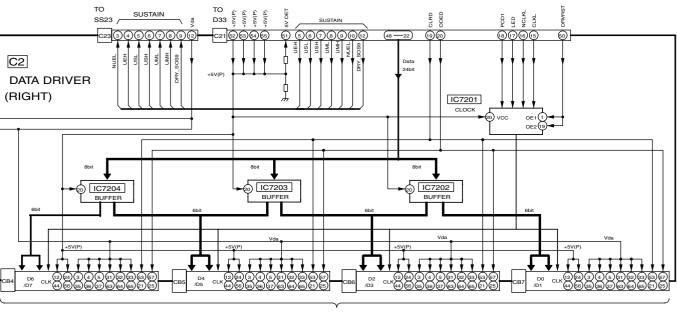

# 14.46. C1-Board (1 of 2) Schematic Diagram (37 inch)

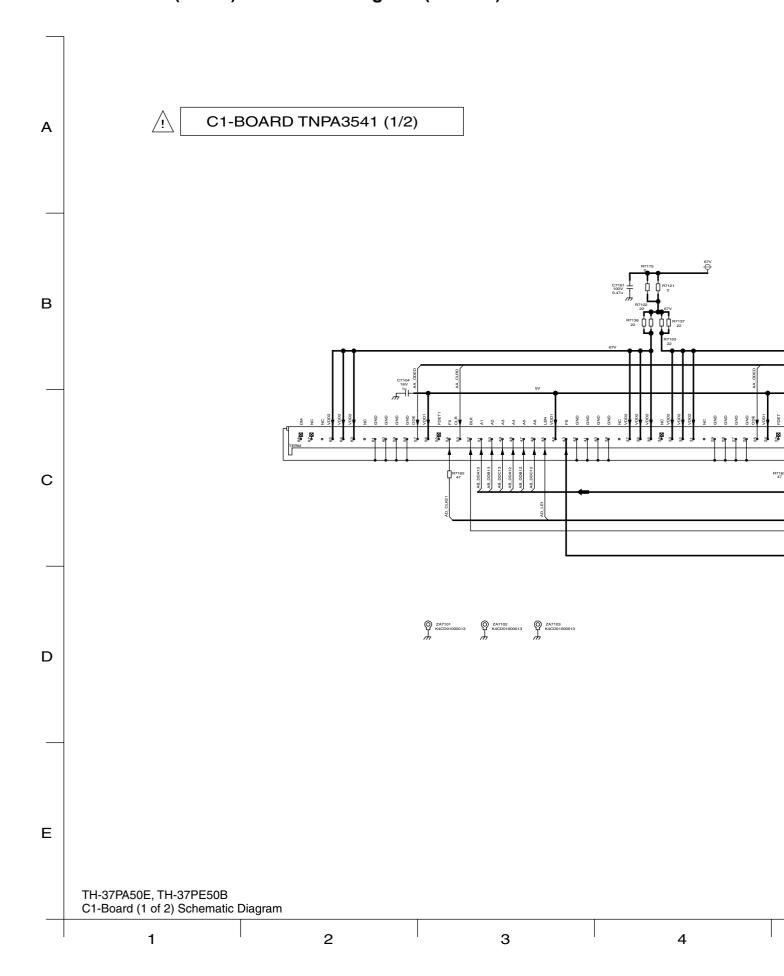




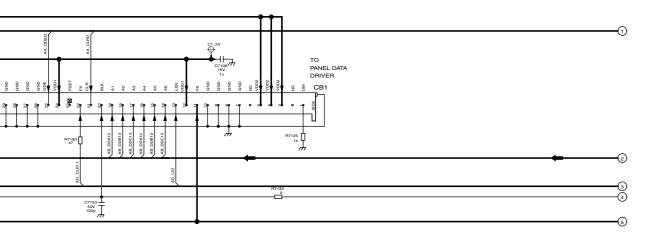


			TH-37PA50E, TH-37PE50B C1-Board (1 of 2) Schematic Diagram	
	5	6	7	8

#### --


# 14.47. C1-Board (2 of 2) Schematic Diagram (37 inch)

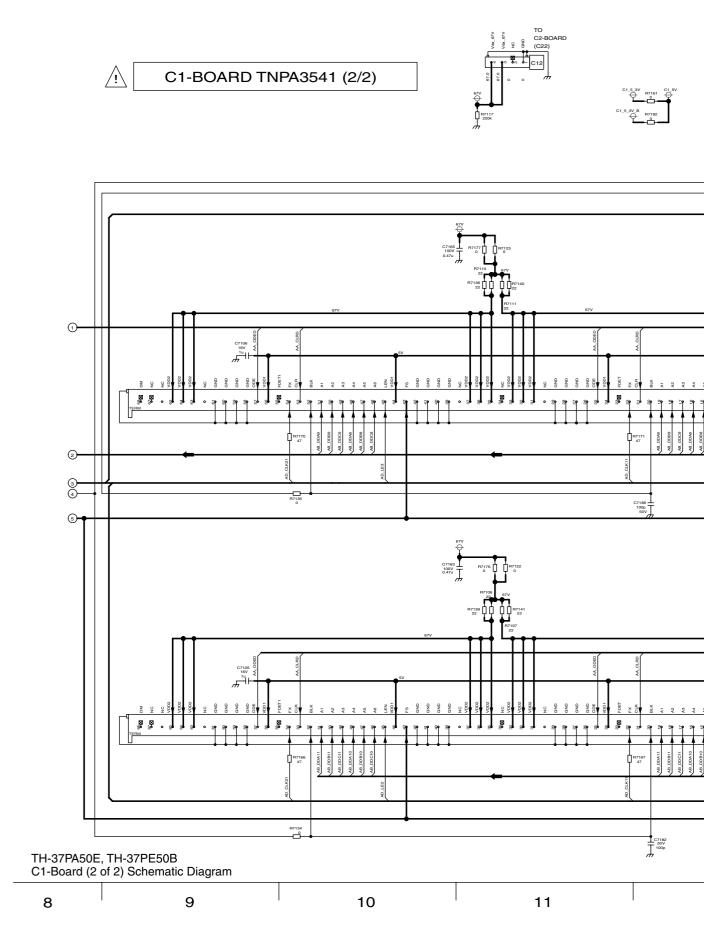




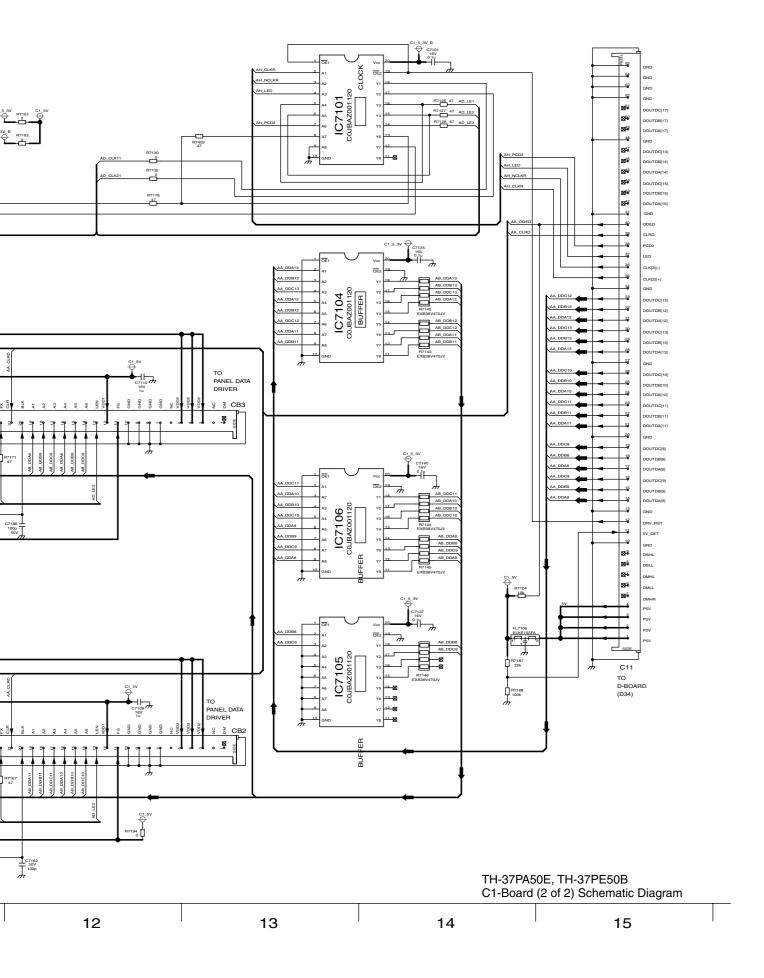

# 14.48. C1-Board (1 of 2) Schematic Diagram (42 inch)

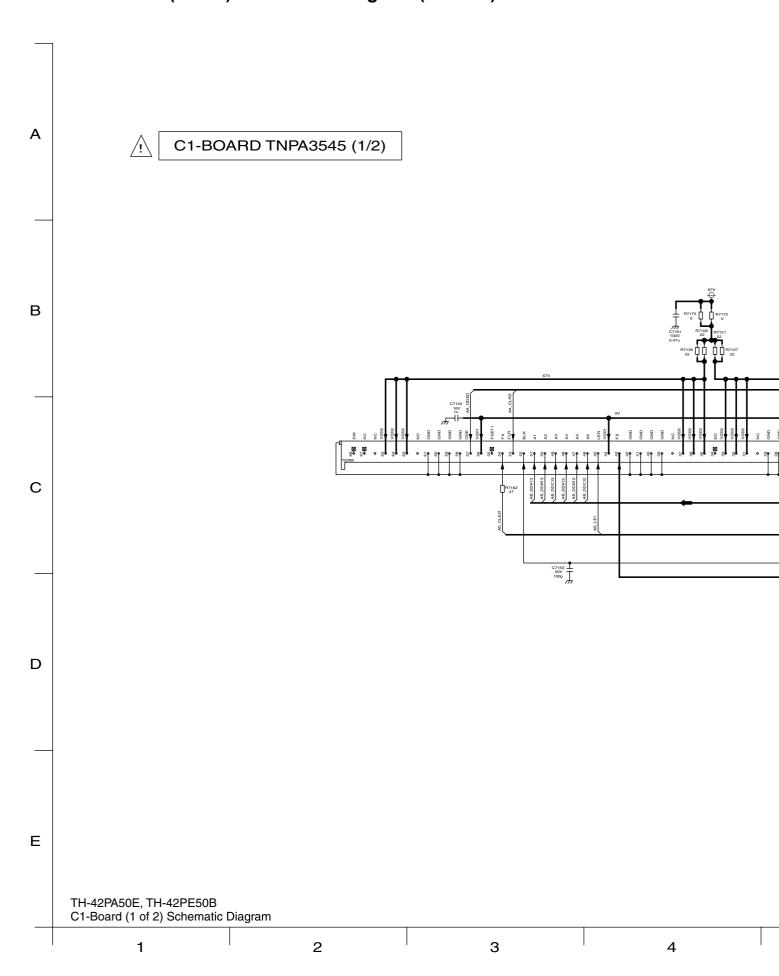



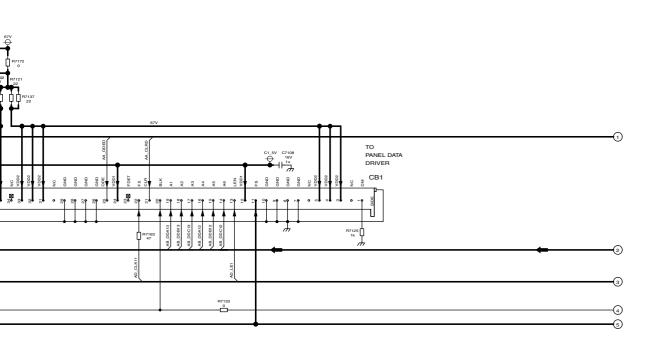






# 14.49. C1-Board (2 of 2) Schematic Diagram (42 inch)


8


C1-BOARD TNPA3545 (2/2) 2 3 4)-C7182 50V 100p TH-42PA50E, TH-42PE50B C1-Board (2 of 2) Schematic Diagram 9 10 11



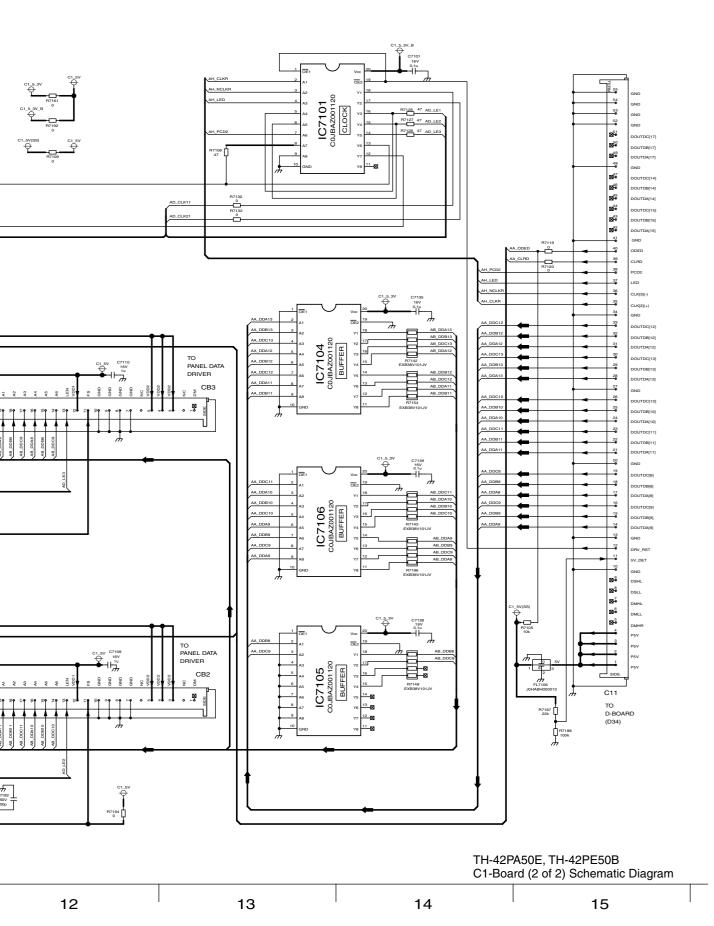


# 14.50. C2-Board (1 of 2) Schematic Diagram (37 inch)

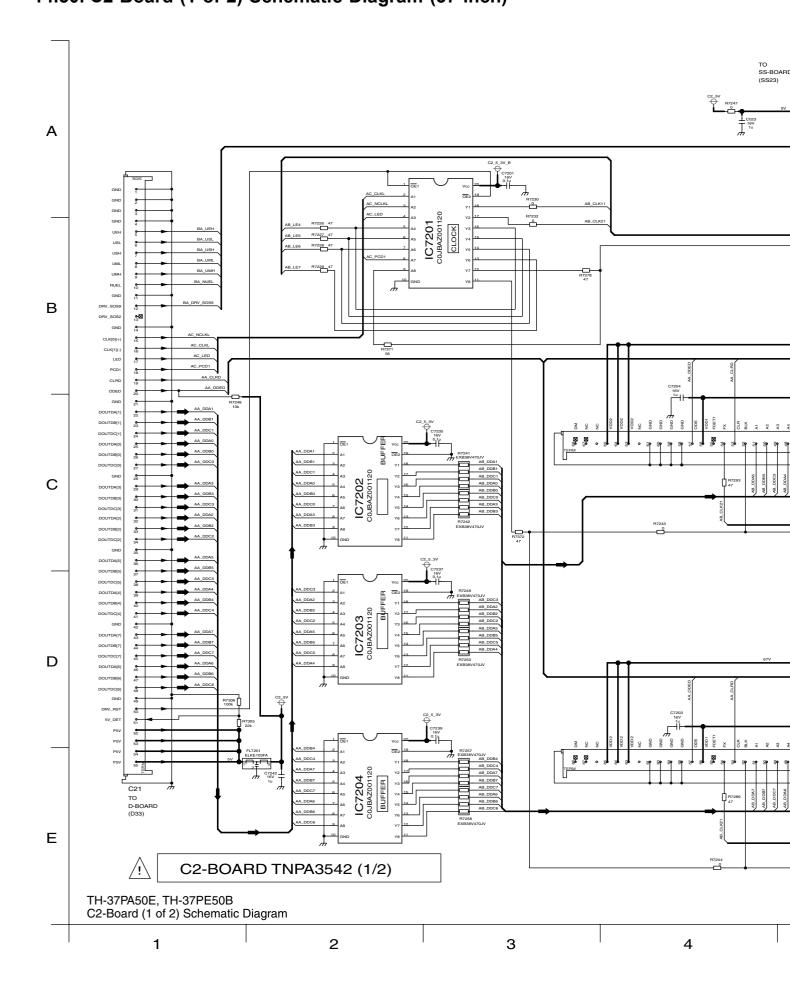

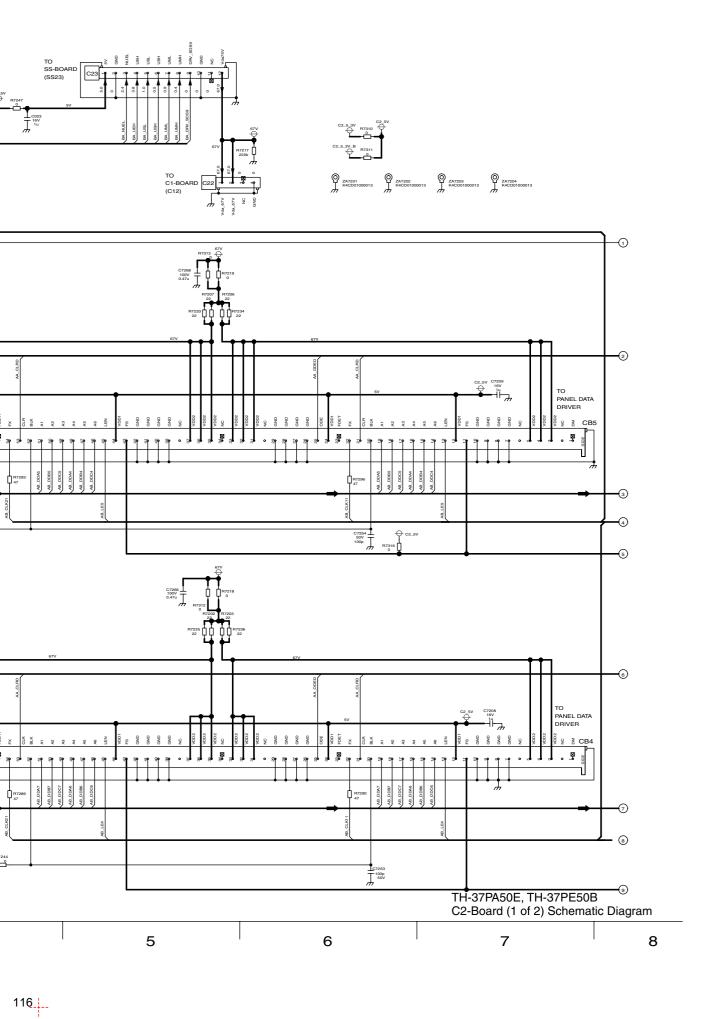


#### ---


# 14.51. C2-Board (2 of 2) Schematic Diagram (37 inch)

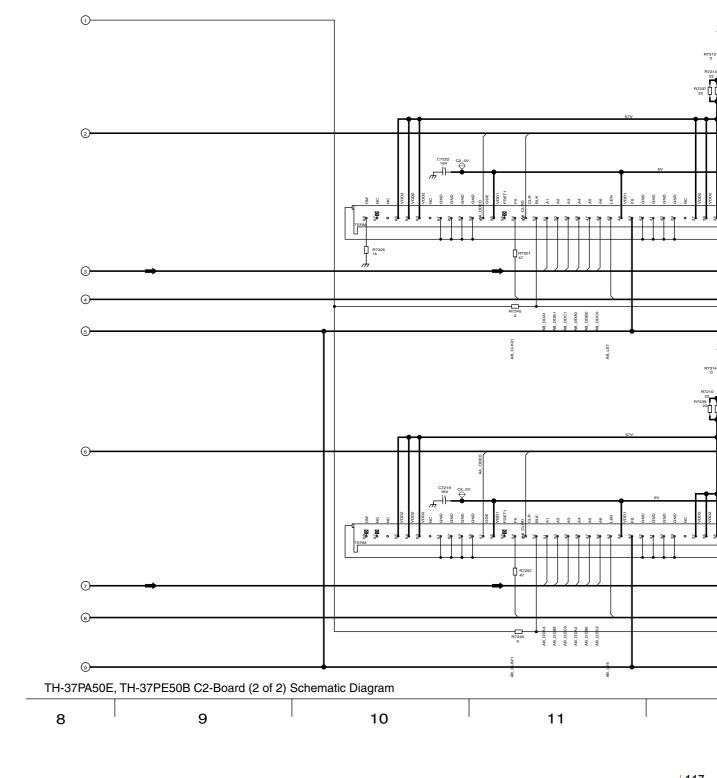




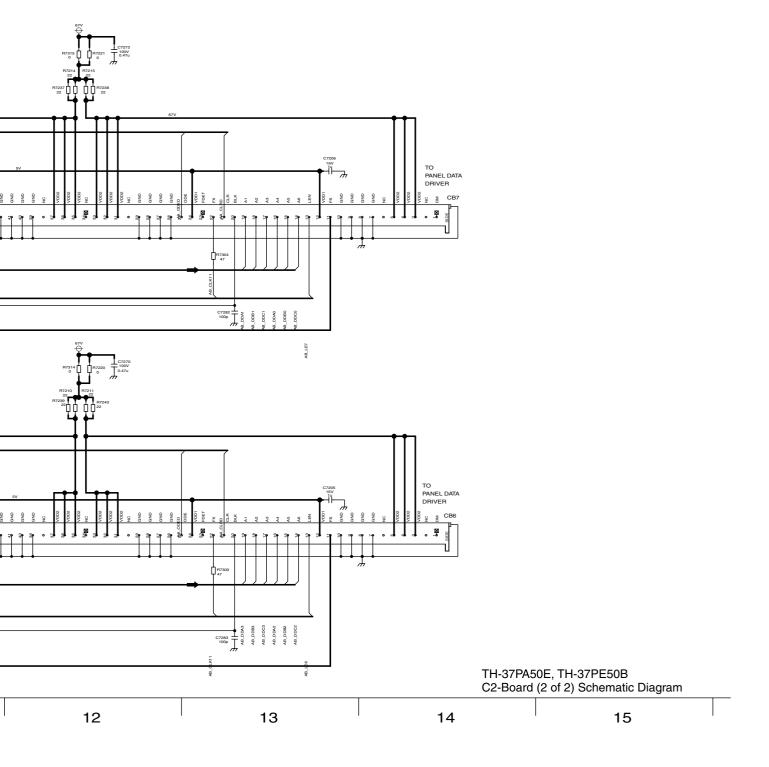


# 14.52. C2-Board (1 of 2) Schematic Diagram (42 inch)

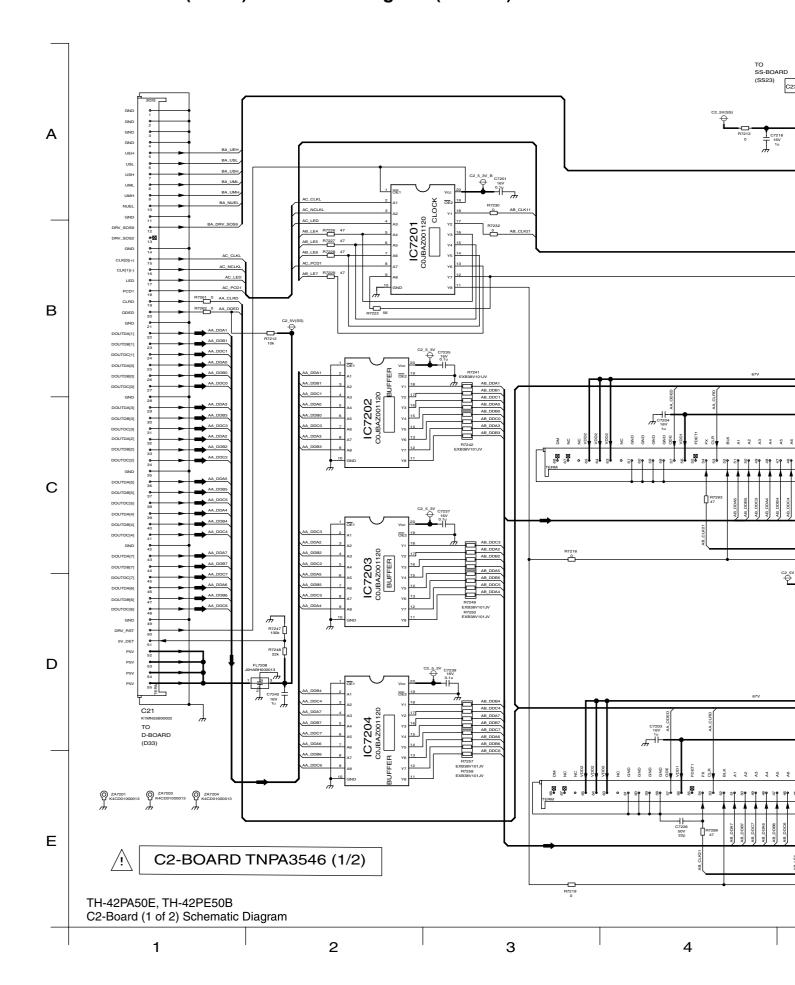




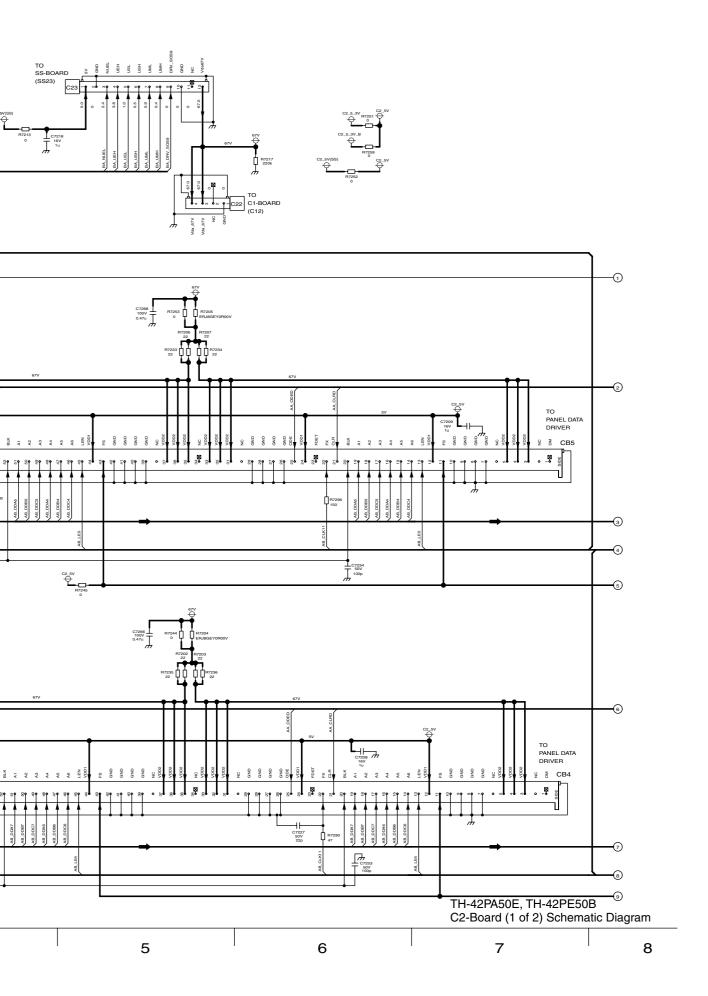


# 14.53. C2-Board (2 of 2) Schematic Diagram (42 inch)

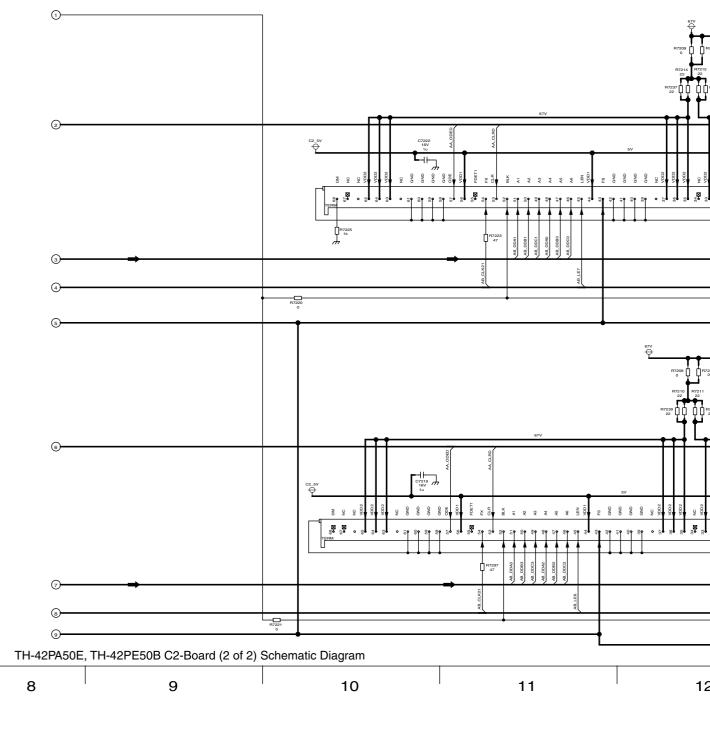




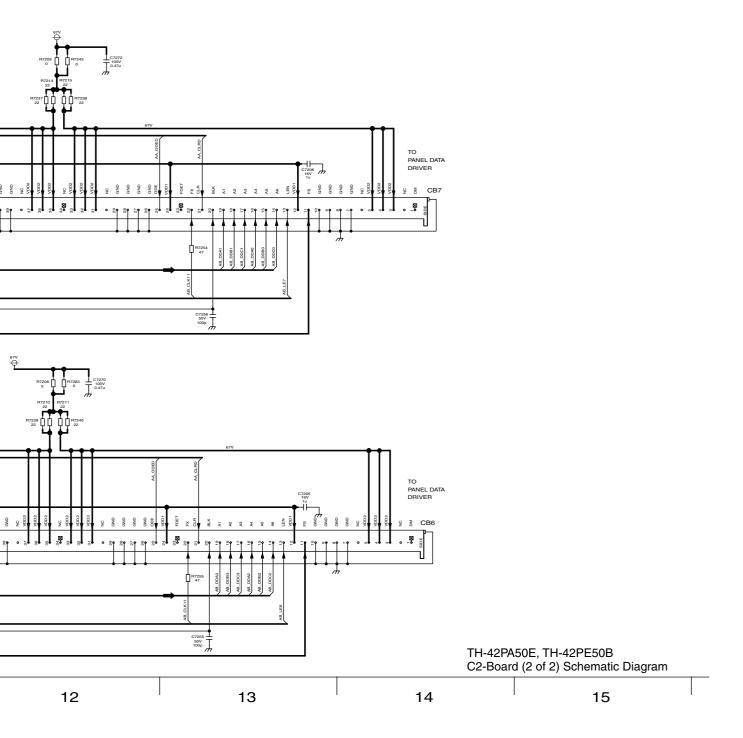

#### 14.54. SC-Board Block Diagram

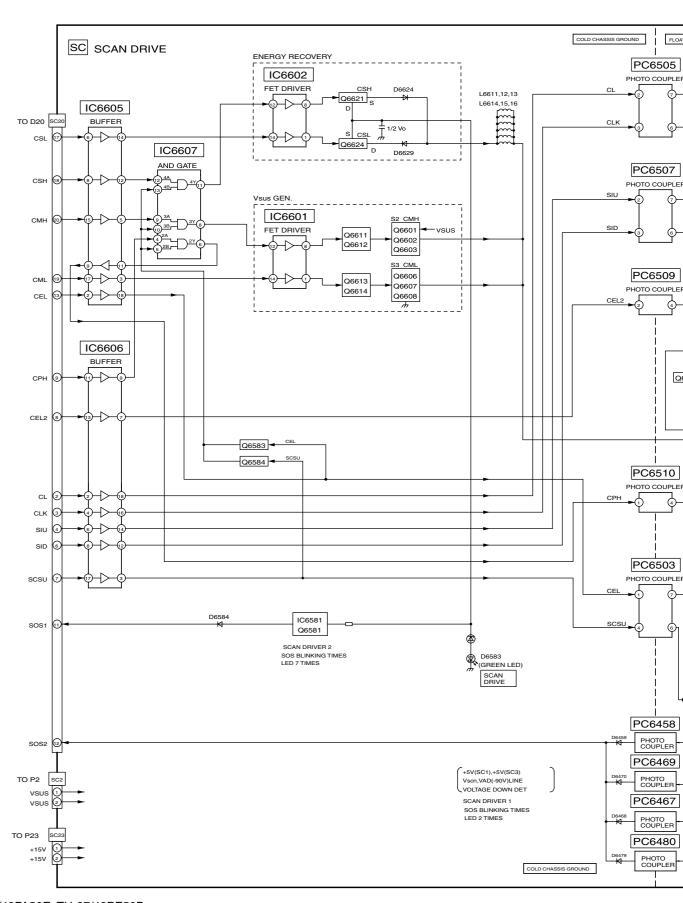



TH-37/42PA50E, TH-37/42PE50B SC-Board Block Diagram

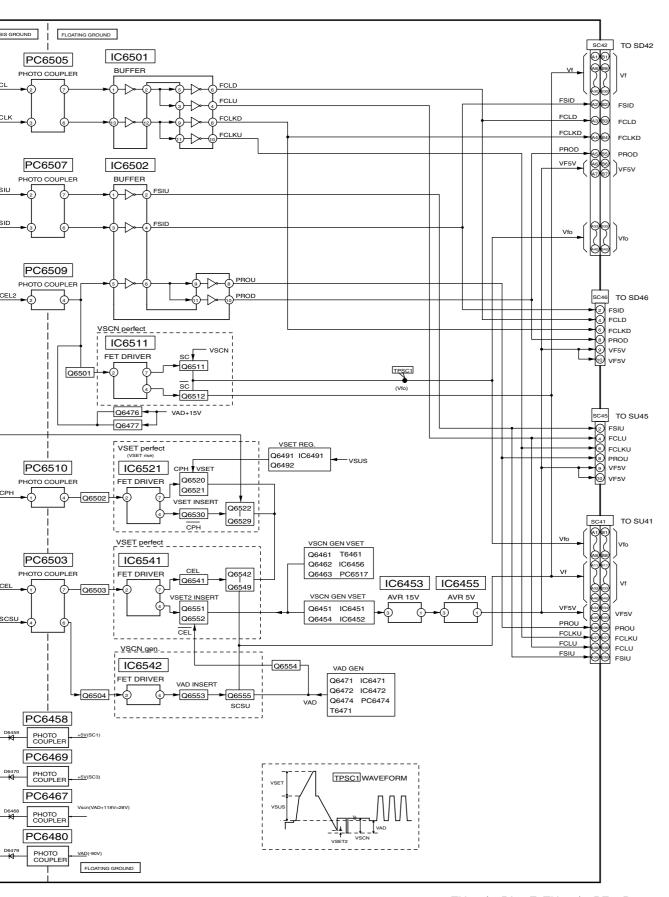


TH-37/42PA50E, TH-37/42PE50B SC-Board Block Diagram


### 14.55. SC-Board (1 of 2) Schematic Diagram

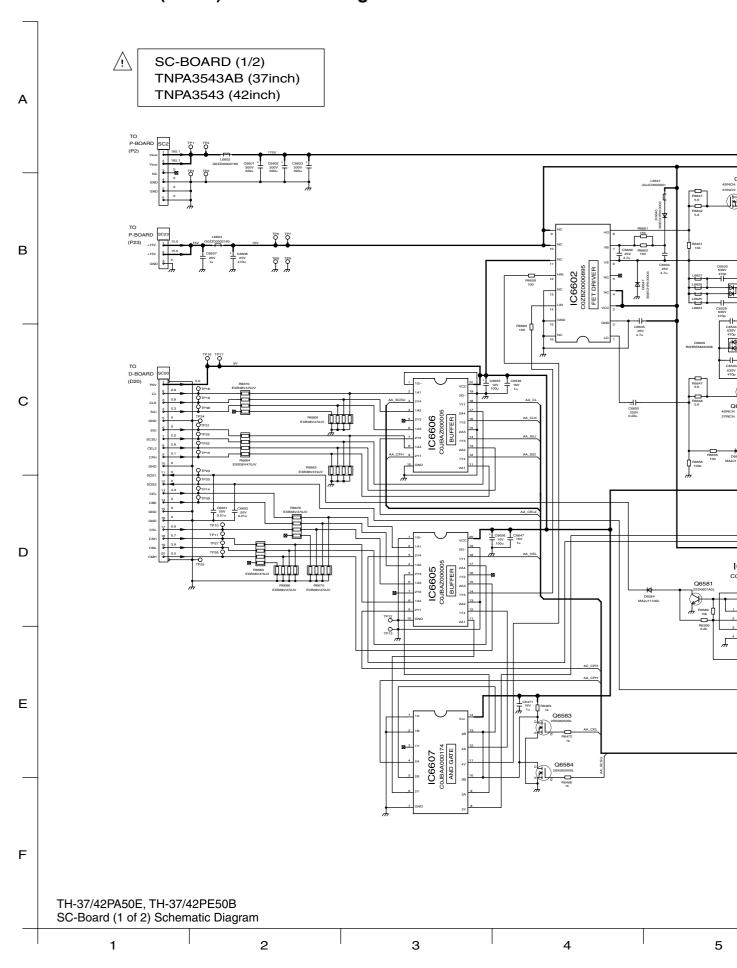


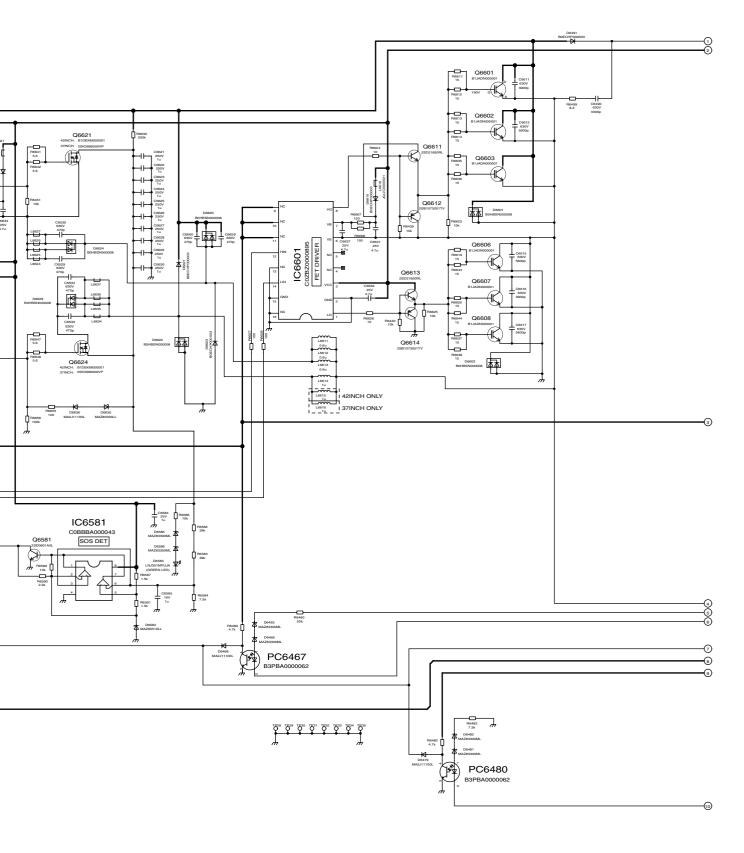




### 14.56. SC-Board (2 of 2) Schematic Diagram

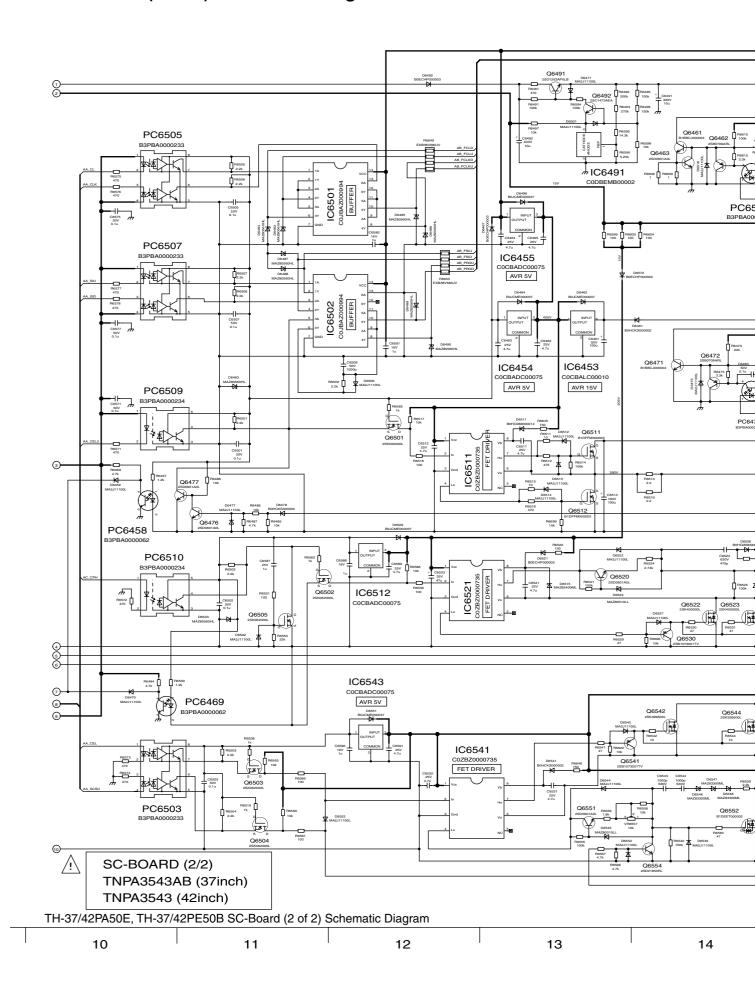

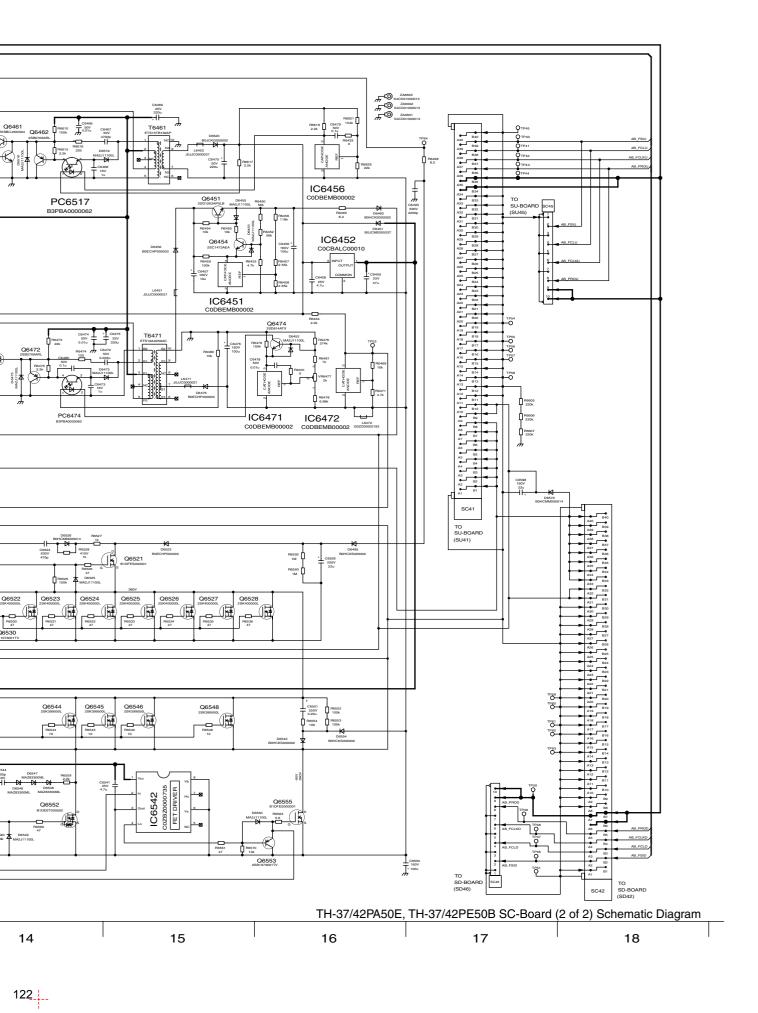

#### 14.57. SU-Board Block Diagram

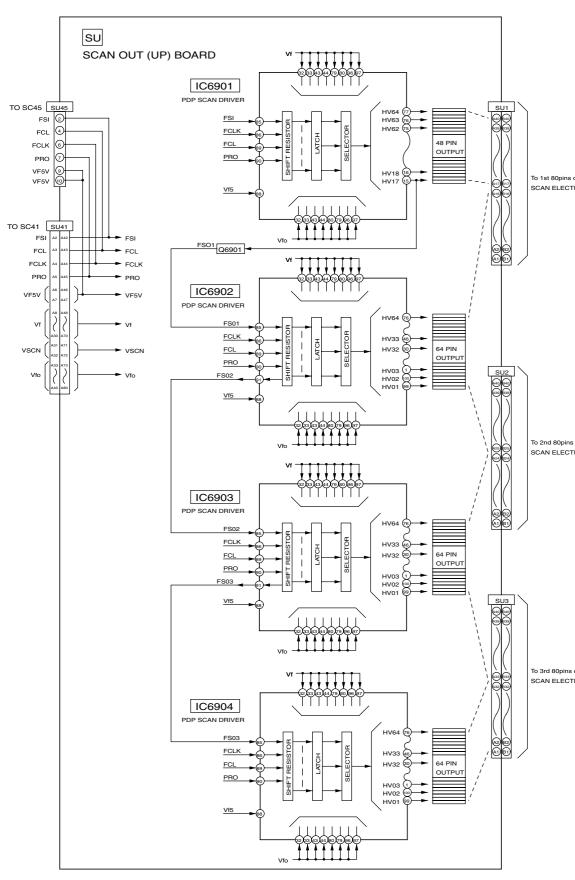

TH-37/42PA50E, TH-37/42PE50B SU-Board Block Diagram




To 1st 80pins of SCAN ELECTRODES


To 2nd 80pins of SCAN ELECTRODES

To 3rd 80pins of SCAN ELECTRODES

# 14.58. SU-Board Schematic Diagram (37 inch)

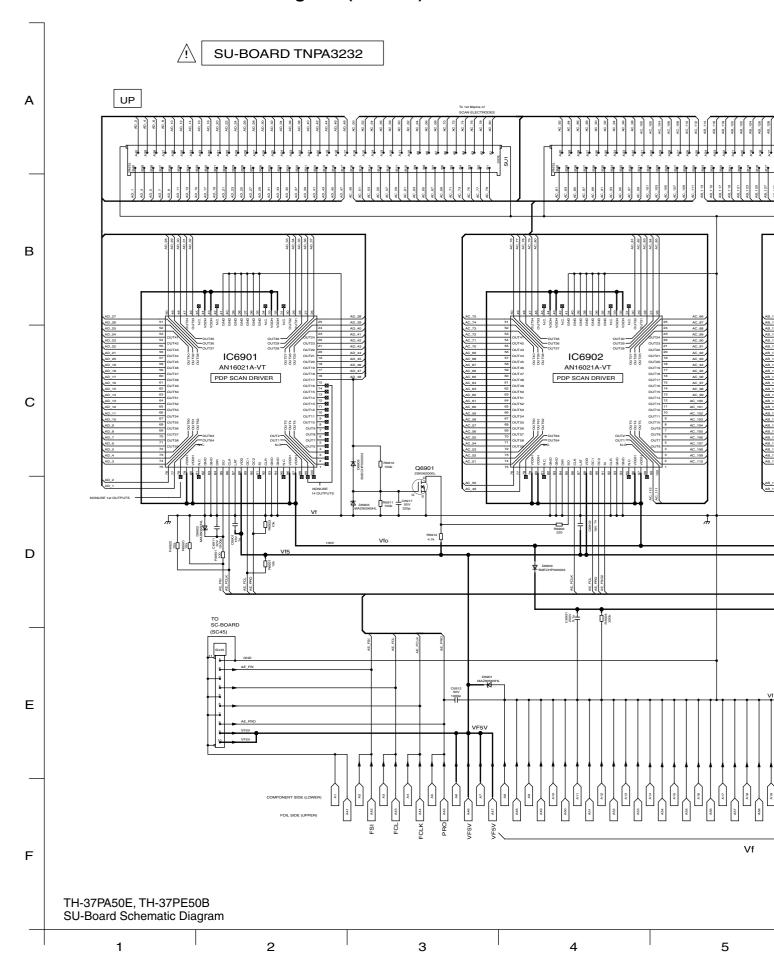



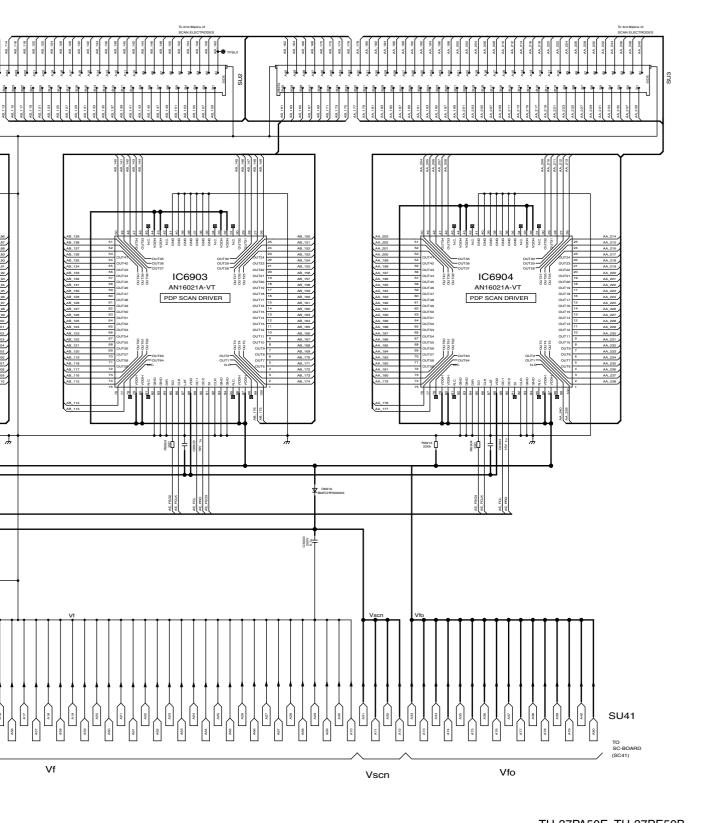


 TH-37PA50E, TH-37PE50B SU-Board Schematic Diagram


 5
 6
 7
 8
 9

#### ----

### 14.59. SU-Board Schematic Diagram (42 inch)

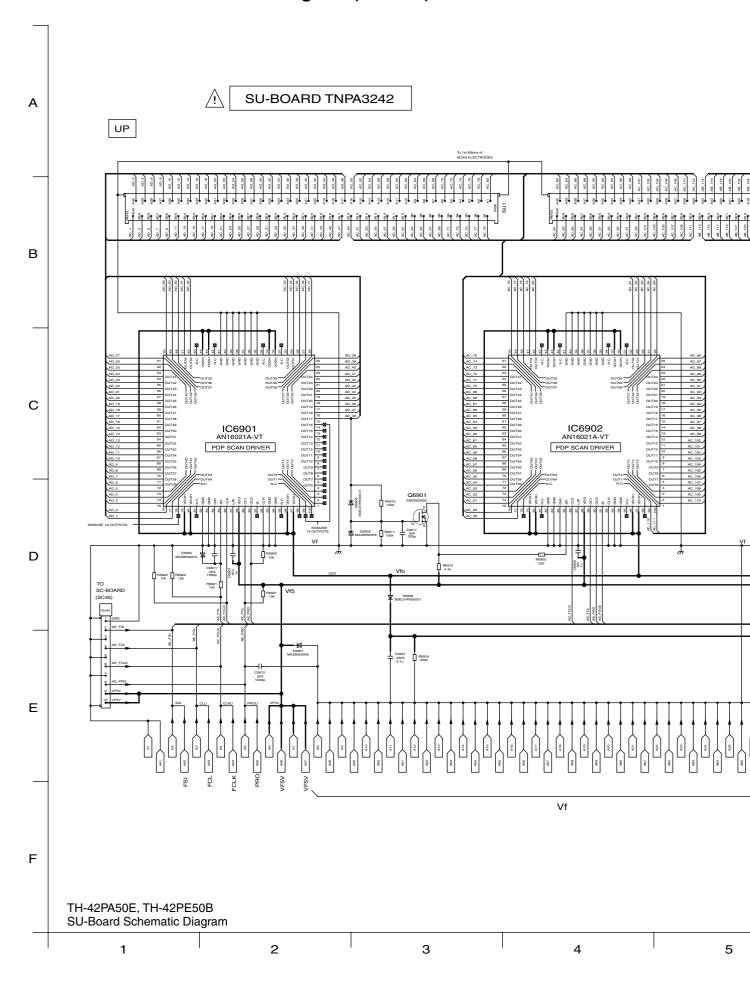




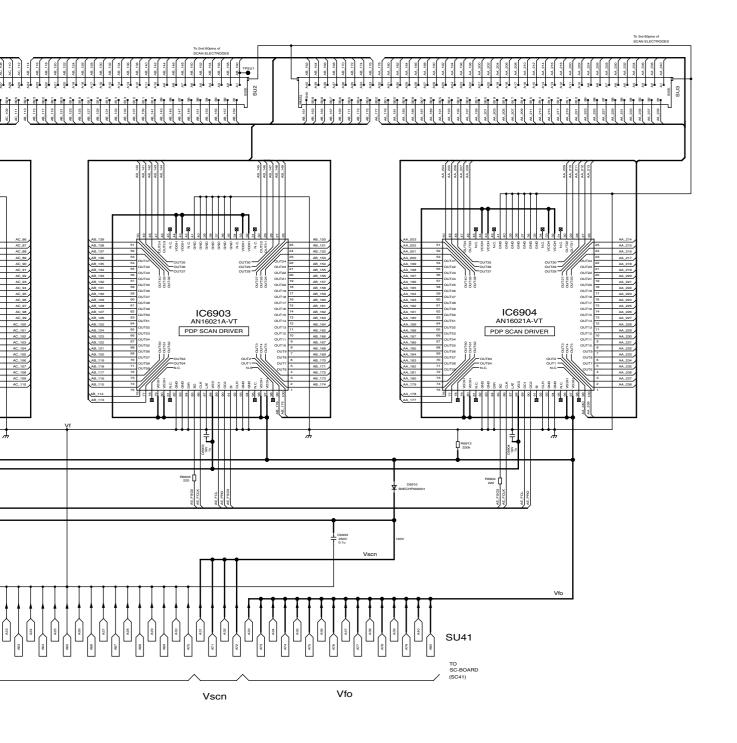



#### 14.60. SD-Board Block Diagram

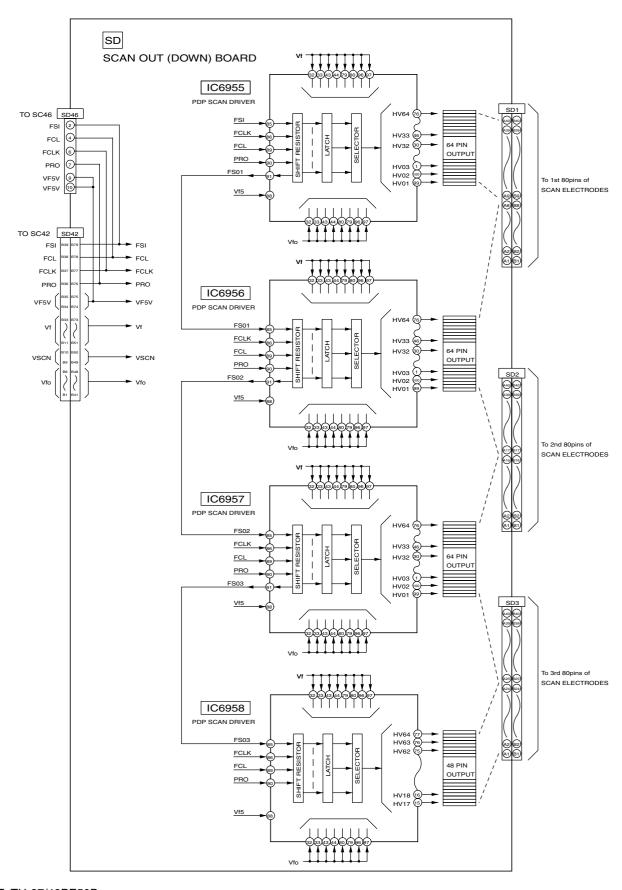


TH-37/42PA50E, TH-37/42PE50B SD-Board Block Diagram

80pins of ELECTRODES


80pins of ELECTRODES


80pins of ELECTRODES

### 14.61. SD-Board Schematic Diagram (37 inch)

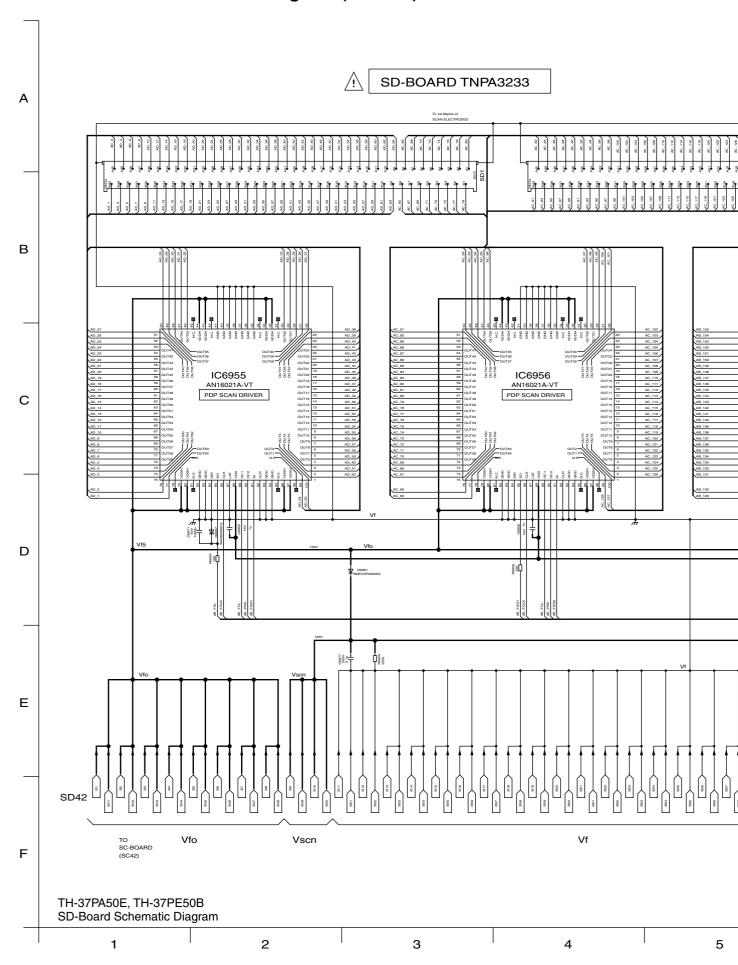




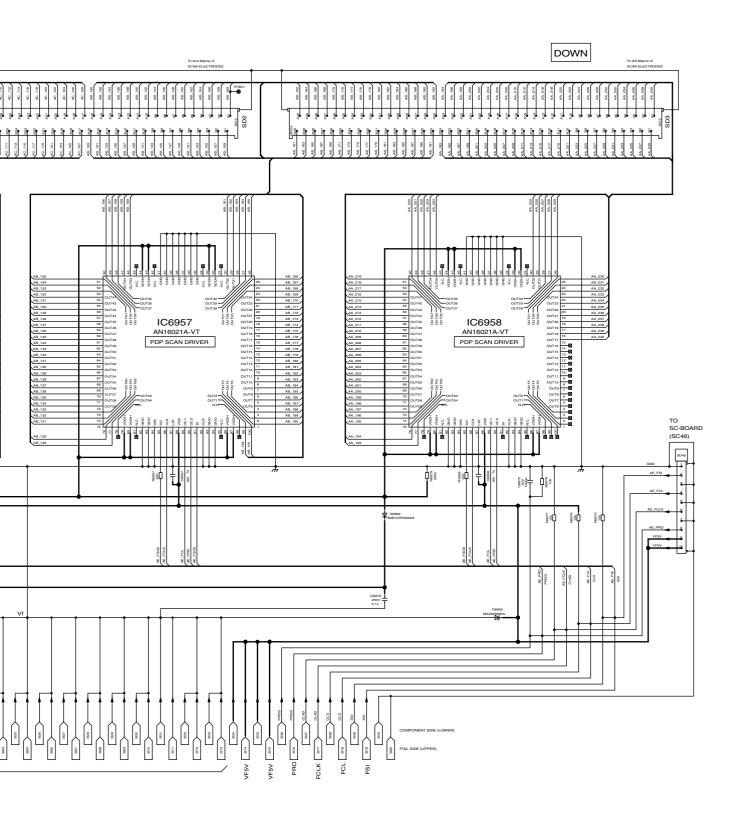




## 14.62. SD-Board Schematic Diagram (42 inch)

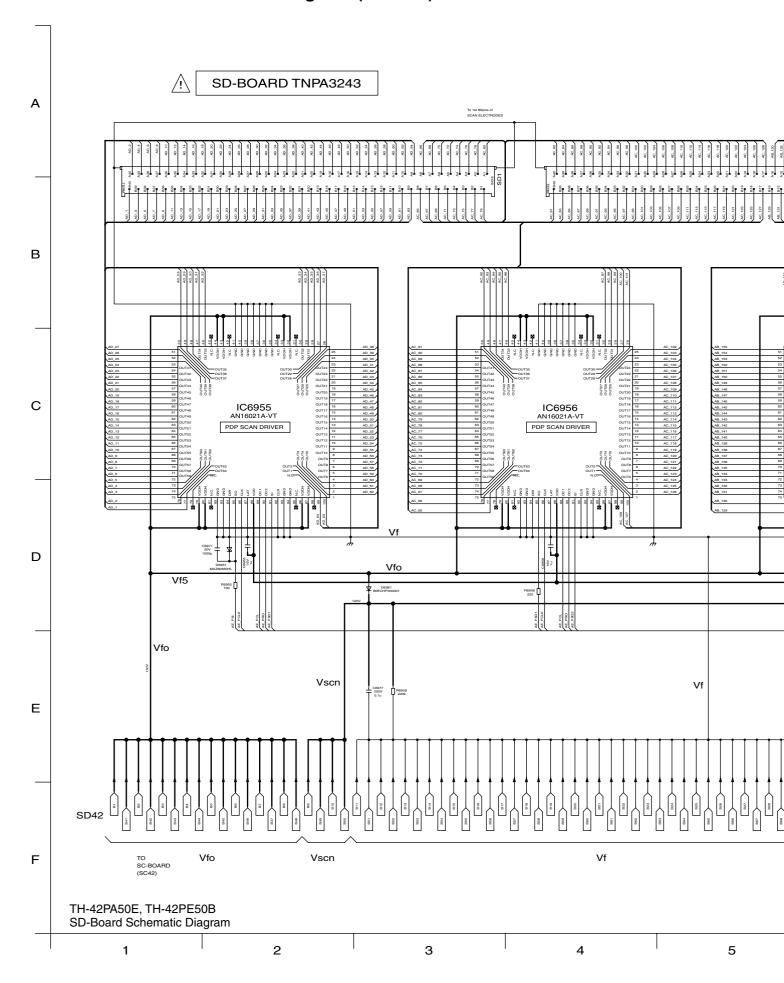




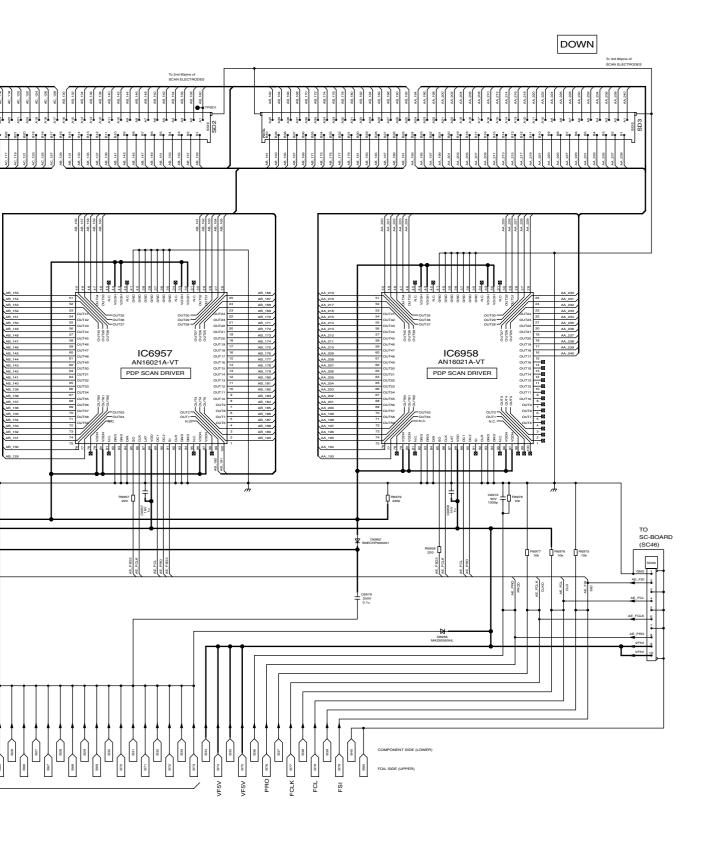

TH-42PA50E, TH-42PE50B SD-Board Schematic Diagram


5 6 7 8 9

#### 14.63. SS-Board Block Diagram

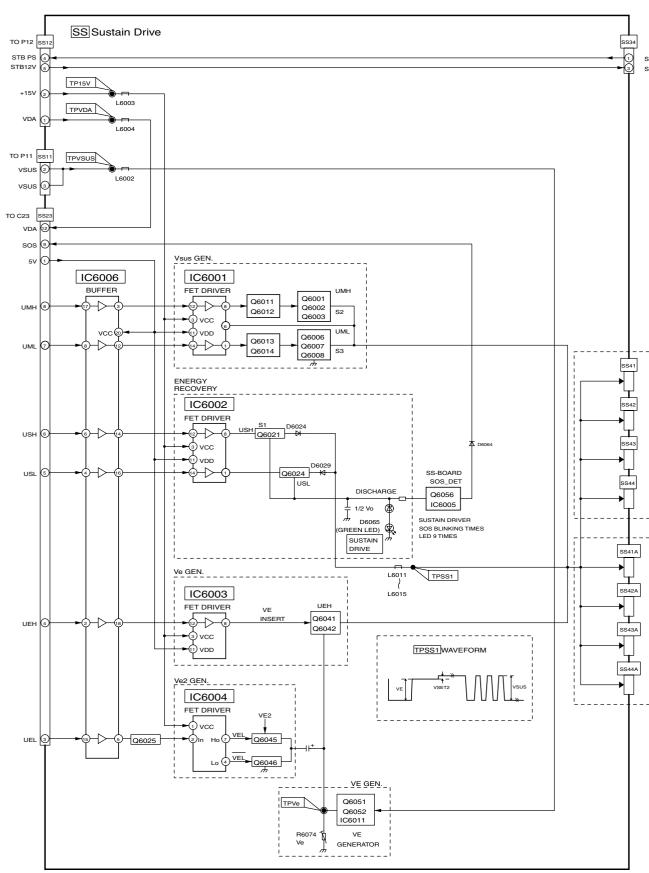



TH-37/42PA50E, TH-37/42PE50B SS-Board Block Diagram



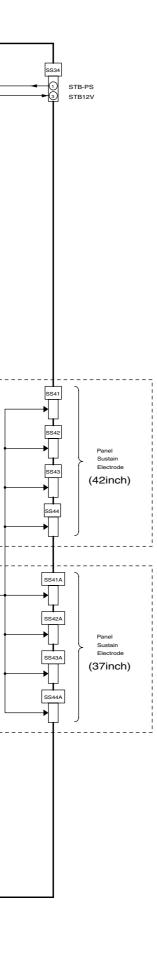

### 14.64. SS-Board Schematic Diagram

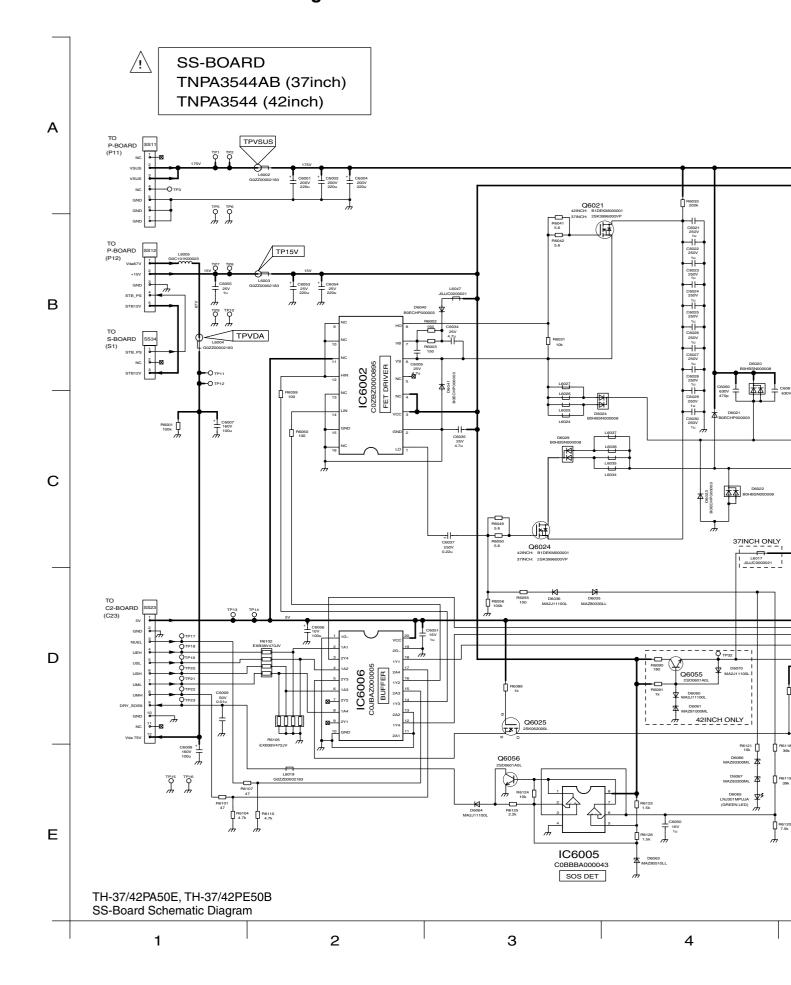

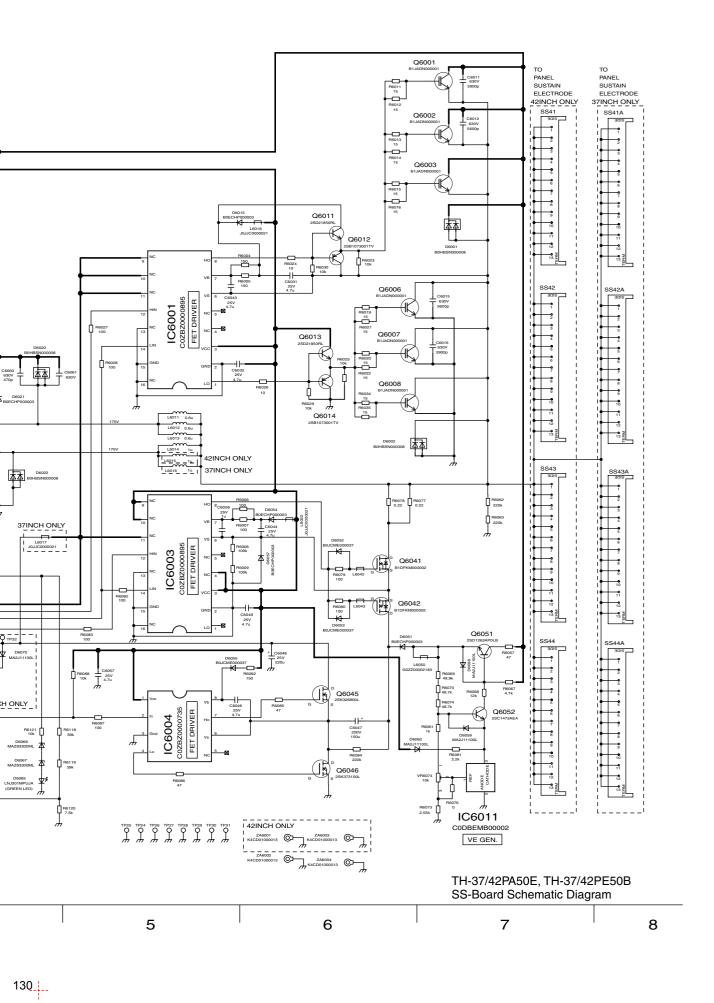

# 15 Parts Location & Mechanical Replacement Parts List

# 15.1 Parts Location



# 15.2 Packing Exploded Views (1)



# 15.3 Packing Exploded Views (2)



# 15.4 Packing Exploded Views (3)



# 15.5 Mechanical Replacement Parts List

#### Note:

All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by AVC-SPC. Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
1	EAS12S08A	SPEAKER	2	
2	EUR7651060	REMOTE CONTROL	1	TH-37/42PA50E PAVCCZ
2	EUR7651070	REMOTE CONTROL	1	TH-37/42PE50B PAVCCZ
	J0KD00000095	FLAT CORE	2	
	J2ZZ00000054	RF-CABLE	1	TH-37/42PE50B PAVCCZ
	K1YD55000001	CONNECTOR	2	
3	K2AH3H000033	AC-INLET	1	PAVCCZ 🛆
4	K2CN3DH00006	AC CORD	1	TH-37/42PA50E △
4	K2CT3DH00018	AC CORD(B/H)	1	TH-37/42PE50B △
5	MD42S08A1J	PLASMA DISPLAY PANEL	1	42 INCH △
5	MD37S08A1J	PLASMA DISPLAY PANEL	1	37 INCH PAVCCZ △
	TBMA149	PANASONIC BADGE (SILVER)	1	
6	TBXA46302	POWER BUTTON	1	
7	TBXA46402	5KEYS BUTTON	1	
	TES4G204	SPRING	1	
	THEL0239	SCREW(SLOT5, METAL4, COVER3)	1	
	THEL027N	SCREW	4	

I	TUEL COEN	loopsw	ا م	la mou
	THEL035N	SCREW	+	42 INCH
	THEL035N	SCREW	_	37 INCH
	THEL0429	SCREW	23	
	THEL0439	SCREW(FLOCK)	4	
	THTA0379	SCREW	2	PAVCCZ
8	TKGA5197	FRONT GLASS	1	TH-37PE50B PAVCCZ
8	TKGA5217	FRONT GLASS	1	42 INCH PAVCCZ
8	TKGA5219	FRONT GLASS	1	TH-37PA50E PAVCCZ
9	TKKC5208	PANEL LIGHT	1	TH-37/42PA50E PAVCCZ
9	TKKC5212	PANEL LIGHT	1	TH-37/42PE50B PAVCCZ
10	TKKL5231	COVER	4	
11	TKKL5306	ADJUSTMENT COVER(SMALL)	1	
12	TKKL5330	ADJUSTMENT COVER(LARGE)	1	
13	TKPA94301	INLET COVER	1	
14	TKRA34802	B/COVER HANDLE	2	37 INCH
14	TKRA46201	B/COVER HANDLE	2	42 INCH
	TMK0E718	SPEAKER SPONGE	2	PAVCCZ
	TMKG288	CUSHION(TKG/UPPER/BOTTOM)	2	42 INCH
	TMKG308	CUSHION(TKG/UPPER/BOTTOM)	2	37 INCH
	TMKG289	CUSHION(TKG/LEFT/RIGHT)	2	42 INCH
	TMKG309	CUSHION(TKG/LEFT/RIGHT)	2	37 INCH
	TMM15414-2	CLAMPER	2	TH-42PE50B
	TMM17499	CLAMPER	1	
	TMM25401	CLAMPER	6	
	TMM7464-2	CLAMPER	2	
	TMM7468-1	CLAMPER	3	
	TMME047	CLAMPER	6	
	TMME061	CLAMPER	5	
	TMME075	EADG SADOLE		42 INCH
	TMME075	EADG SADOLE	9	37 INCH
	TMME190	CLAMPER	1	TH-37/42PA50E
	TMME190	CLAMPER	2	TH-37/42PE50B
	TMME206	CLAMPER	2	111-317-21 2305
	TMME226	CLAMPER	1	
	TMXX028	CORE HOLDER	1	37 INCH
	TMZX5050	STAND BRACKET	1	37 INCH
15			_	42 INCH DAVICCZ
15	TPC0E62601	CARTON BOTTOM		42 INCH PAVCCZ
16	TPC0E62701	CARTON	1	42 INCH PAVCCZ △
15	TPC0E62801	CARTON BOTTOM	1	37 INCH PAVCCZ
16	TPC0E62901	CARTON	1	37 INCH PAVCCZ 🛆
17	TPD0E0088	CUSHION TOP	1	PAVCCZ
18	TPD0E0089	CUSHION BOTTOM	1	PAVCCZ
19	TPD0E9012	TOP PAD	1	42 INCH PAVCCZ
19	TPD0E9013	TOP PAD	1	37 INCH PAVCCZ
20	TPD169487	JOINT	4	
21	TPDF1197	ACCESSORIES BOX	1	
22	TPE0E4010	PROTECT COVER	1	PAVCCZ
23	TPE0E4013	TOP PROTECT SHEET	1	PAVCCZ
	TQA0E1067	ITALIAN SCHEMATIC DIAGRAM	1	TH-37/42PA50E PAVCCZ
24	TQB0E0167A	INSTRUCTION BOOK(GER0AN)	1	TH-37/42PA50E PAVCCZ 🛆
<del>24</del> 24			+	
	TQB0E0167B	INSTRUCTION BOOK(DUTCH)	1	TH-37/42PA50E PAVCCZ
24	TQB0E0167C	INSTRUCTION BOOK(ITALIAN)	1	TH-37/42PA50E PAVCCZ 🛆
24	TQB0E0167D	INSTRUCTION BOOK(FRENCH)	1	TH-37/42PA50E PAVCCZ △
	TQB0E0167E	INSTRUCTION BOOK(SPANISH)	1	TH-37/42PA50E PAVCCZ
24				3.7 121 71002 1 717 002 —
		INSTRUCTION ROOK(SWEDISH)	1	TH STASDAEDE DAVIDOR A
24 24	TQB0E0167F	INSTRUCTION BOOK(SWEDISH)	1	
		INSTRUCTION BOOK(SWEDISH) INSTRUCTION BOOK(DANISH) INSTRUCTION BOOK(BULGARIA)	1	TH-37/42PA50E PAVCCZ A TH-37/42PA50E PAVCCZ A TH-37/42PA50E PAVCCZ A

24	TQB0E0167N	INSTRUCTION BOOK(ROMANIAN)	1	TH-37/42PA50E PAVCCZ △
24	TQB0E0167P	INSTRUCTION BOOK(POLISH)	1	TH-37/42PA50E PAVCCZ △
24	TQB0E0167Q	INSTRUCTION BOOK(HUNGARRI)	1	TH-37/42PA50E PAVCCZ △
24	TQB0E0167R	INSTRUCTION BOOK(CZECH)	1	TH-37/42PA50E PAVCCZ A
24	TQB0E0167U	INSTRUCTION BOOK(ENGLISH)	1	TH-37/42PA50E PAVCCZ <b>A</b>
24	TQB0E0168	INSTRUCTION BOOK(ENGLISH)	1	TH-37/42PE50B PAVCCZ A
	TSXL436	CABLE DG1-H1/DG2-H2	2	TIT-37/42FE30B FAVCCZ
	TSXL438	CABLE PA30-H30	2	
	TSXL440	CABLE (D33-C21/D34-C11)	2	
	TSXL460	CABLE Z50-H50	1	
25	TTEA0235	ESCUTCHEON	1	TH-42PA50E PAVCCZ 🛆
25	TTEA0236	ESCUTCHEON	1	TH-42PE50B PAVCCZ
25	TTEA0255	ESCUTCHEON	1	TH-37PA50E PAVCCZ A
25	TTEA0256	ESCUTCHEON	1	TH-37PE50B PAVCCZ A
26	TTUA1108	REAR COVER	1	TH-42PA50E PAVCCZ
			1	
26	TTUA1109	REAR COVER	<u> </u>	TH-42PE50B PAVCCZ 🛆
26	TTUA1118	REAR COVER	1	TH-37PA50E PAVCCZ 🛆
26	TTUA1119	REAR COVER	1	TH-37PE50B PAVCCZ △
27	TXFMZ01YFSUA	STAND BLOCK A'SSY	2	
	TXJ/SWYFSU	SPEAKER REED	2	
	XTB3+10GFJ	SCREW	4	
	XTB4+12GFJ	SCREW		TH-42PA50E
	XTB4+12GFJ	SCREW		TH-42PE50B
	XTB4+12GFJ	SCREW	33	37 INCH
	XTB4+12GFJK	SCREW	1	
	XTB4+15AFJK	SCREW	15	
	XTV3+10JFJK	SCREW(HDMI)	6	
	XTW4+35DFJ	SCREW	10	
	XYC4+FJ35FJK	SCREW	8	
	XYN3+F6FJ	SCREW(LCD PANEL FIX META)	1	
	XYN3+F8FJ	SCREW	32	TH-37/42PA50E
	XYN3+F8FJ	SCREW	39	TH-37/42PE50B
	XYN3+J10FJ	SCREW	1	
	XYN3+J12FJ	SCREW	23	
	XYN3+J8FJ	SCREW ROHS	2	
	XYN4+E8FJ	SCREW(EARTH)	1	
	XYN5+C15FJ	SCREW	8	
	XZBT6530	POLY BAG	1	

# 16 Electrical Replacement Parts List

# 16.1 Replacement Parts List Notes

#### Important Safety Notice

Components identified by Amark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

#### RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.

After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor 2. Capacitor
Example: Example:

ERD25TJ104 <u>C</u> 100KOHM, <u>J</u>, 1/4W ECKF1H103ZF <u>C</u> 0.01UF, <u>Z</u>, 50V

Type Allowance Type Allowance

Туре	Allowance		
C : Carbon F : Fuse M : Metal Oxide Metal FIlm S : Solid W : Wire Wound	F:±1% G:±2% J:±5% K:±10% M:±20%		

Type	Allowance
C : Ceramic E : Electrolytic P : Polyester Polyprop lene T : Tantalum	C: ±0.25pF D: ±0.5pF F: ±1pF G: ±3pF J: ±5pF K: ±10pF L: ±15pF M: ±20pF P: +100%, -0% Z: +80%, -20%

# 16.2 Electrical Replacement Parts List

#### Note:

All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by AVC-SPC. Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C001	ECA0JM102	E 1000UF, 6.3V	1	
C002,03	ECA1HM100	E 10UF, 50V	2	
C006	ECJ1XC1H220J	C 22PF, J, 50V	1	
C007	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C009	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C11	K1MN55BA0076	55P CONNECTOR	1	

ı				
C12	<u> </u>	4P CONNECTOR	1	
C1MM2	TMME199	CLAMPER	1	
C013	ECJ1XF1C104Z		1	
C016	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C017	ECJ3VB1C474K	C 0.47UF, K, 16V	1	
C018,19	ECJ1XC1H330J	C 33PF, J, 50V	2	
C020	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C021	ECJ1XC1H101J	C 100PF, J, 50V	1	
C21	K1MN55BA0076	55P CONNECTOR	1	
C022	ECJ3YB0J335K	C 33UF, J, 25V	1	
C22	K1KA04BA0107	4P CONNECTOR	1	
C023	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C23	K1KA12AA0153	12P CONNECTOR	1	
C024	ECJ1XC1H221J	C 220PF, J, 50V	1	
C1100	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1101,02	ECJ1XB1C104K		2	
C1104	ECJ1XB1C104K		1	
	ECJ1XB0J105K		2	
C1107	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1108-11	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C1112	EEEHB1C100R	C 10PF, J, 16V	1	
C1113,14	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1115	EEEHB0G101R	C 100PF, J, 4V	1	
C1116	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1117-19	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C1120	EEEHB0G101R	C 100PF, J, 4V	1	
C1122	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1123,24	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1125	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C1126	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1127	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1128,29	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1130	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1131	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1132	EEEHB1C100R	C 10PF, J, 16V	1	
C1133,34	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C1135	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C1136-39	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C1140	EEEHB1E330P	C 33PF, J, 25V	1	
C1141	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1150	EEEHB1E330P	C 33PF, J, 25V	1	
C1152	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1153,54	ECJ1VB1H221K	C 220UF, K, 50V	2	
C1155	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1170	EEVHP1C100R	E 10UF, 16V	1	
C1171	EEEHB1C470P	C 47PF, J, 16V	1	
C1172	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1174	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1175	ECJ1XC1H151J	C 150PF, J, 50V	1	
C1178	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1181,82	EEEHB0G101R	C 100PF, J, 4V	2	
C1186	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1187	ECJ1XC1H180J	C 18PF, J, 50V	1	
C1188	ECJ1XC1H220J	C 22PF, J, 50V	1	
C1193	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1194	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C1195	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1196-98	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C1200,01	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
H,	+	. , -		

C1202	EEEHB0G101R	C 100PF, J, 4V	1	
C1203	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C1204	ECJ1XB0J105K	C 1UF, K, 16V	1	
C1205,06	ECJ1XC1H271J	C 270PF, J, 50V	2	
C1207	ECJ1XB1C104K		1	
C1208		C 270PF, J, 50V	1	
C1209	EEEHB0G101R	C 100PF, J, 4V	1	
C1211		C 0.1UF, Z, 16V	1	
	ECJ1XC1H271J	C 270PF, J, 50V	2	
	ECJ1XB1C104K		3	
	ECJ1XC1H271J		2	
C1219	ECJ1VF1H103Z		1	
C1220,21	ECJ1XC1H101J		2	
C1222	ECJ1VB1C105K		1	
C1223-25	ECJ1XC1H680J	C 68PF, J, 50V	3	
C2005-18	ECJ1XC1H561J	C 560PF, J, 50V	14	
C2003-16	ECA1CM221	E 220UF, 16V	1	
C2019	ECA1HM220	E 22UF, 50V	1	
		·	2	
		C 560PF, J, 50V		TH 27/42DEE0D
C2101,02	ECJ2VF1C104Z	C 0.1UF, Z, 16V		TH-37/42PE50B
	<del> </del>	C 10UF, M,6.3V	2	TH 07/40DE 50D
	ECJ2FB1C105K	C 1UF, Z, 16V		TH-37/42PE50B
C2111	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2116	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2118,19	ECEA1CN470U	E 47UF, 16V	2	
C2120,21	ECJ2XB1A105K	C 1UF, K, 10V		TH-37/42PE50B
C2122,23	ECJ3YB1A106M	C 10UF, M,6.3V	2	
C2124		C 1.0UF, K, 16V	1	
C2125,26	ECJ1VB1H102K	C 1000PF, K, 50V	2	
C2127	ECA1CMH101	E 100UF, 16V	1	
C2128	ECJ2VF1C104Z		1	
	F1J1A1050002	C 1UF, Z, 50V	2	
C2131	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2132	ECA1HM100	E 10UF, 50V	1	
C2133,34	ECJ1XC1H470J	C 47PF, J, 50V	2	
C2143	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C2144,45	ECJ3YB1A106M	C 10UF, M,6.3V	2	
C2146	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2147	ECA1HM220	E 22UF, 50V	1	
C2148-50	ECJ2FB1C105K	C 1UF, Z, 16V	3	
C2151	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	TH-37/42PA50E
C2152	ECJ2FB1C105K	C 1UF, Z, 16V	1	
C2153	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C2154	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2156	ECJ3YB1A106M	C 10UF, M,6.3V	1	
C2158	ECJ3YB1A106M	C 10UF, M,6.3V	1	
C2159,60	ECJ2FB1C105K	C 1UF, Z, 16V	2	
C2161	ECA1CMH101	E 100UF, 16V	1	
C2162-65	ECJ2FB1C105K	C 1UF, Z, 16V	4	
C2166-67	ECJ2FB1C105K	C 1UF, Z, 16V	2	TH-37/42PE50B
C2172	ECJ1VB1H102K	C 1000PF, K, 50V	1	017 121 2005
C2173	ECJ1VB1H102K	C 0.01UF, K, 50V	1	
C2173	ECJ1VB1H103K	C 1000PF, K, 50V	1	
C2174 C2175-77	ECJ1VB1H102K		3	
-	<u> </u>	C 0.01UF, K, 50V		
C2178,79	ECA1HM100	E 10UF, 50V	2	
C2181	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2183	ECA1HM3R3	E 3.3UF, 50V	1	
C2184,85	ECJ2VF1C104Z	C 0.1UF, Z, 16V	2	
C2189,90	ECJ2FB1C105K	C 1UF, Z, 16V	2	

C2191	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2192	ECA1HM100	E 10UF, 50V	1	
C2193,94	ECJ2FB1C105K	C 1UF, Z, 16V	2	TH-37/42PA50E
C2195	ECJ1XC1H470J	C 47PF, J, 50V	1	
C2196	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2198	ECA1CMH101	E 100UF, 16V	1	
C2199	ECJ1VC1H560J	C 56PF, J, 50V	1	
C2200	ECJ1XC1H470J	C 47PF, J, 50V	1	
C2201,02		C 5PF, C, 50V	2	
C2203	ECJ1VC1H100C		1	
C2204	ECJ1XC1H220J		1	
C2206	ECA1CMH101	E 100UF, 16V	1	
C2207	ECJ2VF1C104Z		1	
C2208	ECJ1XF1C104Z		_	TH-37/42PA50E
C2211	ECJ1VB1C104K		1	111 077 421 7 GOL
C2212	ECJ1XF1C104Z		<u> </u>	I TH-37/42PA50E
C2213	ECJ1VB1C104K	C 0.1UF, K, 16V	-	TH-37/42PA50E
C2213	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-37/42PE50B
C2213			1	I II - 37/42 P E 30 B
	ECJ1VB1H102K	C 1000PF, K, 50V	-	
C2215	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2218-21	ECJ3YB1A106M	C 10UF, M,6.3V	4	
C2222	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2223	ECJ1XC1H390J	C 39PF, J, 50V	1	
C2225	ECJ2FB1C105K	C 1UF, Z, 16V	1	
C2226	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C2300,01	ECJ1VF1H104Z	C 0.1UF, Z, 50V	2	
C2305	ECA1CMH101	E 100UF, 16V	1	
C2306	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C2307	ECA1CMH101	E 100UF, 16V	1	
C2308,09	ECJ1VB1H103K	C 0.01UF, K, 50V	2	
C2310,11	ECJ3YB1A475K	C 0.047UF, K, 10V	2	
C2314	ECJ1VB1H562K	C 5600PF, K, 50V	1	
C2315	ECA1CHG470	E 47UF, 16V	1	
C2316	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2318	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2319	ECJ1XC1H471J	C 470PF, J, 50V	1	
C2320	ECJ1VB1E473K	C 0.47UF, K, 25V	1	
C2322	ECJ1XC1H471J	C 470PF, J, 50V	1	
C2323	ECJ1VB1E473K	C 0.47UF, K, 25V	1	
C2324	ECJ1XC1H471J	C 470PF, J, 50V	1	
C2325	ECJ1VB1E473K	C 0.47UF, K, 25V	1	
C2327	ECJ1XC1H471J	C 470PF, J, 50V	1	
C2328	ECJ1VB1E473K	C 0.47UF, K, 25V	1	
C2329-32	ECJ1VB1H332K	C 3300PF, K, 50V	4	
C2358	ECA1CMH101	E 100UF, 16V	1	
C2359	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C2372	ECA1HHG100	E 10UF, 50V	1	
C2372		E 10UF, 50V	1	
	ECA1HHG100		<del>-</del>	
C2376-79	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2384-87	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2428,29	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C2430	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2433,34	ECJ2FB1C474K	C 0.47UF, Z, 16V	2	
C2437,38	ECJ2FB1C474K	C 0.47UF, Z, 16V	2	
C2441,42	ECJ1XC1H221J	C 220PF, J, 50V	2	
C2445,46	ECJ2FB1E105K	C 1UF, K, 16V	2	
C2449,50	ECA1EHG331	E 330UF, 25V	2	
C2453,54	ECJ2FB1E105K	C 1UF, K, 16V	2	
C2457,58	ECJ2FB1E105K	C 1UF, K, 16V	2	
1				

i				_
C2461,62	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2465,66	ECJ2FB1E105K	C 1UF, K, 16V	2	
C2469,70	ECJ2FB1E105K	C 1UF, K, 16V	2	
C2473,74	ECJ2FB1E105K	C 1UF, K, 16V	2	
C2477,78	ECJ2FB1E105K	C 1UF, K, 16V	2	
C2481-84	ECJ2FB1E224K	C 22UF, K, 16V	4	
C2489,90	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2497,98	ECJ2FB1E105K	C 1UF, K, 16V	2	
C2512	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C2515	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C2517	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C3001-03	ECJ1VB1H102K	C 1000PF, K, 50V	3	
C3004	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3005-07	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
C3008,09	F1J1A1050002	C 1UF, Z, 50V	2	
C3011	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
	F1J1A1050002	C 1UF, Z, 50V	2	
C3015	ECJ2VF1C104Z		1	
C3018	ECJ3YB1A106M		1	
C3019-21	F1J1A1050002	C 1UF, Z, 50V	3	
C3024-26	F1J1A1050002	C 1UF, Z, 50V	3	
C3032	ECJ2XB1A105K	C 1UF, K, 10V	1	
C3033	F1J1A1050002	C 1UF, Z, 50V	1	
C3035,36	F1J1A1050002	C 1UF, Z, 50V	2	
C3033,30	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3040	ECJ2VF1C104Z ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3040	F1J1A1050002	C 1UF, Z, 50V	1	
C3043	<del> </del>	C 0.1UF, Z, 16V	1	
	ECJ2VF1C104Z			TH-37/42PE50B
C3045	F1J1A1050002	C 1UF, Z, 50V	1	TH-37/42PE30B
C3047	F1J1A1050002 F1J1A1050002	C 1UF, Z, 50V	<u> </u>	
C3049-56	<b>+</b>	C 1UF, Z, 50V	8	
C3058	ECA1CMH101	E 100UF, 16V	<u> </u>	
C3059	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3060	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3062-64	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
C3207		E 1000UF, 10V	1	
C3208		C 0.47UF, K, 16V	1	
C3212	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3214	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C3216	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C3226-29	ECJ2FF1A106Z	C 0.001UF, Z, 10V	4	
C3230	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3231	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3233	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3235	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C3236	ECA1HM100	E 10UF, 50V	1	
C3241	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C4001	EEVHB0G221P	E 220UF, 4V	1	
C4002	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4003	EEFCD0G560R	56UF,	1	
C4004	ECJ2YB0J225K	C 2.2UF, K, 6.3V	1	
C4005	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4006	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4014,15	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4016	ECJ1VC1H680J		1	
C4018	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4019	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C4020	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C4023,24	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
1	•	<del>!</del>		ł

C4025		E 47UF, 6.3V	1	
C4026	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4027	EEEHB1E330P	C 33PF, J, 25V	1	
C4028,29	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C4030	EEEHB1C100R	C 10PF, J, 16V	1	
C4031-33	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4035	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4036	EEVHB0J470R	E 47UF, 6.3V	1	
C4037	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4038,39	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4043-45	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4047		C 100PF, J, 50V	1	
C4048	ECJ1XB1C104K		1	
C4049		C 0.01UF, K, 50V	1	
C4050	ECJ1XB1C104K		1	
C4051		C 1000PF, J, 50V	1	
C4052	ECJ1XB0J105K		1	
C4053,54	ECJ1XB1C104K		2	
C4055	ECJ1XB1C823K			PAVCCZ
C4056	ECJ1VB1H103K		1	
C4057,58	ECJ2VB1C104K		2	
C4059	EEVHB0J470R	E 47UF, 6.3V	1	
C4060	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4061	EEVHB0J470R	E 47UF, 6.3V	1	
C4062	ECJ1XB1C104K		1	
C4063-65	ECJ2VB1C104K		3	
C4066	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4070	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4072	ECJ2YB0J225K	C 2.2UF, K, 6.3V	1	
C4100-02	ECJ3XB0J106M	C 10UF, M,6.3V	3	
C4103	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4104		C 0.01UF, K, 16V	1	
C4105		C 0.01UF, K, 50V	1	
C4106		C 0.01UF, K, 16V	1	
C4107		C 0.01UF, K, 50V	1	
C4107		C 0.01UF, K, 16V	1	
			3	
C4115-17	ECJ3XB0J106M ECJ1XC1H390J	C 10UF, M,6.3V	3	
C4118-20 C4121,22	ł	C 39PF, J, 50V	2	
C4121,22	ECJ1XB1C104K EEEHB1A101P	C 0.1UF, Z, 16V C 100PF, J, 10V	1	
	<del></del>		1	
C4126	EEVHB0J470R	E 47UF, 6.3V	1	
C4127 C4128-31	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4132	EEEHB0G101R	C 100PF, J, 4V		
C4133	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4135	ECJ1XB0J105K	C 1UF, K, 16V	1	<u> </u>
C4136	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4151	ECJ3YB0J335K	C 33UF, J, 25V	1	
C4152	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4153-56	ECJ1VB1C105K	C 0.01UF, K, 16V	4	
C4158-66	ECJ1XC1H102J	C 1000PF, J, 50V	9	
C4167	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4168	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C4170-72	ECJ1VB1H103K	C 0.01UF, K, 50V	3	
C4176	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4177,78	ECJ1VB1C105K	C 0.01UF, K, 16V	2	
C4179	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4180	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4181	ECJ3XB0J106M	C 10UF, M,6.3V	1	
•				

C4182	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4233	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4234	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4235	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4351	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4501	EEVHB0J470R	E 47UF, 6.3V	1	
C4502,03	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4504	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4505	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4506	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4507	ECJ1XB1C104K		1	
C4508		C 0.01UF, K, 16V	1	
C4509	ECJ1XB1C104K		1	
C4510		C 0.01UF, K, 16V	1	
C4511	ECJ1XB1C104K		1	
C4512		C 0.01UF, K, 16V	1	
C4513	ECJ1XB1C104K		1	
C4514	EEVHB0J470R	E 47UF, 6.3V	1	
C4515	ECJ1XB1C104K		1	
C4516-18		C 0.01UF, K, 16V	3	
C4519	ECJ1XB1C104K		1	
C4521	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4522-24	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4525	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4525			1	
C4527,28	1	C 1UF, K, 16V	2	
	ECJ1XB0J105K		1	
C4529	ECJ1VB1C105K	C 0.01UF, K, 16V		
C4530-34	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4535	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4536	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4537	EEVHB0J470R	E 47UF, 6.3V	1	
C4538-51	ECJ1XB1C104K		14	
C4552,53		C 0.01UF, K, 16V	2	
C4554-56	ECJ1XB1C104K		3	
C4560,61		C 0.01UF, K, 50V	2	
	ECJ1XB0J105K		1	
C4565-68	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4570-74	ECJ1XC1H102J	C 1000PF, J, 50V	5	
C4575	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4576-81	ECJ1XC1H102J	C 1000PF, J, 50V	6	
C4582	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4583-95	ECJ1XC1H102J	C 1000PF, J, 50V	13	
C4596	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4597	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4598	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4599,00	ECJ1XB0J105K	C 1UF, K, 16V	2	
C4601	EEEHB0J330R	C 33PF, J, 6.3V	1	
C4602	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4605	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4607-10	ECJ1VB1H103K	C 0.01UF, K, 50V	4	
C4611	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C4612	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4613	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4701	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4702	EEFCD0G560R	56UF,	1	
C4703	EEEHB0J220R	C 22PF, J, 6.3V	1	
C4704	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4709	EEVHB0J470R	E 47UF, 6.3V	1	
C4710,11	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
· · · · · ·	+	+		

ı				_
C4712		C 0.01UF, K, 16V	1	
C4713	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4714	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C4715	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4716	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C4717	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4718	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C4719-22	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4723	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C4724	ECJ1XB1C104K		1	
C4725		C 0.01UF, K, 16V	1	
C4726	ECJ1XB1C104K		1	
C4727		C 0.01UF, K, 16V	1	
C4728	ECJ1XB1C104K		1	
C4729		C 0.01UF, K, 16V	1	
C4730	ECJ1XB1C104K		1	
C4731		C 0.01UF, K, 16V	1	
C4732	ECJ1XB1C104K		1	
C4733		C 0.01UF, K, 16V	1	
C4734	ECJ1XB1C104K		1	
C4735	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
C4736	ECJ1XB1C103K	C 0.1UF, Z, 16V	1	
C4737	ECJ1VB1C103K	C 0.01UF, K, 16V	1	
	<del></del>		2	
C4855,56	ECJ1XB1C104K	C 0.1UF, Z, 16V	_	
C4858	EEVHB0G221P	E 220UF, 4V	1	
C4859	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4861	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4863	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4864	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C4867,68	ECJ1XC1H101J	C 100PF, J, 50V	2	
C4873	EEVHB0J470R	E 47UF, 6.3V	1	
C4874		C 0.1UF, Z, 16V	1	
C4875,76	ECJ2VB1C104K		2	
C4877	ECJ2XB1A105K		1	
C4878,79	ECJ2VB1C104K		2	
	ECJ2XB1A105K		1	
C4881	ECJ1XC1H101J	C 100PF, J, 50V		TH-37/42PE50B
C4882		C 0.01UF, K, 50V	1	
C4883	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4892	EEVHB0J470R	E 47UF, 6.3V	1	
C4893	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4898	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4899	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4901	EEEHB1C100R	C 10PF, J, 16V	1	
C4902	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C4903	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4904	EEEHB1C470P	C 47PF, J, 16V	1	
C4905	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4922	EEVHB0J470R	E 47UF, 6.3V	1	
C4924	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4925	EEEHB1C470P	C 47PF, J, 16V	1	
C4926	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C4929	EEEHB1C100R	C 10PF, J, 16V	1	
C4939	EEVHB0G221P	E 220UF, 4V	1	
C4942	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4943	EEEHB1C470P	C 47PF, J, 16V	1	
C4945-48	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4952	ECJ1XC1H101J	C 100PF, J, 50V	1	
C5601	ECA1HM220	E 22UF, 50V	1	
	+	, , , , , , , , , , , , , , , , , , ,		

ı				
C5604	ECA1HHG100	E 10UF, 50V	1	
C5605	EEUFC1E102	E 1000UF, 25V	1	
C5606	EEUFC1C821	E 820UF, 16V	1	
C5608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	EEUFC1E102	E 1000UF, 25V	1	
C5612	EEUFC1C821	E 820UF, 16V	1	
C5613	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5616	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5617	EEUFC1C821	E 820UF, 16V	1	
C5618,19	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C5622	EEUFC1C821	E 820UF, 16V	1	
C5623	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5626	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C5631	EEUFC1C102	E 1000UF, 16V	1	
C5637		C 0.47UF, Z, 16V	1	
C5641-44	ECJ2VF1C104Z		4	
C5670	ECJ2XB1E104K		1	
C5672	ECA1HM220	E 22UF, 50V	1	
C5673	ļ.	C 0.01UF, K, 50V	1	
C5685	ECA1HHG100	E 10UF, 50V	1	
C5686	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5813	ECJ2XB1F104K	C 0.1UF, K, 25V	1	
C5818	ECA1CM471	E 470UF, 16V	1	
-	1		1	
C5820	ECA1CM102	E 1000UF, 16V	1	
C5821 C5823	ECJ2XB1E104K	C 0.1UF, K, 25V		
	ECA1CM222	E 2200UF, 16V	1	
C6001-03	F2A2D221A022	E 220UF, 200V	3	
C6005	F1L1E4750004	C 4.7UF, 25V	1	
C6007,08	ECA2CM101	E 100UF, 160V	2	
C6009	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6011	F1L2J392A022	C 3900UF, K,6.3V	1	
C6012	F1L2J562A022	C 5600UF, K,6.3V	1	
C6016	F1L2J392A022	C 3900UF, K,6.3V	1	
C6017	F1L2J562A022	C 5600UF, K,6.3V	1	
		P 1UF, 250V	10	
C6031,32	F1L1E4750004	C 4.7UF, 25V	2	
C6034,35	F1L1E4750004	C 4.7UF, 25V	2	
C6037	ECQE2224KF	P 0.22UF, K,250V	1	
C6043,44	F1L1E4750004	C 4.7UF, 25V	2	
C6046	F1L1E4750004	C 4.7UF, 25V	1	
C6047	F2A2D1510004	E 150UF, 200V	1	
C6048	EEUFC1E221	E 220UF, 25V	1	
C6049	F1L1E4750004	C 4.7UF, 25V	1	
C6050,51	TCUY1C105ZFN	C 1UF, 16V	2	
C6053,54	EEUFC1E221	E 220UF, 25V	2	
C6055	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6056	EEUFC1A101	E 100UF, 10V	1	
C6057	F1L1E4750004	C 4.7UF, 25V	1	
C6058	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6060,61	F1K2J471A014	C 470UF, K,6.3V	2	
C6456	ECA2CM101	E 100UF, 160V	1	
C6457	ECA2CHG100	E 10UF, 160V	1	
C6458	F1L1E4750004	C 4.7UF, 25V	1	
C6459	EEUFC1E470	E 47UF, 25V	1	
C6461	ECA1HM101	E 100UF, 50V	1	
C6462-65	F1L1E4750004	C 4.7UF, 25V	4	
C6466	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6467	ECJ2XB1H472K	C 4700PF, K, 50V	1	
F			<u> </u>	

1	1		
C6468	TCUY1C105ZFN		1
C6469	EEUFC1E221	E 220UF, 25V	1
C6470	ECA1HM221	E 220UF, 50V	1
C6471	TCUY1C105ZFN	C 1UF, 16V	1
C6472	ECJ2VB1H333K	C 0.033UF, K, 50V	1
C6473	TCUY1C105ZFN	C 1UF, 16V	1
C6474	ECJ2XB1H103K	C 0.01UF, K, 50V	1
C6475	EEUFC1E221	E 220UF, 25V	1
C6476	ECA2CM101	E 100UF, 160V	1
C6478	ECJ2XB1H103K	C 0.01UF, K, 50V	1
C6479,80	ECJ2XB1H104K	C 0.1UF, K, 50V	2
C6490	F1K2J332A014	C 3300UF, K,6.3V	1
C6491,92	F2A2G100A017	E 100UF, 400V	2
C6493	ECJ3XB2J222K	C 2200PF, K,630V	1
C6501-03	ECJ2XB1H104K		3
C6505	ECJ2XB1H104K		1
C6507	ECJ2XB1H104K		1
C6509		C 1000PF, J, 50V	1
C6511,12	F1L1E4750004	C 4.7UF, 25V	2
C6513	ECA2CM101	E 100UF, 160V	1
C6521	F1L1E4750004	C 4.7UF, 25V	1
C6523	ECA1VM470	E 47UF, 35V	1
C6524	F1K2J471A014	C 470UF, K,6.3V	1
C6526	ECA2EHG220	E 22UF, 250V	1
-	F1K2J471A014	C 470UF, K,6.3V	2
	F1L1E4750004	C 4.7UF, 25V	2
C6533,34	F1K2J471A014	C 470UF, K,6.3V	2
C6533,34	F1L1E4750004	C 4.7UF, 25V	1
C6543,44	F1K2J102A014	C 1000PF,	2
C6546	TCUY1C105ZFN		1
C6550	ECA2CM101	E 100UF, 160V	1
C6551	ECQE2224KF	P 0.22UF, K,250V	1
C6571	ECJ2XB1H104K		1
C6575	ECJ2XB1H104K		1
C6577	ECJ2XB1H104K		1
C6580,81	TCUY1C105ZFN		2
C6584	ECJ3YB1E105K		1
C6585	TCUY1C105ZFN		1
C6587	ECJ3YB1E105K		1
C6588	TCUY1C105ZFN		1
C6589	F1L1E4750004	C 4.7UF, 25V	1
C6590	TCUY1C105ZFN	1	1
C6591	F1L1E4750004	C 4.7UF, 25V	1
C6598	ECA1CM220	E 22UF, 16V	1
C6601-03	F2A2D221A022	E 220UF, 200V	3
C6607	ECJ3YB1E105K	C 1UF, K, 25V	1
C6608	ECA1EM471	E 470UF, 25V	1
C6611	F1L2J392A022	C 3900UF, K,6.3V	1
C6612	F1L2J562A022	C 5600UF, K,6.3V	1
C6615	F1L2J562A022	C 5600UF, K,6.3V	1
C6616	F1L2J392A022	C 3900UF, K,6.3V	1
C6617	F1L2J562A022	C 5600UF, K,6.3V	1
C6621-30	ECQE2105RKB	P 1UF, 250V	10
C6631,32	F1L1E4750004	C 4.7UF, 25V	2
C6634,35	F1L1E4750004	C 4.7UF, 25V	2
C6637	F1L1E4750004	C 4.7UF, 25V	1
C6639	F1L1E4750004	C 4.7UF, 25V	1
C6647	TCUY1C105ZFN	C 1UF, 16V	1
C6650	ECQE2224KF	P 0.22UF, K,250V	1
<del></del>	// //		<del>                                     </del>

ı				
C6651,52	ECJ2XB1H103K		2	
C6655,56	EEUFC1A101	E 100UF, 10V	2	
C6659,60	F1K2J471A014	C 470UF, K,6.3V	2	
C6901-04	TCUY1C105ZFN	C 1UF, 16V	4	
C6911,12	ECJ2XB1H102K	C 1000PF, K, 50V	2	
C6917	ECJ2XB1H221K	C 220PF, K, 50V	1	
C6931	F1L2E1040002	E 1000UF, 25V	1	
C6933	F1L2E1040002	E 1000UF, 25V	1	
C6955-58	TCUY1C105ZFN	C 1UF, 16V	4	
C6971,72	ECJ2XB1H102K	C 1000PF, K, 50V	2	
C6977	F1L2E1040002	E 1000UF, 25V	1	
C6979	F1L2E1040002	E 1000UF, 25V	1	
C7101	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7104-06	TCUY1C105ZFN	C 1UF, 16V	3	
C7108-10	TCUY1C105ZFN	C 1UF, 16V	3	
C7135	ECJ1XB1C104K		1	
C7137	ECJ1XB1C104K		1	37 INCH
C7138,39	ECJ1XB1C104K			42 INCH
C7140	ECJ1XB1C104K		_	37 INCH
C7153	ECJ1XC1H101J		1	
C7161	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7163	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7165	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7182	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7186	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7201	ECJ1XB1C104K		1	
C7201	TCUY1C105ZFN		4	
	TCUY1C105ZFN		2	
C7208,09		*		27 INICI I
C7210,11	ECJ1XC1H220J	C 22PF, J, 50V		37 INCH 42 INCH
C7218	TCUY1C105ZFN		1	42 INCH
C7219	TCUY1C105ZFN		_	
C7222	TCUY1C105ZFN		1	07 [N]OLL
C7223	TCUY1C105ZFN			37 INCH
C7226,27	ECJ1XC1H220J			42 INCH
C7235	ECJ1XB1C104K		1	
C7237	ECJ1XB1C104K	i	1	
C7239	ECJ1XB1C104K		1	
C7242	TCUY1C105ZFN		1	
C7253,54	ECJ1XC1H101J	C 100PF, J, 50V	2	
C7255,56	ECJ1XC1H101J	C 100PF, J, 50V		42 INCH
C7266	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7268	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7270	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7272	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7282,83	ECJ1XC1H101J	C 100PF, J, 50V		37 INCH
C8001	ECJ0EB1C103K	C 0.01UF, K, 16V	1	TH-37/42PE50B
C8002	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-37/42PE50B
C8003	ECJ0EB1C103K	C 0.01UF, K, 16V	1	TH-37/42PE50B
C8004	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-37/42PE50B
C8005	EEEHB1C100R	C 10PF, J, 16V	1	TH-37/42PE50B
C8007	ECJ0EB1H102K	C 1000PF, K, 50V	1	TH-37/42PE50B
C8010	ECJ0EC1H010C	C 1PF, D, 50V	1	TH-37/42PE50B PAVCCZ
C8015	ECJ1VC1H080C	C 8PF, C, 50V	1	TH-37/42PE50B
C8019,20	ECJ0EB1C103K	C 0.01UF, K, 16V	2	TH-37/42PE50B
C8021	ECJ0EB1H102K	C 1000PF, K, 50V	1	TH-37/42PE50B
C8030	ECJ0EB1C103K	C 0.01UF, K, 16V	_	TH-37/42PE50B
C8034,35	ECJ1VB1C104K	C 0.1UF, K, 16V		TH-37/42PE50B
C8037	ECJ0EB1C103K	C 0.01UF, K, 16V	1	TH-37/42PE50B
C8039,40	ECJ0EB1C103K	C 0.01UF, K, 16V	2	TH-37/42PE50B
H	+	, , -	<u> </u>	

ı	1			ı
C8041	EEEHB0G101R		1	TH-37/42PE50B
C8042,43	ECJ1VC1H100C		2	TH-37/42PE50B
C8046,47	ECJ0EB1C103K	C 0.01UF, K, 16V	2	TH-37/42PE50B
C8048	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8051,52	ECJ0EB1C103K	C 0.01UF, K, 16V	2	TH-37/42PE50B
C8055	EEEHB0J470R	C 47PF, J, 6.3V	1	TH-37/42PE50B
C8056	ECJ0EB1C103K	C 0.01UF, K, 16V	1	TH-37/42PE50B
C8058-61	ECJ0EB1C103K	C 0.01UF, K, 16V	4	TH-37/42PE50B
C8071	ECJ0EC1H270J	C 270PF, K, 50V	1	TH-37/42PE50B
C8073	ECJ0EC1H270J	C 270PF, K, 50V	1	TH-37/42PE50B
C8098	ECGRL0G680R	C 68PF, J, 4V	1	TH-37/42PE50B
C8099,00	ECJ0EB1A104K	C 0.1UF, K, 10V	2	TH-37/42PE50B
C8101,02	ECJ1VB0J105K	C 1UF, K, 16V	2	TH-37/42PE50B
C8103,04	ECJ0EB1A104K	C 0.1UF, K, 10V	2	TH-37/42PE50B
C8105	EEEHB0G101R	C 100PF, J, 4V	1	TH-37/42PE50B
C8106,07	ECJ1VB0J105K	C 1UF, K, 16V	2	TH-37/42PE50B
C8108	ECJ0EB1A104K		1	TH-37/42PE50B
C8109	EEEHB0G101R	C 100PF, J, 4V		TH-37/42PE50B
C8110	ECJ0EB1A104K		_	TH-37/42PE50B
C8121	ECJ0EB1A104K			TH-37/42PE50B
C8128,29	ECJ0EB1C103K	C 0.01UF, K, 16V	2	TH-37/42PE50B
C8131	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8132	ECJ0EB1C103K	C 0.01UF, K, 16V	1	TH-37/42PE50B
C8134	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8136	ECGRL0G680R	C 68PF, J, 4V	1	TH-37/42PE50B
C8137	ECJ1VB0J334K	C 0.33UF, K, 16V	_	TH-37/42PE50B
C8138		C 0.01UF, K, 50V	_	TH-37/42PE50B
C8139	ECGRL0G680R	C 68PF, J, 4V	1	TH-37/42PE50B
C8140		C 0.1UF, K, 16V	1	TH-37/42PE50B
C8141		C 0.01UF, K, 50V	1	TH-37/42PE50B
C8141	ECJ1VB111103K		1	TH-37/42PE50B
C8142		C 0.01UF, K, 50V		TH-37/42PE50B
	ECJ0EB1A104K			TH-37/42PE50B
C8144				
C8145		C 0.01UF, K, 16V		TH-37/42PE50B
C8146	ECJ1VB1C104K			TH-37/42PE50B
C8147	<del>                                     </del>	C 0.01UF, K, 50V	_	TH-37/42PE50B
C8148	ECJ1VB1C104K			TH-37/42PE50B
C8149	ECJ1VB0J105K	C 1UF, K, 16V	1	TH-37/42PE50B
C8150		C 0.01UF, K, 50V	1	TH-37/42PE50B
C8151	ECJ1VB1C104K	C 0.1UF, K, 16V	1	TH-37/42PE50B
C8154-56	ECJ1VB1C104K	C 0.1UF, K, 16V	3	TH-37/42PE50B
C8157	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8160	ECJ1VB1C104K	C 0.1UF, K, 16V	1	TH-37/42PE50B
C8161	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8162	ECJ0EB1C103K	C 0.01UF, K, 16V	1	TH-37/42PE50B
C8163		C 0.01UF, K, 50V	1	TH-37/42PE50B
C8164	ECJ0EB1C103K	C 0.01UF, K, 16V	1	TH-37/42PE50B
C8165	ECJ1VB1C104K	C 0.1UF, K, 16V	1	TH-37/42PE50B
C8166	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8167	ECJ1VB1C104K	C 0.1UF, K, 16V	1	TH-37/42PE50B
C8168	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8169	EEEHB0G470R	C 47PF, J, 4V	1	TH-37/42PE50B
C8170,71	ECJ1VB1C104K	C 0.1UF, K, 16V	2	TH-37/42PE50B
C8172	EEEHB0G470R	C 47PF, J, 4V	1	TH-37/42PE50B
C8173-75	ECJ1VB1H103K	C 0.01UF, K, 50V	3	TH-37/42PE50B
C8176	ECJ1VB1C104K	C 0.1UF, K, 16V	1	TH-37/42PE50B
C8182	ECJ0EC1H121J	C 120PF, K, 50V	1	TH-37/42PE50B
C8186	ECJ0EC1H470J	C 470PF, K, 50V	1	TH-37/42PE50B
C8189	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-37/42PE50B
H	†	· ·		-

1	1	I	1 .	<b>.</b>
C8193	†	C 100PF, J, 6.3V	_	TH-37/42PE50B
C8194	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
C8202,03	EEEHB1C470P	C 47PF, J, 16V	2	TH-37/42PE50B
C8204	ECJ3XB1C106M		1	TH-37/42PE50B
C8205,06	ECJ1VB1C104K		2	TH-37/42PE50B
C8207	EEEHB1C470P	C 47PF, J, 16V	1	TH-37/42PE50B
C8208	ECJ3XB1C106M	C 1.0UF, K, 16V	1	TH-37/42PE50B
C8210	ECJ0EB1A333K	C 0.33UF, K, 10V	1	TH-37/42PE50B
C8212	ECJ0EB1C223K		1	TH-37/42PE50B
C8240	ECJ1VB0J105K	C 1UF, K, 16V	1	TH-37/42PE50B
C8268	ECJ1VB0J105K	C 1UF, K, 16V	1	TH-37/42PE50B
C8269	ECJ1VB1C104K	C 0.1UF, K, 16V	1	TH-37/42PE50B
C8303	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8305,06	ECJ1VB1H103K	C 0.01UF, K, 50V	2	TH-37/42PE50B
C8314	ECJ1VB1C104K	C 0.1UF, K, 16V	1	TH-37/42PE50B
C8315	ECJ2FF1A475Z	C 4.7UF, Z, 10V	1	TH-37/42PE50B
C8317,18	ECJ2FF1A475Z	C 4.7UF, Z, 10V	2	TH-37/42PE50B
C8319	ECJ1VB1C104K		1	TH-37/42PE50B
C8320-23		C 1UF, K, 16V	_	TH-37/42PE50B
C8327	EEEHB0J470R	C 47PF, J, 6.3V		TH-37/42PE50B
C8329	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8330,31	ECJ0EC1H181J	C 180PF, K, 50V	2	TH-37/42PE50B
C8332		C 0.01UF, K, 50V	1 1	TH-37/42PE50B
C8334,35	ł	C 330PF, K, 50V	2	TH-37/42PE50B
C8340	ECJ0EB1C682K		† <u>-</u>	TH-37/42PE50B
C8341	ECJ0EB1C822K			TH-37/42PE50B
		C 68PF, J, 4V		TH-37/42PE50B
C8344	ECJ0EB1C223K			TH-37/42PE50B
C8345		C 0.27UF, K, 10V		TH-37/42PE50B PAVCCZ
C8349-51	<del> </del>	C 0.1UF, K, 16V	3	TH-37/42PE50B
C8361	EEEHB1C470P	C 47PF, J, 16V	1	TH-37/42PE50B
C8372	ECJ1VB1C104K		<u> </u>	TH-37/42PE50B
C8376	ECJ1VB1C104K			TH-37/42PE50B
C8397	ECJ1VB1C104K			TH-37/42PE50B
		C 0.01UF, K, 50V		TH-37/42PE50B
C8401				
	<del>}</del>	C 0.10UF, Z, 16V		TH-37/42PE50B
C8406,07	ECJ0EF1C104Z		+	TH-37/42PE50B
C8409	ł — — — — — — — — — — — — — — — — — — —	C 0.10UF, Z, 16V	1	TH-37/42PE50B
C8410	ECJ1VB1C104K		1 1	TH-37/42PE50B
C8413-16	ECJ0EF1C104Z	C 0.10UF, Z, 16V	4	TH-37/42PE50B
C8419	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-37/42PE50B
C8421	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8423	ECJ1VB1C104K	C 0.1UF, K, 16V	1 1	TH-37/42PE50B
C8425	ECJ1VB1C104K	C 0.1UF, K, 16V	1 1	TH-37/42PE50B
C8427	EEEHB0J101P	C 100PF, J, 6.3V	1	TH-37/42PE50B
C8428	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-37/42PE50B
C8430-32	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	TH-37/42PE50B
C8433,34	ECJ0EB1C103K	C 0.01UF, K, 16V	2	TH-37/42PE50B
C8467	ECJ1VB1H103K	C 0.01UF, K, 50V	1	TH-37/42PE50B
C8501,02	ECJ0EC1H180J	C 180PF, K, 50V	2	TH-37/42PE50B
C8504	ECJ1VF1A105Z	C 1UF, Z, 10V	1	TH-37/42PE50B
C8506	ECJ2VF1C105Z	C 1UF, Z, 16V	1	TH-37/42PE50B
C8507	ECJ1XC1H102J	C 1000PF, J, 50V	1	TH-37/42PE50B
C8508	ECJ1XF1C334Z	C 0.33UF, Z, 16V	1	TH-37/42PE50B
C8509	EEEHB0J101P	C 100PF, J, 6.3V	1	TH-37/42PE50B
C8870	ECJ1XC1H471J	C 470PF, J, 50V	1	TH-37/42PE50B
C8872	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	TH-37/42PE50B
C8910	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	TH-37/42PE50B
C9000	EEEHB1C470P	C 47PF, J, 16V	1	
i	Ť	i	+	•

ı	1	,	
C9001	ECJ1XF1C104Z		1
C9004,05		C 0.1UF, Z, 16V	2
C9006	F1J0J1060004	C 0.010UF, K, 16V	1
C9007		C 47PF, J, 16V	1
C9008	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1
C9009	F1J0J1060004	C 0.010UF, K, 16V	1
C9010-12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3
C9013	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1
C9014	ECJ1XC1H101K	C 100PF, K, 50V	1
C9015-22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	8
C9023	EEEHB1C470P	C 47PF, J, 16V	1
C9024	ECJ1XC1H271J	C 270PF, J, 50V	1
C9025	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1
C9026,27	ECJ2VF1C105Z	C 1UF, Z, 16V	2
C9028-31	ECJ1XF1C104Z		4
C9033	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1
C9035,36	ECJ1XF1C104Z		2
C9201,02	ECJ1XB1C104K		2
C9203	ECJ1XC1H150J		1
C9204	ECJ1VC1H080C		1
C9205	F1J0J1060004	C 0.010UF, K, 16V	1
C9206,07	ECJ1XB1C104K		2
C9303		C 0.1UF, Z, 16V	1
C9304-57	ECJ1XB1C104K		54
C9358		C 220PF, J, 4V	1
C9359	ECJ1XB1C104K		1
C9360	ECJ1XF1C104Z		1
C9500		C 1UF, Z, 16V	1
C9502		C 1UF, Z, 16V	1
C9502		C 0.1UF, Z, 16V	10
C9503-12	EEEHB1C470P	C 47PF, J, 16V	10
C9514-17	ECJ1XB1C104K		4
C9514-17	EEEHB1C470P	C 47PF, J, 16V	1 1
C9518	ECJ1XC1H101K		1
C9701,02	ECJ1XC1H101K		2
		C 0.010UF, K, 16V	1
			2
C9705,06	F1J0J1060004	C 0.010UF, K, 16V	1
C9707	EEEHB1C470P	C 47PF, J, 16V	2
C9712,13	F1J0J1060004	C 0.010UF, K, 16V	
C9714,15	ECGRL0G680R	C 68PF, J, 4V	2
C9716	ECJ1XC1H220J	C 22PF, J, 50V	1
C9718	ECJ1XC1H220J	C 22PF, J, 50V	1
C9719,20	ECJ1XC1H102J	C 1000PF, J, 50V	2
C9721,22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2
C9723,24	ECJ2XB1H104K	C 0.1UF, K, 50V	2
C9725	ECJ1XC1H102J	C 1000PF, J, 50V	1
C9727	ECJ1XC1H102J	C 1000PF, J, 50V	1
C9728,29	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2
C9730,31	EEEHB1C470P	C 47PF, J, 16V	2
C9732	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1
C9733	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1
C9734,35	EEEHB1C470P	C 47PF, J, 16V	2
C9736	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1
C9739,40	ECJ1XB1C104K	C 0.1UF, Z, 16V	2
C9741	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1
C9742	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1
C9743,44	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2
C9900,01	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2
CB1-B7	K1MN68BA0002	68P CONNECTOR	7
H		+	

0110000	1,4,4,4,4,0,4,0,0,0,4	LAD CONNECTOR	1 4	DAY (0.07
CN8202	K1KA16A00204	16P CONNECTOR	1	PAVCCZ
D3	K1KA30AA0009	30P CONNECTOR	1	
D003	MA152K	DIODE	1	
D4	K1KA14A00248	14P CONNECTOR	1	
D5	K1KA31A00007	31P CONNECTOR	1	
D6	K1KA20A00310	20P CONNECTOR	1	
D8	K1KA08AA0104	08P CONNECTOR	1	
D20	K1KA20AA0008	20P CONNECTOR	1	
D25	K1KA20AA0009	20P CONNECTOR	1	
D33,34	K1MN55BA0076	55P CONNECTOR	2	
D1151	MA8120M	ZENER DIODE	1	
D1154-61	MA8062MTX	ZENER DIODE	8	
D1162	LN1271RALTR	LED	1	
D2011-14	MA111	DIODE	4	
D2104	MA152K	DIODE	1	
D2105-09	MA8140M	ZENER DIODE	5	
D2111	MA8140M	ZENER DIODE	1	
D2114	MA8140M	ZENER DIODE	1	
D2116-18	MA8140M	ZENER DIODE	3	
D2119	B0BC01100001	DIODE	1	
D2120	MA152K	DIODE	1	
D2300,01	MA111	DIODE	2	
D2303,04	MA111	DIODE	2	
D2315,16	B0JCDD000002	DIODE	2	
D2319,20	B0JCDD000002	DIODE	2	
D2332	MA111	DIODE	1	
D2512	MA8056M	ZENER DIODE	1	
D2513,14	MA152K	DIODE	2	
D2520	B3AAA0000770	DIODE	1	
D2523	MA152K	DIODE	1	
D2524	MA8056M	ZENER DIODE	1	
D2525	B3ACA0000272	DIODE	<del>                                     </del>	TH-37/42PE50B PAVCCZ
D2526	MA8056M	ZENER DIODE	1	TH-37/42PE50B
D2529	MA8056-M	DIODE	1	111 017 121 2005
D3002-12	MA8140M	ZENER DIODE	11	
D3002 12 D3015-19	MA8140M	ZENER DIODE	5	
D3013-13	MA152	DIODE	1	
D3023	MA111	DIODE	1	
D3023	B0BC01100001	DIODE	<u>†</u>	
D3024	MA8140M	ZENER DIODE	1	
D3025 D3026	MA111	DIODE	1	
D3020	MA8140M	ZENER DIODE	1	
D4231	MA111	DIODE	1	
D5610	MA3X78900L	ZENER DIODE	<del>                                     </del>	
D5614	B0BC6R600005	DIODE	<u> </u>	
D5615		DIODE	<u> </u>	
	B0BC4R700007		-	
D5616	B0BC6R600005	DIODE	1	
D5617	B0BC01100001	DIODE	1	
D5618	B0BC03900015	DIODE	1	
D5637,38	MA152	DIODE	2	
D5639	MA3047H	ZENER DIODE	1	
D5640	MA3068H	ZENER DIODE	1	
D5641	MA152	DIODE	1	
D5642	MA3100H	ZENER DIODE	1	
D5643	MA152	DIODE	1	
D5644	MA3068M	ZENER DIODE	1	
				1
D5645-47	MA152	DIODE	3	
D5645-47 D6001,02 D6015	MA152 B0HBSN000008 B0ECHP000003	DIODE DIODE DIODE	2	

1				
D6020		DIODE	1	
D6021	B0ECHP000003	DIODE	1	
D6022	B0HBSN000008	DIODE	1	
D6023	B0ECHP000003	DIODE	1	
D6024	B0HBSN000008	DIODE	1	
D6029	B0HBSN000008	DIODE	1	
D6035	MA8033L	ZENER DIODE	1	
D6036	MA111	DIODE	1	
D6040,41	B0ECHP000003	DIODE	2	
D6051	B0ECHP000003	DIODE	1	
D6052,53	B0JCME000037	DIODE	2	
D6054	B0ECHP000003	DIODE	1	
D6055	B0JCME000037	DIODE	1	
D6057	B0ECHP000003	DIODE	1	
D6058-59	MA111	DIODE	2	
D6060	MA111	DIODE	1	42 INCH
D6061	MA8082MTX	ZENER DIODE	1	42 INCH
D6062	MA111	DIODE	1	-
D6063	MA8051L	ZENER DIODE	1	
D6064	MA111	DIODE	1	
D6065	LNJ301MPUJA	LED	1	
D6066,67	MA8330M	ZENER DIODE	2	
D6070	MA111	DIODE	1	42 INCH
D6451	B0JCME000037	DIODE	1	172 114011
D6452,53	MA111	DIODE	2	
D6455	MA111	DIODE	1	
D6456	B0ECHP000003	DIODE	1	
	MA111	DIODE	1	
D6459		DIODE	2	
D6460,61				
D6462	B0JCME000037	DIODE	1	
D6463	MA8056H	ZENER DIODE	1	
D6464	B0JCME000037	DIODE	1	
D6465,66	MA8330M	ZENER DIODE	2	
D6467	B0ECHP000003	DIODE	1	
D6468	MA111	DIODE	1	
	MA111	DIODE	2	
D6473	MA111	DIODE	1	
D6475	MA111	DIODE	1	
D6476	B0ECHP000003	DIODE	1	
D6477	MA111	DIODE	1	
D6478	B0HCKS000002	DIODE	1	
D6479	MA111	DIODE	1	
D6481,82	MA8330M	ZENER DIODE	2	
D6483-90	MA8056H	ZENER DIODE	8	
D6491,92	B0ECHP000003	DIODE	2	
D6495	B0HCKS000002	DIODE	1	
D6496	B0JCME000037	DIODE	1	
D6501,02	MA111	DIODE	2	
D6503	MA8056H	ZENER DIODE	1	
D6509	MA111	DIODE	1	
D6511	B0HCMM000014	DIODE	1	
D6512-14	MA111	DIODE	3	
D6515	MA8240M	ZENER DIODE	1	
D6516	MA111	DIODE	1	
D6519	MA111	DIODE	1	
D6520	B0JCKG000002	DIODE	1	
D6521	B0ECHP000003	DIODE	1	
D6522	MA111	DIODE	1	
D6523	B0ECHP000003	DIODE	1	
<u> </u>	+	<del> </del>	<u> </u>	+

ı	1		ı	
D6524	MA8051L	ZENER DIODE	1	
D6525	MA111	DIODE	1	
D6526	B0HCMM000014		1	
D6527	MA111	DIODE	1	
D6529	B0JCME000037	DIODE	1	
D6541	B0HCKS000002	DIODE	1	
D6542	MA111	DIODE	1	
D6543	B0HCKS000002	DIODE	1	
D6544	MA111	DIODE	1	
D6545	MA8051L	ZENER DIODE	1	
D6546-48	MA8330M	ZENER DIODE	3	
D6549,50	MA111	DIODE	2	
D6551	B0JCME000037	DIODE	1	
D6552,53	MA111	DIODE	2	
D6554	B0HCKS000002	DIODE	1	
D6570	B0HCMM000014	DIODE	1	
D6572	B0ECHP000003	DIODE	1	
D6582	MA8051L	ZENER DIODE	1	
D6583	LNJ301MPUJA	LED	1	
D6584	MA111	DIODE	1	
D6585,86	MA8330M	ZENER DIODE	2	
D6601,02	B0HBSN000008	DIODE	2	
D6615	B0ECHP000003	DIODE	1	
D6620	B0HBSN000008	DIODE	1	
D6621	B0ECHP000003	DIODE	1	
D6622	B0HBSN000008	DIODE	1	
D6623	B0ECHP000003	DIODE	1	
D6624	B0HBSN000008	DIODE	1	
D6629	B0HBSN000008	DIODE	1	
D6635	MA8033L	ZENER DIODE	1	
D6636	MA111	DIODE	1	
D6640	B0ECHP000003	DIODE	1	
	B0ECHP000003	DIODE	1	
	MA8056H	ZENER DIODE	3	
D6905	D1FL40F4063	DIODE	1	
	D1FL40F4063	DIODE	2	
	MA8056H	ZENER DIODE	2	
	D1FL40F4063	DIODE	2	
D8002	MA728	DIODE	1	TH-37/42PE50B
D8006	MA3082HTX	ZENER DIODE	1	TH-37/42PE50B
D8203,04	B0JCPE000004	DIODE	2	TH-37/42PE50B PAVCCZ
D8501	HVU359TRF	DIODE	1	TH-37/42PE50B
D9000-02	MA3033	ZENER DIODE	3	111 077 121 2008
-	MA728	DIODE	2	
	MA152K	DIODE	2	
	MA728	DIODE	2	
	MA152K	DIODE	2	
D9900,01	K1MN40A00024	40P CONNECTOR	1	TH-37/42PE50B
DG1 DG2	<del>-</del>	40P CONNECTOR	1	TH-37/42FE30B
DG2 DG3	K1MN40A00024 K1KA20B00155	20P CONNECTOR	1	
			1	
DG5	K1KA21B00008	21P CONNECTOR		
DG20	K1MN30A00068	30P CONNECTOR	1	TU 27/42DE50D
DG22	K1KBB0A00005	CONNECTOR	1	TH-37/42PE50B
DG32	K1KA08AA0150	8P CONNECTOR	1	
FL1100	J0HABH000012	LC FILTER	1	TH 07/40D==00
	J0HABH000012	LC FILTER	3	TH-37/42PE50B
	J0HABH000012	LC FILTER	2	
	J0HABH000012	LC FILTER	4	
FL7106	J0HABH000013	LC FILTER	1	

FL7201	J0HABH000013	LC FILTER	l 1	37 INCH
FL7208	<b>.</b>	LC FILTER		42 INCH
FL8201	TAX10075	EMI FILTER	1	TH-37/42PE50B
		LC FILTER	5	111 017421 2005
	ļ	LC FILTER	3	
-	<del> </del>	LC FILTER	2	
FL9703,04	<b>.</b>	LC FILTER	2	
FL9900,01	ļ.	LC FILTER	2	
H1		40P CONNECTOR	1	TH-37/42PE50B
H2		40P CONNECTOR	1	1H-37/42PE30B
H5	<del> </del>	15P CONNECTOR	1	
	K1KA15A00064			
H6	K1KA09A00064	9P CONNECTOR	1	
H12	K1KA09AA0190	9P CONNECTOR	1	
H15	K1KA04AA0150	4P CONNECTOR	1	
H30	K1MN30A00068	30P CONNECTOR	1	
H50	K1MN35A00013	35P CONNECTOR	1	
H53	K1KA12AA0178	12P CONNECTOR	1	
HMM1-M4	TMM25401	CLAMPER	4	
IC1103	C0DBEZG00013	IC	1	
IC1104	C2CBYF000032	IC		PAVCCZ
IC1105	TC4066BF	MOS IC	1	
IC1106	CXA1875AM	LINEAR IC	1	
IC1107	TVRN563	IC		PAVCCZ
IC1108	C0EBE0000336	IC	1	
IC1109	C0JBBZ000281	IC	1	
IC1110	C0CBCBD00043	IC	1	
IC1114	C3ABPG000133	IC	1	
IC1115	TVRN561	IC	1	PAVCCZ
IC1117	C0JBAZ002186	IC	1	
IC1235	C0ZBZ0000800	IC	1	
IC2103	AN77L08M	IC	1	
IC2104	NJM2115M	IC	1	
IC2105	AN15861A-VT	IC	1	
IC2106	C1AB00002135	IC	1	
IC2107	C0DBEZE00006	IC	1	
IC2108	C0EBF0000354	IC	1	
IC2111,12	NJM2521MTE1	IC	2	TH-37/42PE50B
IC2300	C1BB00000800	IC	1	
IC2302	NJM2904M	LINEAR IC	1	
IC2305,06	C1BB00000818	IC	2	
IC3001,02	C1AB00001486	IC	2	
IC3004	C1AB00001487	IC	1	
IC3005	AN15866A-VT	IC	1	PAVCCZ
IC3006	CXA1315M	LINEAR IC	1	
IC4005	C1AB00002204	IC	1	
IC4008	C0CBCBD00008	IC	1	
IC4012	C1AB00001834	IC	1	
IC4014	C0JBAZ002186	IC	1	
IC4016	C0FBBD000065	IC	1	
IC4021	C0JBAP000020	IC	1	
IC4024	C0DBZFG00055	IC	1	
IC4025	C0CBCAC00275	IC	1	
IC4041	C0CBCAC00275	IC	1	
IC4042	C0DBEJG00001	IC	1	
IC4044	C0CBCAC00136	IC	1	
IC4048	C0DBEJG00001	IC	1	
IC4049	C0CBCBF00009	IC	1	
	<u> </u>	_		l
IC4051	C1ZBZ0002790	IC	1	

1	ı			1
IC4054		IC	1	
IC4055	C3ABQJ000040	IC	1	
IC4063	C0EBC0000150	IC	1	
IC5601,02	N0BF2DE00001	IC	2	
IC5603	C0DBAJB00004	IC	1	
IC5803	C0DAEZH00017	IC	1	
IC6001-03	C0ZBZ0000895	IC	3	
IC6004	C0ZBZ0000735	IC	1	
IC6005	NJM2903M	INTEGRATED CIRCUIT	1	C0BBBA000019
IC6006	C0JBAZ000005	IC	1	
IC6011	AN1431M	LINEAR IC	1	
IC6451	AN1431M	LINEAR IC	1	
IC6452,53	C0CBALC00010	IC	2	
IC6454,55	C0CBADC00075	IC	2	
IC6456	AN1431M	LINEAR IC	1	
IC6471,72	AN1431M	LINEAR IC	2	
IC6491	AN1431M	LINEAR IC	1	
IC6501,02	C0JBAZ000994	IC	2	
IC6511	C0ZBZ0000735	IC	1	
IC6512	C0CBADC00075	IC	1	
IC6521	C0ZBZ0000735	IC	1	
IC6541,42	C0ZBZ0000735	IC	2	
IC6543	C0CBADC00075	IC	1	
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	
IC6601,02	C0ZBZ0000895	IC	2	
IC6605,06	C0JBAZ000005	IC	2	
IC6607	C0JBAA000174	IC	1	
IC6901-04	AN16021A-VT	IC	4	
IC6955-58	AN16021A-VT	IC	4	
IC7101	C0JBAZ001120	IC	1	
IC7104-06	C0JBAZ001120	IC	3	
IC7201-04	C0JBAZ001120	IC	4	
IC8003	STV0360	IC	1	TH-37/42PE50B PAVCCZ
IC8009		IC	1	TH-37/42PE50B PAVCCZ
IC8013	MN2WS0025AEA		1	TH-37/42PE50B PAVCCZ
IC8019	C3FBPG000015			TH-37/42PE50B PAVCCZ
IC8023,24	C0DBAMH00018		_	TH-37/42PE50B PAVCCZ
IC8029	C0FBBK000038	IC	1	TH-37/42PE50B
IC8031	BA15218FDX	IC	1	TH-37/42PE50B
IC8034	C0DBEJG00001	IC	1	TH-37/42PE50B
IC8042	C0EBM0000027	IC	1	TH-37/42PE50B
IC8043	C0EBE0000336	IC IC	1	TH-37/42PE50B
IC8213	74LVC245APWR		1	TH-37/42PE50B PAVCCZ
IC8401	MIC2548-1BM	IC IC	1	TH-37/42PE50B PAVCCZ
IC8402	74LVC4245AD	IC IC	1	TH-37/42PE50B PAVCCZ
IC8404	C0JBCZ000255	IC IC	1	TH-37/42PE50B
IC8408-11	C0JBCZ000255	IC IC	<u> </u>	TH-37/42PE50B
IC8412		IC	1	TH-37/42PE50B PAVCCZ
IC8501	74VHCU04MX	IC IC	1	TH-37/42PE50B PAVCCZ
IC8864	C0DBFFD00003	IC	1	TH-37/42PE50B
IC9001	TVRN460		<u> </u>	DAV (007
IC9003	C2CBJG000441	IC IC	1	PAVCCZ
IC9004	C0EBE0000120	IC IC	1	
IC9005,06	C0JBAZ000856	IC	2	
IC9007	TVRN462	IC	1	
IC9008	C0DBEJG00001	IC	1	
IC9200	C1ZBZ0002769	IC	1	
IC9300	MN84512-A	IC	1	
IC9301	PST9128NR	IC (LOGIC)	1	

1				
IC9302	C3ABQJ000031	IC	1	
IC9303	TVRN461	IC	1	
IC9500	C1ZBZ0002599	IC	1	
IC9502	C0JBAZ000856	IC	1	
IC9504	C0JBAZ000856	IC	1	
IC9700	C0DBEJG00001	IC	1	
IC9702	C0DBAZH00020	IC	1	
JK2002,03	K2HA204A0038	JACK	2	
JK3002-04	K1FB121A0006	JACK	3	
JK3005	K2HA307A0008	JACK	1	
JK8201	K1KAB0A00010	110P CONNECTOR	1	TH-37/42PE50B
JK8401	K1NA68B00038	68P CONNECTOR	1	TH-37/42PE50B PAVCCZ
JS012	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-37/42PE50B
JS1000	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS1177	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-37/42PA50E
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-37/42PE50B
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
		-		
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TI L 07/40D A 505
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-37/42PA50E
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS3001	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	14	
JS3022,23	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3206	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3302-04	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS3401-08	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
JS4002	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4004-06	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4014	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4022,23	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS4025-26	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-37/42PE50B
JS4027-30	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
JS4081	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-37/42PE50B
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-37/42PA50E
	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS4901	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
	ERJ6GEY0R00	M 0 OHM, 1/10W	9	
			_	
	K1KA12BA0053	12P CONNECTOR	1	
L003-05	J0JCC0000364	CHIP INDUCTOR	3	
1	I	I	1	I

l	l	lo	ء ا	ı
L006,07	J0JCC0000241	CHIP INDUCTOR	2	
L008	EXC3BB221H	BEAD CHOKE	1	
L012	J0JCC0000241	CHIP INDUCTOR	1	
L017,18	J0JGC0000021	CHIP INDUCTOR COIL	2	
L019	J0JCC0000241	CHIP INDUCTOR	1	TH-37/42PA50E
L1009	J0JHC0000078	CHIP INDUCTOR	1	
L1110-14	J0JHC0000078	CHIP INDUCTOR	5	
L1120	J0JHC0000078	CHIP INDUCTOR	1	
L1170	J0JHC0000078	CHIP INDUCTOR	1	
L1172	ELJFA8R2KB	CHIP INDUCTOR	1	
L1174	J0JCC0000241	CHIP INDUCTOR	1	
L1175,76	J0JHC0000078	CHIP INDUCTOR	2	
L2001,02	J0JCC0000364	CHIP INDUCTOR	2	
L2003-16	EXC3BB221H	BEAD CHOKE	14	
L2101,02	EXCELDR35C	BEAD CHOKE	2	TH-37/42PE50B
L2107,08	J0JCC0000241	CHIP INDUCTOR	2	
L2109,10	TSK1032	BEAD CHOKE	2	
L2111,12	J0JCC0000241	CHIP INDUCTOR	2	
L2113,14	TSK1032	BEAD CHOKE	2	
L2115	J0JCC0000241	CHIP INDUCTOR	1	
L2117	ELESE6R8KA	PEAKING COIL	1	
L2118	EXCELDR35C	BEAD CHOKE	1	
L2120	J0JCC0000241	CHIP INDUCTOR	1	
L2121	EXCELDR35C	BEAD CHOKE	1	
L2122	TSK1032	BEAD CHOKE	1	
L2123	J0JCC0000241	CHIP INDUCTOR	1	
L2178,79	J0JCC0000241	CHIP INDUCTOR	2	
L2182-87	J0JCC0000241	CHIP INDUCTOR	6	
L2204	J0JCC0000241	CHIP INDUCTOR	1	
L2305,06	G0A100ZA0033	CHOKE COIL	2	
L2312,13	G0A100ZA0033	CHOKE COIL	2	
L2316-19	J0JJC0000011	CHIP INDUCTOR	4	
L3001-03	EXC3BB221H	BEAD CHOKE	3	
L3004,05	J0JCC0000241	CHIP INDUCTOR	2	
L3008,09	J0JCC0000241	CHIP INDUCTOR	2	
L3201	TSK1040	FERRITE CORE	1	
L3211	ELJNC15NKB	CHIP COIL	1	
L3212	EXC3BB221H	BEAD CHOKE	1	
L4001	J0JHC0000078	CHIP INDUCTOR	1	
L4003,04	J0JHC0000078	CHIP INDUCTOR	2	
L4006-08	J0JHC0000078	CHIP INDUCTOR	3	
L4104	J0JCC0000241	CHIP INDUCTOR	$\frac{3}{1}$	
L4105	J0JHC0000078	CHIP INDUCTOR	<del>                                     </del>	
L4106	J0JCC0000241	CHIP INDUCTOR	1	
L4151	J0JCC0000241	CHIP INDUCTOR	$\frac{1}{1}$	
L4131 L4231	J0JCC0000241	CHIP INDUCTOR	$\frac{1}{1}$	
L4231 L4501	J0JHC0000078	CHIP INDUCTOR	1	
			_	
L4503,04	J0JHC0000078	CHIP INDUCTOR	2	
L4505	J0JCC0000241	CHIP INDUCTOR	1	
L4506	J0JHC0000078	CHIP INDUCTOR	1	
L4508,09	J0JHC0000078	CHIP INDUCTOR	2	
L4510	J0JCC0000241	CHIP INDUCTOR	1	
L4511	J0JHC0000078	CHIP INDUCTOR	1	
L4701	J0JHC0000078	CHIP INDUCTOR	1	
L4751	J0JCC0000241	CHIP INDUCTOR	1	
L4801-03	J0JHC0000078	CHIP INDUCTOR	3	
L4861,62	J0JHC0000078	CHIP INDUCTOR	2	
L4900,01	J0JHC0000078	CHIP INDUCTOR	2	
L5604	G0A470GA0002	CHOKE COIL	1	

ı	1			
L5605	G1C1R0MA0072		1	
L5606	TALL08N120KA	INDUCTION COIL	1	
L5607	G0C101K00023	PEAKING COIL	1	
L5608	G1C100MA0072	CHOKE COIL	1	
L5609	TALL08N120KA	INDUCTION COIL	1	
L5610	G1C470MA0077	INDUCTION COIL	1	
L5611	G1A470ZA0007	CHOKE COIL	1	
L5612	G0A220GA0002	CHOKE COIL	1	
L5613,14	G1A470ZA0007	CHOKE COIL	2	
L5615	G0A220GA0002	CHOKE COIL	1	
L5616	G1A470ZA0007	CHOKE COIL	1	
L5808	G0A100GA0013	CHOKE COIL	1	
L5810	G0A100GA0013	CHOKE COIL	1	
L6002-04	G0ZZ00002183	PEAKING COIL	3	
L6005	G0C101K00023	PEAKING COIL	1	
L6011-13	G0AR60MA0003	CHOKE COIL	3	
L6014	G0A1R0MA0003	CHOKE COIL	1	
L6015		CHOKE COIL	1	42 INCH
L6016	G0A1R0MA0003	CHOKE COIL		37 INCH
L6017	J0JJC0000021	CHIP INDUCTOR	1	37 INCH
L6018	J0JJC0000021	CHIP INDUCTOR	1	
L6019	G0ZZ00002183	PEAKING COIL	1	
L6022	J0JJC000021	CHIP INDUCTOR	1	
L6022 L6024-27	G0ZZ00002183	PEAKING COIL	4	
			4	
L6034-37	G0ZZ00002183	PEAKING COIL	—	
L6042,43	J0JJC0000021	CHIP INDUCTOR	2	
L6047	J0JJC0000021	CHIP INDUCTOR	1	
L6050	G0ZZ00002183	PEAKING COIL	1	
L6451	J0JJC0000021	CHIP INDUCTOR	1	
L6453	J0JJC0000021	CHIP INDUCTOR	1	
L6471	J0JJC0000021	CHIP INDUCTOR	1	
L6472	G0ZZ00002183	PEAKING COIL	1	
L6602	G0ZZ00002183	PEAKING COIL	1	
L6604	G0ZZ00002183	PEAKING COIL	1	
L6611-13	G0AR60MA0003	CHOKE COIL	3	
L6614	G0A1R0MA0003		1	
L6615	G0A1R0MA0003		_	42 INCH
L6616	G0A1R0MA0003	CHOKE COIL	1	37 INCH
L6618	J0JJC0000021	CHIP INDUCTOR	1	
L6624-27	G0ZZ00002183	PEAKING COIL	4	
L6634-37	G0ZZ00002183	PEAKING COIL	4	
L6647	J0JJC0000021	CHIP INDUCTOR	1	
L8004	J0JHC0000045	CHIP INDUCTOR	1	TH-37/42PE50B
L8008	J0JHC0000045	CHIP INDUCTOR	1	TH-37/42PE50B
L8026	J0JHC0000035	CHIP INDUCTOR	1	TH-37/42PE50B
L8029,30	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-37/42PE50B
L8031-33	J0JHC0000045	CHIP INDUCTOR	3	TH-37/42PE50B
L8038	J0JHC0000045	CHIP INDUCTOR	1	TH-37/42PE50B
L8042	J0JHC0000045	CHIP INDUCTOR	1	TH-37/42PE50B
L8046	ELJPA1R0MB	INDUCTION COIL	1	TH-37/42PE50B
L8047,48	G1C220MA0167	COIL	2	TH-37/42PE50B PAVCCZ
L8049	J0JHC0000045	CHIP INDUCTOR	1	TH-37/42PE50B
L8051	J0JCC0000241	CHIP INDUCTOR	1	TH-37/42PE50B
L8055	G1C100MA0077	INDUCTION COIL	1	TH-37/42PE50B
L8059	J0JHC0000045	CHIP INDUCTOR	1	TH-37/42PE50B
L8106	ELJFA2R7JB	INDUCTION COIL	1	TH-37/42PE50B PAVCCZ
L8141,42	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-37/42PE50B
L8145	J0JHC0000045	CHIP INDUCTOR	1	TH-37/42PE50B
L8501	ELJNA2R7JB	INDUCTION COIL	1	TH-37/42PE50B
-0001	UIV/121(10D	INDOO HON OOIL	⊢.	111 01/421 2000

l	la.a.	I		1
L9200	G1C150KA0038	INDUCTION COIL	1	
L9500,01	J0JHC0000078	CHIP INDUCTOR	2	
L9700	G1C4R3M00003	CHIP INDUCTOR	1	
L9701	G1C6R8M00009	CHIP INDUCTOR	1	
	K1KA08AA0192	8P CONNECTOR	1	
	K1KA06A00452	6P CONNECTOR	1	
	K1MN30A00068	30P CONNECTOR	1	
PA30	K1MN30A00068	30P CONNECTOR	1	
PA5601,02	K5H4022A0023	FUSE	2	
PB5	K1KA11AA0194	11P CONNECTOR	1	
PB7	K1KA08AA0192	8P CONNECTOR	1	
PC6458	B3PBA0000223	IC	1	
PC6467	B3PBA0000223	IC	1	
PC6469	B3PBA0000223	IC	1	
PC6474	B3PBA0000223	IC	1	
PC6480	B3PBA0000223	IC	1	
PC6503	B3PBA0000233	IC	1	
	B3PBA0000233	IC	1	
	B3PBA0000233	IC	1	
	B3PBA0000234	IC	2	
	B3PBA0000223	IC	1	
	2SB709A	TRANSISTOR	2	<u> </u>
	2SD601A	TRANSISTOR	5	
· ·	2SA207700L	TRANSISTOR	1	
	2SD601A	TRANSISTOR	1	
	2SD601A	TRANSISTOR	2	
			1	
Q1176	UN5211	TRANSISTOR	1	
	UN5111	TRANSISTOR		
	UN5211	TRANSISTOR	3	
Q1182	2SD601A	TRANSISTOR	1	
Q1184	2SD601A	TRANSISTOR	1	
	2SD601A	TRANSISTOR	1	
	2SD601A	TRANSISTOR	4	
,-	2SD601A	TRANSISTOR	2	
	2SD601A	TRANSISTOR	2	
Q2011	2SB709A	TRANSISTOR	1	
Q2012	2SD601A	TRANSISTOR	1	
	2SB709A	TRANSISTOR	1	
	2SB709A	TRANSISTOR	4	
	2SD601A	TRANSISTOR	1	
	2SD601A	TRANSISTOR	1	TH-37/42PA50E
	2SD601A	TRANSISTOR	1	
	2SD601A	TRANSISTOR	1	TH-37/42PA50E
Q2110,11	2SB709A	TRANSISTOR	2	TH-37/42PA50E
Q2300	2SC584500L	TRANSISTOR	1	
Q2301	2SD601A	TRANSISTOR	1	
Q2302	2SC584500L	TRANSISTOR	1	
Q2314-17	2SC584500L	TRANSISTOR	4	
Q2323	2SA207700L	TRANSISTOR	1	
Q2324	2SC584500L	TRANSISTOR	1	
Q2510,11	2SD601A	TRANSISTOR	2	
Q2518	2SD601A	TRANSISTOR	1	TH-37/42PE50B
	2SB709A	TRANSISTOR	1	
	2SD601A	TRANSISTOR	6	
	2SB709A	TRANSISTOR	1	
	2SD601A	TRANSISTOR	1	
				<del> </del>
	l2SB709A	TRANSISTOR	2	
Q3010,11	2SB709A 2SB709A	TRANSISTOR TRANSISTOR	2	

i	1	1		
Q3016	2SD601A	TRANSISTOR	1	
Q3017	2SB709A	TRANSISTOR	1	
Q3019-22	2SD601A	TRANSISTOR	4	
Q4006	2SD601A	TRANSISTOR	1	
Q4010-12	2SD601A	TRANSISTOR	3	
Q4013	2SA207700L	TRANSISTOR	1	
Q4015	2SB1218ARL	TRANSISTOR	1	
Q4016	2SA207700L	TRANSISTOR	1	
Q4068	2SD601A	TRANSISTOR	1	
Q4101	2SD601A	TRANSISTOR	1	
Q4103,04	2SD601A	TRANSISTOR	2	
Q4106,07	2SD601A	TRANSISTOR	2	
Q4109-12	2SD601A	TRANSISTOR	4	
Q4900	2SD601A	TRANSISTOR	1	
Q5601	B1DHDC000028	TRANSISTOR	1	
Q5602	2SC584500L	TRANSISTOR	1	
Q5603	B1DHDC000028	TRANSISTOR	1	
Q5604,05	2SC584500L	TRANSISTOR	2	
Q5606	B1DHDC000028	TRANSISTOR	1	
Q5607	2SC584500L	TRANSISTOR	1	
Q5613	2SC584500L	TRANSISTOR	1	
Q5614	2SK3065T100	FET	1	
Q5641-43	2SA207700L	TRANSISTOR	3	
Q5644	2SC584500L	TRANSISTOR	1	
Q6001-03	B1JADN000001	TRANSISTOR	3	
Q6006-08	B1JADN000001	TRANSISTOR	3	
Q6011	2SD2185	TRANSISTOR	1	
Q6012	2SB1073001TV	TRANSISTOR	1	
Q6013	2SD2185	TRANSISTOR	1	
Q6014	2SB1073001TV	TRANSISTOR	1	
Q6021	B1DEKM000001	TRANSISTOR	1	42 INCH
Q6021	2SK3996000VP	TRANSISTOR	1	37 INCH
Q6024	B1DEKM000001	TRANSISTOR	1	42 INCH
Q6024	2SK3996000VP	TRANSISTOR	1	37 INCH
Q6025	2SK620	FET	1	
Q6041,42	B1DFKM000002	TRANSISTOR	2	
Q6045	2SK326800L	FET	1	
Q6046	B1DFKM000002	TRANSISTOR	1	
Q6051	2SD1263A	TRANSISTOR	1	
Q6052	2SC1473A	TRANSISTOR	1	
Q6055	2SD601A	TRANSISTOR	1	42 INCH
Q6056	2SD601A	TRANSISTOR	1	
Q6451	2SD1263A	TRANSISTOR	1	
Q6454	2SC1473A	TRANSISTOR	1	
Q6461	B1BBCJ000004	TRANSISTOR	1	
Q6462	2SB0709A	TRANSISTOR	1	
Q6463	2SD601A	TRANSISTOR	1	
Q6471	B1BBCJ000004	TRANSISTOR	1	
Q6472	2SB0709A	TRANSISTOR	1	
Q6474	2SD814A	TRANSISTOR	1	
Q6476,77	2SD6014A	TRANSISTOR	2	
Q6491	2SD1263A	TRANSISTOR	1	
Q6491 Q6492	2SC1473A	TRANSISTOR	1	
Q6501-05	2SK620	FET	5	
	·		2	
Q6511,12	B1DFGL000008	TRANSISTOR	1	
Q6520	2SD601A	TRANSISTOR	1	
Q6521	B1DFES000001	TRANSISTOR		
Q6522-28	2SK400000L	FET	7	
Q6530	2SB1073001TV	TRANSISTOR	1	

i				
Q6541	2SB1073001TV	TRANSISTOR	1	
Q6542	2SK399500L	FET	1	
Q6544-46	2SK399500L	FET	3	
Q6548	2SK399500L	FET	1	
Q6551	2SD601A	TRANSISTOR	1	
Q6552	B1DEET000002	TRANSISTOR	1	
Q6553	2SB1073001TV	TRANSISTOR	1	
Q6554	2SD2185	TRANSISTOR	1	
Q6555	B1DFES000001	TRANSISTOR	1	
Q6581	2SD601A	TRANSISTOR	1	
Q6583,84	2SK620	FET	2	
Q6601-03	B1JADN000001	TRANSISTOR	3	
Q6606-08	B1JADN000001	TRANSISTOR	3	
Q6611	2SD2185	TRANSISTOR	1	
Q6612	2SB1073001TV	TRANSISTOR	1	
Q6613	2SD2185	TRANSISTOR	1	
Q6614	2SB1073001TV	TRANSISTOR	1	
Q6621	B1DEKM000001	TRANSISTOR	1	42 INCH
Q6621	2SK3996000VP	TRANSISTOR		37 INCH
Q6624	B1DEKM000001	TRANSISTOR	_	42 INCH
Q6624	2SK3996000VP	TRANSISTOR	1	37 INCH
Q6901	2SK620	FET	<del>                                     </del>	07 114011
Q8101	2SA207700L	TRANSISTOR	<del>                                     </del>	L TH-37/42PE50B
Q9000,01	2SD601A	TRANSISTOR	1 2	111-377421 E30B
Q9000,01			1	
	B1DHCC000034	TRANSISTOR	<del>                                     </del>	
Q9004	2SB709A	TRANSISTOR		
Q9008,09	2SK2731T146	TRANSISTOR	2	
Q9010,11	2SD601A	TRANSISTOR	2	
Q9012,13	2SK2731T146	TRANSISTOR	2	
Q9020-23	2SD601A	TRANSISTOR	4	
Q9500	2SK2731T146	TRANSISTOR	1	
Q9700	2SD601A	TRANSISTOR	1	
Q9701,02		TRANSISTOR	2	
Q9703,04	2SD601A	TRANSISTOR	2	
Q9900,01	2SD601A	TRANSISTOR	2	
R002		M 220 OHM,J,1/16W	1	
R003	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R005	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R006	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R007	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R008,09	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1110,11	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1115	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1123	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R1125	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R1127	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R1134	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R1146	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1149	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R1150	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1151	ERJ3GEYJ225	M 2.2MOHM,J,1/16W	1	
R1152	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R1153	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R1155	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1157	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R1158,59	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R1160	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
R1161	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R1162	ERJ3GEY0R00	M 0 OHM, 1/16W	<del>                                     </del>	
		1 J J   1	<del></del>	l .

R1164 ERJ3GEYJ273 M 27KOHM,J,1/16W 1 R1165 ERJ3GEYJ821 M 820 OHM,J,1/16W 1 R1168 ERJ3GEYJ222 M 2.2KOHM,J,1/16W 1 R1170 TAJAAH0101JV M 100 OHM,J,1/16W 1 R1171 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R1172 ERJ6GEYDR00 M 0 OHM, J/1/10W 1 R1173 ERJ3GEY0R00 M 0 OHM, J/1/10W 1 R1173 ERJ3GEYOR00 M 0 OHM, J/1/16W 1 R1175 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R1176 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R1177 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1178 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R1180 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R1180 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R1180 ERJ3GEYJ233 M 0.0HM, J/1/16W 1 R1185 TAJAAH0101JV M 100 OHM, J/1/16W 1 R1186 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R1187 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1188 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1188 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1189 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1190-97 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1200 TAJAAH0101JV M 100 OHM,J,1/16W 1 R1201 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1201 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1201 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1202 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1204 ERJ3GEYJ222 M 22 OHM,J,1/16W 1 R1205 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1206 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1212 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1214 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1215 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1216 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1217 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1218 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1219 ERJ3GEYOR00 M 0 OHM, J/1/6W 1 R1214 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1215 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1221 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1222 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1223 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1224 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1225 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1226 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1227 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1228 ERJ3GEYJ103 M 10KOHM,J/1/6W 1 R1231 ERJ3GEYJ104 M 10KOHM,J/1/6W 1 R1233 ERJ3GEYJ105 M 10KOHM,J/1/6W 1 R1233 ERJ3GEYJ104 M 10KOHM,J/1/6W 1 R1233 ERJ3GEYJ105 M 10KOHM,J/1/6W 1 R1235 ERJ3GEYJ102 M 1KOHM,J/1/6W 1 R1237 ERJ3GEYJ102 M 1KOHM,J/1/6W 1	1 ,				
R1166 ERJ3GEYJ222 M 2.2KOHM,J,1/16W 1 R1168 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1170 TAJAAH0101JV M 100 OHM,J,1/16W 1 R1171 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R1172 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R1173 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R1175 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R1176 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1177 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R1178 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1180 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R1180 ERJ3GEYJ331 M 330 OHM, J/1/16W 1 R1185 TAJAAH0101JV M 100 OHM, 1/16W 1 R1186 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R1187 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R1188 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1188 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1189 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1190-97 ERJ3GEYOR00 M 0 OHM, 1/16W 8 R1190 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1201 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1201 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1202 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1201 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 R1202 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1201 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1202 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1201 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1202 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1204 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1204 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1205 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1214 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1214 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1215 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1217 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1229 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1223 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1231 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1231 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1231 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1231 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 66KOHM,J,1/16W 1			M 27KOHM,J,1/16W	_	
R1168 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1170 TAJAAH0101JV M 100 OHM, J/1/16W 1 R1171 ERJ6GEYJ222 M 2.2KOHM,J.1/10W 1 R1172 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R1173 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1175 ERJ3GEYJ392 M 3.9KOHM,J.1/16W 1 R1176 ERJ3GEYJ473 M 47KOHM,J.1/16W 1 R1177 ERJ3GEYJ223 M 22KOHM,J.1/16W 1 R1178 ERJ3GEYJ223 M 22KOHM,J.1/16W 1 R1180 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R1180 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R1181 FAJAAH0101JV M 100 OHM,J.1/16W 1 R1182 ERJ3GEYJ331 M 330 OHM,J.1/16W 1 R1183 ERJ3GEYJ471 M 470 OHM,J.1/16W 1 R1184 ERJ3GEYJ103 M 10KOHM,J.1/16W 1 R1189 ERJ3GEYJ103 M 10KOHM,J.1/16W 1 R1190-97 ERJ3GEY0R00 M 0 OHM, 1/16W 8 R1199 ERJ3GEYJ0R00 M 0 OHM, 1/16W 1 R1200 TAJAAH0101JV M 100 OHM,J.1/16W 1 R1201 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202-04 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202-04 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1204 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1205 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1206 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1213 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1214 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1215 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J.1/16W 1 R1217 ERJ3GEYJ103 M 10KOHM,J.1/16W 1 R1218 ERJ3GEYJ103 M 10KOHM,J.1/16W 1 R1219 ERJ3GEYJ103 M 10KOHM,J.1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J.1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J.1/16W 1 R1224 ERJ3GEYJ103 M 10KOHM,J.1/16W 1 R1229 ERJ3GEYJ104 M 10OKOHM,J.1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J.1/16W 1 R1223 ERJ3GEYJ104 M 10OKOHM,J.1/16W 1 R1231 ERJ3GEYJ104 M 10OKOHM,J.1/16W 1 R1231 ERJ3GEYJ104 M 10OKOHM,J.1/16W 1 R1235 ERJ3GEYJ105 M 56KOHM,J.1/16W 1 R1235 ERJ3GEYJ106 M 56KOHM,J.1/16W 1 R1235 ERJ3GEYJ106 M 56KOHM,J.1/16W 1		ERJ3GEYJ821	M 820 OHM,J,1/16W	<u> </u>	
R1170 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R1171 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R1172 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R1173 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1175 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1 R1177 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1 R1177 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R1178 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R1180 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R1186 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R1186 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R1187 ERJ3GEYJ0R00 M 0 OHM, J, 1/16W 1 R1188 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R1189 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R1190-97 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1190-97 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1200 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R1201 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R1202 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R1206 ERJ3GEYJ200 M 0 OHM, 1/16W 3 R1206 ERJ3GEYJ200 M 0 OHM, 1/16W 1 R1212 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1214 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1215 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1216 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1217 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R1218 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1219 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R1210 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1211 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1212 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1214 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1215 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1216 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1217 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1218 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1219 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1214 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1215 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1221 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1222 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1221 ERJ3GEYJ80 M 0 OHM, 1/16W 1 R1222 ERJ3GEYJ80 M 0 OHM, 1/16W 1 R1222 ERJ3GEYJ80 M 0 OHM, 1/16W 1 R1222 ERJ3GEYJ80 M 0 OHM, 1/16W 1 R1223 ERJ3GEYJ80 M 0 OHM, 1/16W 1 R1224 ERJ3GEYJ80 M 68KOHM,J,1/16W 1 R1235 ERJ3GEYJ30 M 0 OHM,J,1/16W 1 R1236 ERJ3GEYJ30 M 0 OHM,J,1/16W 1 R1237 ERJ3GEYJ660 M 0 OHM,J,1/16W 1 R1238 ERJ3GEYJ560 M 0 OHM,J,1/16W 1 R1239 ERJ3GEYJ680 M 0 OHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1	R1166	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R1171 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R1172 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R1173 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1175 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R1177 ERJ3GEYJ373 M 47KOHM,J,1/16W 1 R1178 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R1180 ERJ3GEYJ473 M 0 OHM, 1/16W 1 R1185 TAJAAH0101JV M 100 OHM,J,1/16W 1 R1186 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R1187 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1188 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1189 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1190-97 ERJ3GEY0R00 M 0 OHM, 1/16W 8 R1190 FERJ3GEYJ000 M 0 OHM, 1/16W 1 R1200 TAJAAH0101JV M 100 OHM,J,1/16W 1 R1201 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1201 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1206 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R1206 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R1213 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1214 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1215 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1216 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1217 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1218 ERJ3GEYJ103 M 47KOHM,J,1/16W 1 R1219 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1221 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1214 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1215 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1217 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1218 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1219 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1219 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1219 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1223 ERJ3GEYJ883 M 68KOHM,J,1/16W 1 R1229 ERJ3GEYJ883 M 68KOHM,J,1/16W 1 R1229 ERJ3GEYJ304 M 33KOHM,J,1/16W 1 R1231 ERJ3GEYJ303 M 33KOHM,J,1/16W 1 R1231 ERJ3GEYJ303 M 33KOHM,J,1/16W 1 R1231 ERJ3GEYJ303 M 33KOHM,J,1/16W 1 R1233 ERJ3GEYJ303 M 33KOHM,J,1/16W 1 R1234 ERJ3GEYJ563 M 56KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1	R1168	ERJ3GEY0R00	*	1	
R1172 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R1173 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1175 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R1177 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1178 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R1180 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R1185 TAJAAH0101,V M 100 OHM,J,1/16W 1 R1186 ERJ3GEYJ31 M 330 OHM,J,1/16W 1 R1187 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1188 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1189 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1199 ERJ3GEYJ471 M 10KOHM,J,1/16W 1 R1199 ERJ3GEYJ6W M 0 OHM, 1/16W 1 R1200 TAJAAH0101,V M 100 OHM,J,1/16W 1 R1201 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202-04 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1201 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1201 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1210 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1211 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1212 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1213 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1214 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1215 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1216 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1217 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1221 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1221 ERJ3GEYJ6Y3 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1229 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1221 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1231 ERJ3GEYJ333 M 38KOHM,J,1/16W 1 R1231 ERJ3GEYJ333 M 38KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1	R1170	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1173	R1171	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R1175	R1172	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R1177 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1178 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R1180 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1185 TAJAH0101JV M 100 OHM,J,1/16W 1 R1186 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R1187 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1188 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1189 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1189 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1190-97 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1199 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1200 TAJAAH0101JV M 100 OHM,J,1/16W 1 R1201 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1202-04 ERJ3GEYJ20 M 22 OHM,J,1/16W 3 R1206 ERJ3GEYOR00 M 0 OHM, 1/16W 3 R1207 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1208,09 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1212 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1213 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1214 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1215 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1217 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1218 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1219 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1225 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1226 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1227 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1228 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1229 ERJ3GEYJ104 M 10KOHM,J,1/16W 1 R1221 ERJ3GEYJ104 M 10KOHM,J,1/16W 1 R1223 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1223 ERJ3GEYJ563 M 68KOHM,J,1/16W 1 R1234 ERJ3GEYJ363 M 68KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1	R1173	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1178	R1175	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
R1180 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1185 TAJAAH0101JV M 100 OHM, J,1/16W 1 R1186 ERJ3GEYJ331 M 330 OHM, J,1/16W 1 R1187 ERJ3GEY0R00 M 0 OHM, J,1/16W 1 R1188 ERJ3GEYJ471 M 470 OHM, J,1/16W 1 R1189 ERJ3GEYJ471 M 470 OHM, J,1/16W 1 R1190-97 ERJ3GEY0R00 M 0 OHM, 1/16W 8 R1199 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1200 TAJAAH0101JV M 100 OHM, J,1/16W 1 R1201 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202-04 ERJ3GEYJ220 M 22 OHM, J,1/16W 3 R1206 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1213 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1213 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1214 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R1215 ERJ3GEYJ473 M 47KOHM, J,1/16W 1 R1216 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1219 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1224 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1225 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1226 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1227 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1228 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1229 ERJ3GEYJ683 M 68KOHM, J, 1/16W 1 R1229 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R1229 ERJ3GEYJ683 M 68KOHM, J, 1/16W 1 R1221 ERJ3GEYJ683 M 68KOHM, J, 1/16W 1 R1223 ERJ3GEYJ683 M 68KOHM, J, 1/16W 1 R1231 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R1231 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R1231 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R1233 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R1234 ERJ3GEYJ103 M 33KOHM, J, 1/16W 1 R1234 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM, J, 1/16W 1	R1177	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R1185         TAJAAH0101JV         M 100 OHM,J,1/16W         1           R1186         ERJ3GEYJ331         M 330 OHM,J,1/16W         1           R1187         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R1188         ERJ3GEY0471         M 470 OHM,J,1/16W         1           R1189         ERJ3GEY0R00         M 10KOHM,J,1/16W         1           R1190-97         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R1199         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R1200         TAJAAH0101JV         M 100 OHM, 1/16W         1           R1201         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R1202-04         ERJ3GEYJ220         M 22 OHM,J,1/16W         3           R1206         ERJ3GEYJ0R00         M 0 OHM, 1/16W         1           R1212         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R1213         ERJ3GEYJ473         M 47KOHM,J,1/16W         1           R1214         ERJ3GEYJ473         M 47KOHM,J,1/16W         1           R1215         ERJ3GEYJ472         M 4.7KOHM,J,1/16W         1           R1216         ERJ3GEYJ503         M 10KOHM,J,1/16W         1           R1221         ERJ3GEYJ562 <td>R1178</td> <td>ERJ3GEYJ223</td> <td>M 22KOHM,J,1/16W</td> <td>1</td> <td></td>	R1178	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R1186 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R1187 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1188 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1189 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1190-97 ERJ3GEYOR00 M 0 OHM, 1/16W 8 R1199 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1200 TAJAAH0101JV M 100 OHM,J,1/16W 1 R1201 ERJ3GEYJ220 M 22 OHM,J,1/16W 3 R1202-04 ERJ3GEYJ220 M 22 OHM,J,1/16W 3 R1206 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1201 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1201 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1202 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1210 ERJ3GEYJ470 M 0 OHM, 1/16W 1 R1211 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1212 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1214 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1215 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1216 ERJ3GEYJ472 M 10KOHM,J,1/16W 1 R1221 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1223 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1231 ERJ3GEYJ104 M 10KOHM,J,1/16W 1 R1233 ERJ3GEYJ333 M 33KOHM,J,1/16W 1 R1234 ERJ3GEYJ563 M 56KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1	R1180	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1187 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1188 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1189 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1190-97 ERJ3GEY0R00 M 0 OHM, 1/16W 8 R1199 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1200 TAJAAH0101JV M 100 OHM,J,1/16W 1 R1201 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202-04 ERJ3GEYJ220 M 22 OHM,J,1/16W 3 R1206 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1208 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1219 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1211 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1212 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1213 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1214 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1215 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1219 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1229 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1229 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1223 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1231 ERJ3GEYJ104 M 10KOHM,J,1/16W 1 R1232 ERJ3GEYJ563 M 68KOHM,J,1/16W 1 R1233 ERJ3GEYJ333 M 33KOHM,J,1/16W 1 R1234 ERJ3GEYJ563 M 56KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1	R1185	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1188 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R1189 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1190-97 ERJ3GEY0R00 M 0 OHM, 1/16W 8 R1199 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1200 TAJAAH0101JV M 100 OHM,J,1/16W 1 R1201 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202-04 ERJ3GEYJ220 M 22 OHM,J,1/16W 3 R1206 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1208,09 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R1212 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1213 ERJ3GEYJ102 M 4.7KOHM,J,1/16W 1 R1214 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1215 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1219 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1219 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1225 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1226 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1227 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1228 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1231 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1232 ERJ3GEYJ3683 M 68KOHM,J,1/16W 1 R1233 ERJ3GEYJ383 M 33KOHM,J,1/16W 1 R1234 ERJ3GEYJ363 M 68KOHM,J,1/16W 1 R1234 ERJ3GEYJ563 M 156KOHM,J,1/16W 1 R1234 ERJ3GEYJ563 M 68KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1	R1186	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R1189 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1190-97 ERJ3GEY0R00 M 0 OHM, 1/16W 8 R1199 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1200 TAJAAH0101JV M 100 OHM,J,1/16W 1 R1201 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1202-04 ERJ3GEYJ220 M 22 OHM,J,1/16W 3 R1206 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1208,09 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1212 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1213 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1214 ERJ3GEYJ473 M 4.7KOHM,J,1/16W 1 R1215 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1216 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1219 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1221 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1221 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1225 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1226 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1227 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1228 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1231 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1232 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1233 ERJ3GEYJ333 M 33KOHM,J,1/16W 1 R1234 ERJ3GEYJ333 M 33KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1	R1187	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1190-97       ERJ3GEY0R00       M 0 OHM, 1/16W       8         R1199       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1200       TAJAAH0101JV       M 100 OHM, J,1/16W       1         R1201       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1202-04       ERJ3GEYJ220       M 22 OHM,J,1/16W       3         R1206       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1208,09       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R1212       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1213       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1214       ERJ3GEYJ472       M 4.7KOHM,J,1/16W       1         R1215       ERJ3GEYJ472       M 4.7KOHM,J,1/16W       1         R1216       ERJ3GEYOR00       M 0 OHM, 1/16W       1         R1219       ERJ3GEYOR00       M 0 OHM, 1/16W       1         R1221       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1222       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1224       ERJ3GEYJ5683       M 68KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1231       ERJ3GEYJ683	R1188	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R1199       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1200       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R1201       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1202-04       ERJ3GEYJ220       M 22 OHM,J,1/16W       3         R1206       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1208,09       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R1212       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1213       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1214       ERJ3GEYJ472       M 4.7KOHM,J,1/16W       1         R1215       ERJ3GEYJ472       M 4.7KOHM,J,1/16W       1         R1216       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1219       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1221       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1222       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1224       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1231       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1232       ERJ3GEYJ363	R1189	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1200       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R1201       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1202-04       ERJ3GEY0R00       M 0 OHM, 1/16W       3         R1206       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1208,09       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R1212       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1213       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1214       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1215       ERJ3GEYJ472       M 4.7KOHM,J,1/16W       1         R1216       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1219       ERJ3GEYOR00       M 0 OHM, 1/16W       1         R1221       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1222       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1224       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1231       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ683	R1190-97	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R1201       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1202-04       ERJ3GEYJ220       M 22 OHM,J,1/16W       3         R1206       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1208,09       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R1212       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1213       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1214       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1215       ERJ3GEYJ472       M 4.7KOHM,J,1/16W       1         R1216       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1219       ERJ3GEYOR00       M 0 OHM, 1/16W       1         R1221       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1222       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1224       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1231       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1231       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ683	R1199	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1202-04       ERJ3GEYJ220       M 22 OHM,J,1/16W       3         R1206       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1208,09       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R1212       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1213       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1214       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1215       ERJ3GEYJ472       M 4.7KOHM,J,1/16W       1         R1216       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1219       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1221       ERJ3GEYJ080       M 0 OHM, 1/16W       1         R1222       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1224       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1229       ERJ3GEYJ104       M 100KOHM,J,1/16W       1         R1231       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1232       ERJ3GEYJ333       M 3KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563 <td< td=""><td>R1200</td><td>TAJAAH0101JV</td><td>M 100 OHM,J,1/16W</td><td>1</td><td></td></td<>	R1200	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1202-04       ERJ3GEYJ220       M 22 OHM,J,1/16W       3         R1206       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1208,09       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R1212       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1213       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1214       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1215       ERJ3GEYJ472       M 4.7KOHM,J,1/16W       1         R1216       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1219       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1221       ERJ3GEYJ080       M 0 OHM, 1/16W       1         R1222       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1224       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1229       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1231       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ563 <t< td=""><td>R1201</td><td>ERJ3GEY0R00</td><td>M 0 OHM, 1/16W</td><td>1</td><td></td></t<>	R1201	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1206       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1208,09       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R1212       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1213       ERJ3GEYJ473       M 47KOHM,J,1/16W       1         R1214       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1215       ERJ3GEYJ472       M 4.7KOHM,J,1/16W       1         R1216       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1219       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1221       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1222       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1224       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1227       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1229       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1231       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1232       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ563       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M			M 22 OHM,J,1/16W	3	
R1208,09 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R1212 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1213 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1214 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1215 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1219 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1221 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1227 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1228 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1229 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R1230 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1231 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1232 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1233 ERJ3GEYJ333 M 33KOHM,J,1/16W 1 R1234 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1				+	
R1212 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1213 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1214 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1215 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1219 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1221 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1225 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1226 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1227 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1228 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1229 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1231 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1232 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1233 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1234 ERJ3GEYJ333 M 33KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1				2	
R1213 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R1214 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1215 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1219 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1221 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1225 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1227 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1228 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1229 ERJ3GEYJ080 M 0 OHM, 1/16W 1 R1231 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1232 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1233 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1234 ERJ3GEYJ333 M 33KOHM,J,1/16W 1 R1235 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1			1	+	
R1214 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1215 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1219 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1221 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1227 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1228 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1229 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1229 ERJ3GEYJ704 M 10KOHM,J,1/16W 1 R1231 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1232 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1233 ERJ3GEYJ363 M 68KOHM,J,1/16W 1 R1234 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1235 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1			· ·		
R1215 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R1216 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1219 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1221 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1222 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1224 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1227 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1228 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1229 ERJ3GEYJ700 M 0 OHM, 1/16W 1 R1231 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1232 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1233 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1234 ERJ3GEYJ333 M 33KOHM,J,1/16W 1 R1235 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1				1	
R1216       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1219       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1221       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1222       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1224       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1227       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1229       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1231       ERJ3GEYJ104       M 100KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M 56KOHM,J,1/16W       1				+	
R1219       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1221       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1222       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1224       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1227       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1229       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1231       ERJ3GEYJ104       M 100KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M 56KOHM,J,1/16W       1				-	
R1221       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1222       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1224       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1227       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1229       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1231       ERJ3GEYJ104       M 100KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M 56KOHM,J,1/16W       1				+	
R1222       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1224       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1227       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1229       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1231       ERJ3GEYJ104       M 100KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M 56KOHM,J,1/16W       1			*	-	
R1224 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1227 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R1228 ERJ3GEYJ562 M 5.6KOHM,J,1/16W 1 R1229 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R1231 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R1232 ERJ3GEYJ683 M 68KOHM,J,1/16W 1 R1233 ERJ3GEYJ333 M 33KOHM,J,1/16W 1 R1234 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1				<u> </u>	
R1227       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1229       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1231       ERJ3GEYJ104       M 100KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M 56KOHM,J,1/16W       1			1 1	-	
R1228       ERJ3GEYJ562       M 5.6KOHM,J,1/16W       1         R1229       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1231       ERJ3GEYJ104       M 100KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M 56KOHM,J,1/16W       1				-	
R1229       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R1231       ERJ3GEYJ104       M 100KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M 56KOHM,J,1/16W       1				+	
R1231       ERJ3GEYJ104       M 100KOHM,J,1/16W       1         R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M 56KOHM,J,1/16W       1					
R1232       ERJ3GEYJ683       M 68KOHM,J,1/16W       1         R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M 56KOHM,J,1/16W       1					
R1233       ERJ3GEYJ333       M 33KOHM,J,1/16W       1         R1234       ERJ3GEYJ102       M 1KOHM,J,1/16W       1         R1235       ERJ3GEYJ563       M 56KOHM,J,1/16W       1				-	
R1234 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1				-	
R1235 ERJ3GEYJ563 M 56KOHM,J,1/16W 1				+	
				-	
			' '	+	
R1238 ERJ3GEY0R00 M 0 OHM, 1/16W 1				_	
R1239 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 TH-37/42PE50B				-	  TH-37/42PE50B
R1240 EXB2HV680J RESISTOR ARRAY 1			* *	+	111 077 421 2305
R1241 ERJ3GEYJ182 M 1.8KOHM,J,1/16W 1				-	
R1242,43 ERJ3GEYJ103 M 10KOHM,J,1/16W 2					
R1244 EXB38V680J RESISTOR ARRAY 1				+	
R1246 ERJ3GEYJ102 M 1KOHM,J,1/16W 1					
R1248 ERJ3GEYJ104 M 100KOHM,J,1/16W 1			1 1		
				+	
11 11 11 11 11 11 11 11 11 11 11 11 11					
R1251				-	
R1253				+	
R1255					
R1258				-	
R1259				-	
R1260 TAJAAH0101JV M 100 OHM,J,1/16W 1				-	
R1261   ERJ3GEY0R00   M 0 OHM, 1/16W   1	K1261	EKJ3GEY0K00	IM 0 OHM, 1/16W	1	

•				
R1263	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1266	EXB2HV680J	RESISTOR ARRAY	1	
R1267	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R1268	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1269	EXB2HV680J	RESISTOR ARRAY	1	
R1270	ERJ3GEYJ820	M 82 OHM,J,1/16W	1	
R1271	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1272,73	D1HG5608A002	NETWORK RESISTER	2	
R1274	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1275	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1277	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1280,81	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1283	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R1284	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1285,86	TAJAAH0680JV	M 68 OHM,J,1/16W	1 2	
R1287	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1288	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R1289	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1290	ERJ3GEYJ103	M 10KOHM,J,1/16W	<del>  i</del>	TH-37/42PA50E
R1291-94	TAJAAH0101JV	M 100 OHM,J,1/16W	4	
R1295	ERJ3GEYJ103	M 10KOHM,J,1/16W	$\frac{1}{1}$	
R1297	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1 1	
R1298,99	TAJAAH0101JV	M 100 OHM,J,1/16W	1 2	TH-37/42PE50B
R1300	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	TH-37/42PE50B
R1301	TAJAAH0101JV	M 100 OHM,J,1/16W	1	111-37742FE30B
R1301	ERJ3GEYJ562		<del>                                     </del>	
R1302	-	M 5.6KOHM,J,1/16W		
	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R1305	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R1306	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R1307	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R1308,09	TAJAAH0680JV	M 68 OHM, J, 1/16W	2	
R1311	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
R1313	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1316,17	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R1320	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1321	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R1322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1323,24	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	2	
R1326,27	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1329	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1330,31	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R1332,33	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1334	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R1336,37	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1338	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R1339-41	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R1342	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R1343,44	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	2	
R1345,46	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R1347,48	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R1351	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R1355	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R1359,60	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R1361	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R1365,66	EXB2HV680J	RESISTOR ARRAY	2	
R1372-74	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R1380,81	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R1384	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1389	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
<b>-</b>	+	· · ·		+

1 .	1			
	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2006-11	ERJ6GEYJ223	M 22KOHM,J,1/10W	6	
R2012	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2013,14	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2015,16	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R2018,19	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2021,22	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2023,24	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2025	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2027,28	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2030	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2031	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2032	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2033	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2034	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2035,36	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2037	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2038	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2039	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2040	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
-	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
-	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	TH-37/42PA50E
	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
	ERJ3GEYJ221	M 220 OHM,J,1/16W		TH-37/42PE50B
		M 220 OHM,J,1/16W		TH-37/42PA50E
	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	TH-37/42PA50E
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	77.07.12.7.002
	ERJ3GEY0R00	M 0 OHM, 1/16W	4	TH-37/42PE50B
	TAJAAH0101JV	M 100 OHM,J,1/16W	2	111 677 121 2002
	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
	ERJ3GEYJ273	M 27KOHM,J,1/16W	2	
			1	
	ERJ3GEY0R00	M 0 OHM, 1/16W M 47 OHM,J,1/16W	1	
	TAJAAH0470JV		1	
	ERJ3GEYJ221	M 220 OHM, J, 1/16W		
	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
	ERJ3GEYJ331	M 330 OHM, J, 1/16W	1	
R2164	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	ļ

1				
R2165,66	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2167	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2168,69	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R2170-73	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2174-75	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	TH-37/42PE50B
R2180	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R2182,83	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2184-87	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2190	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	TH-37/42PA50E
R2192,93	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2195,96	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2197	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2198	ERJ6ENF1781	M1.78KOHM, 1/10W	1	
R2199,00	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	TH-37/42PA50E
R2201	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R2202	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2204	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R2205	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	TH-37/42PA50E
R2208	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2209	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R2210	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	TH-37/42PA50E
R2210	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	TH-37/42PE50B
R2211	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	TH-37/42PA50E
R2211	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-37/42PE50B
R2213	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2214	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R2215	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	TH-37/42PA50E
R2215	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-37/42PE50B
R2216	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	TH-37/42PA50E
R2217	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	TH-37/42PA50E
R2224,25	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2302	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2303	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R2304	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2305	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2306	ERJ6GEYJ821	M 820 OHM,J,1/10W	1	
R2307	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2308,09	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	2	
R2310	ERJ3GEYJ184	M 180KOHM,J,1/16W	1	
R2311	ERJ12YJ821	M 820 OHM,J, 1/2W	1	
R2312,13	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2314,15	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R2320	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2321	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R2322	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2323	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2324	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2325	ERJ3GEYJ913	M 91KOHM,J,1/16W	1	
R2326	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2328	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2329	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R2329 R2330	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R2331	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2332	ERJ3GEYJ913	M 91KOHM,J,1/16W	1	
R2335	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2336	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R2337		M 56KOHM,J,1/16W	1	
R2337	ERJ3GEYJ563 ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2339	ERJ3GEYJ913	M 91KOHM,J,1/16W	1	
112000	E1000E10910	110111011101	<del>  '</del>	

Ĭ.	i			
R2342,43	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2344	ERJ3GEYJ913	M 91KOHM,J,1/16W	1	
R2345,46	ERJ3GEYJ563	M 56KOHM,J,1/16W	2	
R2377,78	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2381,82	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2388,89	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R2390	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R2391	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2392	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2393	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2394	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R2395,96	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2397,98	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R2412	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2414	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2444,45	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R2448,49	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
R2450	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2451,52	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
R2453	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2460	ERJ6ENF1373	M 137KOHM, 1/10W	1	
R2461	ERJ6ENF1103	M 110KOHM, 1/10W	1	
R2464,65	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
R2468,69	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	2	
R2488,89	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
R2499	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2516	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2517	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2520	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R2521	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	TH-37/42PE50B
R2524	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	111-377421 E30B
R2525	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R2526	ERJ6GEYJ562	M 5.6KOHM, J,1/10W	1	
R2538	ERJ6ENF4301	M 4.3KOHM, 1/10W	1	TH-37/42PE50B
R2540	ERJ6GEYJ223	M 22KOHM, J,1/10W	1	TH-37/42PE50B
R2542	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	TH-37/42PE30B
			1	
R2545	ERJ6GEYJ101	M 100 OHM,J,1/10W M 0 OHM, 1/10W	1	
R2550	ERJ6GEY0R00	·	-	TH-37/42PE50B
R2552	ERJ6GEY0R00	M 0 OHM, 1/10W	1	1H-37/42PE50B
R2553	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2557	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R3001-15	ERJ6ENF75R0	M 75 OHM, 1/10W	15	
R3016,17	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3018,19	ERJ6GEYJ680	M 68 OHM,J,1/10W	2	
R3020-22	ERJ6ENF2202	M 2.2KOHM, 1/10W	3	
R3023,24	ERJ6ENF1202	M 12KOHM, 1/10W	2	
R3025	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3026	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3027,28	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R3030	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R3031	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3032,33	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
R3034	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3036,37	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R3038-40	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R3041,42	ERJ3GEYJ182	M 1.8KOHM,J,1/16W	2	
R3043	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3044,45	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3047	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	1	· · · · · · · · · · · · · · · · · · ·	•	-

R3048   ERJ3GEYJ152   M 1.5KOHM,J,1/16W   1   R3049-51   ERJ3GEYJ103   M 10KOHM,J,1/16W   3	
R3040_51   FR   3GEV   103   N/ 10KOHM   1/16\N/   2	
R3052 ERJ3GEY0R00 M 0 OHM, 1/16W 1	
R3053 ERJ3GEYJ221 M 220 OHM,J,1/16W 1	
R3054,55 ERJ3EKF5600 M 560 OHM, 1/16W 2	
R3056 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	
R3059-61 ERJ3GEYJ221 M 220 OHM,J,1/16W 3	
R3064 ERJ3GEYJ221 M 220 OHM,J,1/16W 1	
R3065 ERJ3GEYJ682 M 6.8KOHM,J,1/16W 1	
R3066 ERJ3GEY0R00 M 0 OHM, 1/16W 1	
R3067 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	
R3069   ERJ3GEYJ103   M 10KOHM,J,1/16W   1	
R3071   ERJ3GEYJ103   M 10KOHM,J,1/16W   1	
R3074,75   ERJ3GEYJ221   M 220 OHM,J,1/16W   2	
R3077   ERJ3GEYJ221   M 220 OHM,J,1/16W   1	
R3086   ERJ3GEY0R00   M 0 OHM, 1/16W   1	
R3087   ERJ3GEYJ221   M 220 OHM,J,1/16W   1	
R3088   ERJ3GEYJ221   M 220 OHM,J,1/16W   1   TH-37/42PE	50B
R3089,90 TAJAAH0470JV M 47 OHM,J,1/16W 2	
R3092 ERJ3GEYJ221 M 220 OHM,J,1/16W 1	
R3094-01 ERJ3GEYJ221 M 220 OHM,J,1/16W 8	
R3115 TAJAAH0101JV M 100 OHM,J,1/16W 1	
R3118 TAJAAH0101JV M 100 OHM,J,1/16W 1	
R3121 ERJ3EKF1000 M 100 OHM, 1/16W 1	
R3122 TAJAAH0101JV M 100 OHM,J,1/16W 1	
R3123 ERJ3EKF82R0 M 82 OHM, 1/16W 1	
R3125 ERJ6GEYJ102 M 1KOHM,J,1/10W 1	
R3126 TAJAAH0101JV M 100 OHM,J,1/16W 1	
R3127 ERJ6GEYJ102 M 1KOHM,J,1/10W 1	
R3130,31 TAJAAH0101JV M 100 OHM,J,1/16W 2	
R3132,33 ERJ3GEYJ103 M 10KOHM,J,1/16W 2	
R3134 ERJ3GEYJ333 M 33KOHM,J,1/16W 1	
R3136 ERJ3GEYJ333 M 33KOHM,J,1/16W 1	
R3138 ERJ3EKF82R0 M 82 OHM, 1/16W 1	
R3139 ERJ6GEYJ102 M 1KOHM,J,1/10W 1	
R3140 ERJ3EKF1000 M 100 OHM, 1/16W 1	
R3141 ERJ6GEYJ102 M 1KOHM,J,1/10W 1	
R3143 ERJ3GEYJ222 M 2.2KOHM,J,1/16W 1	
R3144 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1	
R3145 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	
R3146 ERJ3GEYJ331 M 330 OHM,J,1/16W 1	
R3152,53 TAJAAH0470JV M 47 OHM,J,1/16W 2	
R3158 TAJAAH0101JV M 100 OHM,J,1/16W 1	
R3159 ERJ3GEYJ223 M 22KOHM,J,1/16W 1	
R3161 ERJ3GEY0R00 M 0 OHM, 1/16W 1	
R3163 ERJ6ENF1202 M 12KOHM, 1/10W 1	
R3164 ERJ3GEYJ105 M 1MOHM,J,1/16W 1	
R3206 TAJAAH0101JV M 100 OHM,J,1/16W 1	
R3213-22 ERJ3GEY0R00 M 0 OHM, 1/16W 10	
R3224-29 ERJ3GEY0R00 M 0 OHM, 1/16W 6	
·	
R3401-07 ERJ6GEY0R00 M 0 OHM, 1/10W 7 R3750 ERJ6ENF6802 M 68KOHM, 1/10W 1	
R3751	
R3752	
R3753	
R3754	
R4001   ERJ3GEY0R00   M 0 OHM, 1/16W   1	

R4009 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4014 ERJ3EKF1500 M 150 OHM, 1/16W 1 R4016,17 ERJ3EKF5760 M 576 OHM, 1/16W 2 R4027 ERJ3EKF1500 M 150 OHM, 1/16W 1 R4029,30 ERJ3EKF1581 M1.58KOHM, 1/10W 1 R4031 ERJ3EKF4220 M 422 OHM, 1/10W 1 R4033 ERJ3EKF4220 M 590 OHM, 1/10W 1 R4033 ERJ3EKF201 M 590 OHM, 1/10W 1 R4037 ERJ3EKF5600 M 560 OHM, 1/16W 1 R4039 ERJ3EKF4220 M 422 OHM, 1/10W 1 R40403 ERJ3EKF420 M 422 OHM, 1/10W 1 R40404 ERJ3EKF201 M 1KOHM, J, 1/10W 1 R4041 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R4046 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R4046 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R4047 ERJ3EKF5600 M 560 OHM, 1/16W 1 R4050 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R4050 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R4050 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R4051, 52 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4054 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4055 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4056, 57 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R4058 ERJ3EKF2000 M 0 OHM, 1/16W 1 R4059 ERJ3EKF3000 M 0 OHM, 1/16W 1 R4058 ERJ3EKF3000 M 0 OHM, 1/16W 1 R4059 ERJ3EKF3000 M 0 OHM, 1/16W 1 R4068 ERJ3EKF301 M 1KOHM, J, 1/10W 1 R4068 ERJ3EKF1691 M 17.4 OHM, 1/16W 1 R4068 ERJ3EKF1691 M 17.4 OHM, 1/16W 1 R4075 ERJ3GEYUR00 M 0 OHM, 1/16W 1 R4068 ERJ3EKF1691 M 17.4 OHM, 1/16W 1 R4075 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4075 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4075 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4076 ERJ3GEYJ220 R2 OHM, J, 1/16W 1 R4077 EXB3SW220J RESISTOR ARRAY 2 R4078 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4079-81 EXB3SW220J RESISTOR ARRAY 3	
R4016,17         ERJ3EKF5760         M 576 OHM, 1/16W         2           R4027         ERJ3EKF1500         M 150 OHM, 1/16W         1           R4029,30         ERJ3EKF1581         M1.58KOHM, 1/10W         2           R4031         ERJ3EKF4220         M 422 OHM, 1/10W         1           R4033         ERJ3EKF2201         M 590 OHM, 1/10W         1           R4033         ERJ3EKF5000         M 590 OHM, 1/16W         2           R4037         ERJ3EKF5000         M 560 OHM, 1/16W         1           R4039         ERJ3EKF5200         M 560 OHM, 1/10W         1           R4041         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R40441         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R4045         ERJ3EKF2201         M 590 OHM, 1/10W         1           R4046         ERJ3EKF2201         M 590 OHM, 1/10W         1           R4047         ERJ3EKF2010         M 1KOHM,J,1/10W         1           R4049         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4051,52         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4053         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R4054         ERJ3GEY0R00 <td></td>	
R4027         ERJ3EKF1500         M 150 OHN, 1/16W         1           R4029,30         ERJ3EKF1581         M1.58KOHM, 1/10W         2           R4031         ERJ3EKF4220         M 422 OHM, 1/10W         1           R4033         ERJ3EKF2201         M 590 OHM, 1/10W         1           R4035,36         ERJ3EKF3001         M 3KOHM, 1/16W         2           R4037         ERJ3EKF5600         M 560 OHM, 1/16W         1           R4039         ERJ3EKF4220         M 422 OHM, 1/10W         1           R4041         ERJ6GEYJ102         M 1KOHM, 1/10W         1           R4043,44         ERJ6GEYJ102         M 1KOHM, 1/10W         1           R4045         ERJ3EKF2201         M 590 OHM, 1/10W         1           R4046         ERJ3GEKF2201         M 590 OHM, 1/16W         1           R4047         ERJ3GEYOR00         M 1KOHM, J,1/10W         1           R4049         ERJ3GEYOR00         M 0 OHM, 1/16W         1           R4051,52         ERJ3GEYOR00         M 0 OHM, 1/16W         1           R4053         ERJ6GEYJ102         M 1KOHM, J,1/10W         1           R4054         ERJ3GEYOR00         M 0 OHM, 1/16W         1           R4055         ERJ3GEYOR00 <td></td>	
R4029,30 ERJ3EKF1581 M1.58KOHM, 1/10W 2 R4031 ERJ3EKF4220 M 422 OHM, 1/10W 1 R4033 ERJ3EKF2201 M 590 OHM, 1/10W 1 R4035,36 ERJ3EKF3001 M 3KOHM, 1/16W 2 R4037 ERJ3EKF5600 M 560 OHM, 1/16W 1 R4039 ERJ3EKF4220 M 422 OHM, 1/10W 1 R4041 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4043,44 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4045 ERJ3EKF2201 M 590 OHM, 1/10W 1 R4046 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4047 ERJ3EKF5600 M 560 OHM, 1/16W 1 R4048 ERJ3GEYJ02 M 1KOHM,J,1/10W 1 R4049 ERJ3GEYJ102 M 1KOHM,J,1/10W 1 R4050 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4051,52 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4053 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4054 ERJ3EKF1600 M 160 OHM, 1/16W 2 R4055 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4056 ERJ3GEYJ102 M 1KOHM,J,1/10W 1 R4056 ERJ3GEYJ102 M 1KOHM,J,1/10W 1 R4056 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4066 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4068 ERJ3EKF302 M 43KOHM, 1/16W 1 R4069 ERJ3EKF302 M 43KOHM, 1/16W 1 R4068 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4068 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4069-72 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4075 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4078 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	
R4031       ERJ3EKF4220       M 422 OHM, 1/10W       1         R4033       ERJ3EKF2201       M 590 OHM, 1/10W       1         R4035,36       ERJ3EKF3001       M 3KOHM, 1/16W       2         R4037       ERJ3EKF5600       M 560 OHM, 1/16W       1         R4039       ERJ3EKF4220       M 422 OHM, 1/10W       1         R4041       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4043,44       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4045       ERJ3EKF2201       M 590 OHM, 1/10W       1         R4046       ERJ3GEYJ102       M 1KOHM,J,1/10W       1         R4047       ERJ3EKF5600       M 560 OHM, 1/16W       1         R4049       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4050       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4051,52       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4053       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4069       ERJ3EKF1371       M	
R4033 ERJ3EKF2201 M 590 OHN, 1/10W 1 R4035,36 ERJ3EKF3001 M 3KOHM, 1/16W 2 R4037 ERJ3EKF5600 M 560 OHM, 1/16W 1 R4039 ERJ3EKF4220 M 422 OHM, 1/10W 1 R4041 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4043,44 ERJ6GEYJ102 M 1KOHM,J,1/10W 2 R4045 ERJ3EKF2201 M 590 OHM, 1/10W 1 R4046 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4047 ERJ3EKF5600 M 560 OHM, 1/16W 1 R4050 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4051,52 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R4053 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4054 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4055 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4056,57 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4059 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4059 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4060 ERJ3EKF4302 M 45KOHM, 1/16W 1 R4060 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4062 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4064 ERJ3EKF1691 M 17.4 OHM, 1/16W 1 R4068 ERJ3EKF1691 M 17.4 OHM, 1/16W 1 R4067 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4075 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4076,77 EXB38V220J RESISTOR ARRAY 2 R4078 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	
R4035,36         ERJ3EKF3001         M 3KOHM, 1/16W         2           R4037         ERJ3EKF5600         M 560 OHM, 1/16W         1           R4039         ERJ3EKF4220         M 422 OHM, 1/10W         1           R4041         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R4043,44         ERJ6GEYJ102         M 1KOHM,J,1/10W         2           R4045         ERJ3EKF2201         M 590 OHM, 1/10W         1           R4046         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R4047         ERJ3EKF5600         M 560 OHM, 1/16W         1           R4049         ERJ3GEYOR00         M 0 OHM, 1/16W         1           R4050         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R4051,52         ERJ3GEY0R00         M 0 OHM, 1/16W         2           R4053         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R4054         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4055         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4058         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4059         ERJ3EKF4302         M 43KOHM, 1/16W         1           R4060         ERJ3EKF3702	
R4037         ERJ3EKF5600         M 560 OHM, 1/16W         1           R4039         ERJ3EKF4220         M 422 OHM, 1/10W         1           R4041         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R4043,44         ERJ6GEYJ102         M 1KOHM,J,1/10W         2           R4045         ERJ3EKF2201         M 590 OHM, 1/10W         1           R4046         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R4047         ERJ3EKF5600         M 560 OHM, 1/16W         1           R4049         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4050         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R4051,52         ERJ3GEY0R00         M 0 OHM, 1/16W         2           R4053         ERJ6GEYJ102         M 1KOHM,J,1/10W         1           R4054         ERJ3EKF1600         M 160 OHM, 1/16W         1           R4055         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4058         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4059         ERJ3EKF4302         M 43KOHM, 1/16W         1           R4060         ERJ3EKF371         M 13.7 OHM, 1/16W         1           R4064         ERJ3GEYJ220	
R4039 ERJ3EKF4220 M 422 OHM, 1/10W 1 R4041 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4043,44 ERJ6GEYJ102 M 1KOHM,J,1/10W 2 R4045 ERJ3EKF2201 M 590 OHM, 1/10W 1 R4046 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4047 ERJ3EKF5600 M 560 OHM, 1/16W 1 R4049 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4050 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4051,52 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R4053 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4054 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4055 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4056,57 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R4058 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4059 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4059 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4060 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4062 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4064 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4068 ERJ3EKF1691 M 17.4 OHM, 1/16W 1 R4069-72 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4075 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4076,77 EXB38V220J RESISTOR ARRAY 2 R4078 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	
R4041       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4043,44       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4045       ERJ3EKF2201       M 590 OHM, 1/10W       1         R4046       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4047       ERJ3EKF5600       M 560 OHM, 1/16W       1         R4049       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4050       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4051,52       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4053       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4060       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4075       ERJ3GEYJ220 <td< td=""><td></td></td<>	
R4043,44       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4045       ERJ3EKF2201       M 590 OHM, 1/10W       1         R4046       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4047       ERJ3EKF5600       M 560 OHM, 1/16W       1         R4049       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4050       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4051,52       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4053       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J	
R4045       ERJ3EKF2201       M 590 OHM, 1/10W       1         R4046       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4047       ERJ3EKF5600       M 560 OHM, 1/16W       1         R4049       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4050       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4051,52       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4053       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076       FXB38V220J	
R4046       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4047       ERJ3EKF5600       M 560 OHM, 1/16W       1         R4049       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4050       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4051,52       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4053       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4068       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M	
R4047       ERJ3EKF5600       M 560 OHM, 1/16W       1         R4049       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4050       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4051,52       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4053       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       <	
R4049       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4050       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4051,52       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4053       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4050       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4051,52       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4053       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4051,52       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4053       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4053       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4054       ERJ3EKF1600       M 160 OHM, 1/16W       1         R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4055       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4056,57       ERJ6GEYJ102       M 1KOHM,J,1/10W       2         R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4058       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4059       ERJ3EKF2702V       M27.0KOHM, 1/16W       1         R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4060       ERJ3EKF4302       M 43KOHM, 1/16W       1         R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4062       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4064       ERJ3EKF1371       M 13.7 OHM, 1/16W       1         R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4068       ERJ3EKF1691       M 17.4 OHM, 1/16W       1         R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4069-72       ERJ3GEYJ220       M 22 OHM,J,1/16W       4         R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4075       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4076,77       EXB38V220J       RESISTOR ARRAY       2         R4078       ERJ3GEYJ220       M 22 OHM,J,1/16W       1	
R4076,77         EXB38V220J         RESISTOR ARRAY         2           R4078         ERJ3GEYJ220         M 22 OHM,J,1/16W         1	
R4078 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	
11010 01  21200  12001010101111111111111	
R4082-84 ERJ3GEYJ220 M 22 OHM,J,1/16W 3	
R4085   ERJ3GEYJ103   M 10KOHM,J,1/16W   1	
R4086-88 ERJ3GEY0R00 M 0 OHM, 1/16W 3	
R4091-94 ERJ3GEY0R00 M 0 OHM, 1/16W 4	
R4100 ERJ3GEYJ183 M 18KOHM,J,1/16W 1	
R4101 ERJ3GEYJ822 M 8.2KOHM,J,1/16W 1	
R4102 ERJ3GEYJ183 M 18KOHM,J,1/16W 1	
R4103 ERJ3GEYJ822 M 8.2KOHM,J,1/16W 1	
R4104 ERJ3GEYJ183 M 18KOHM,J,1/16W 1	
R4106 ERJ3GEYJ822 M 8.2KOHM,J,1/16W 1	
R4107-09 ERJ3GEYJ330 M 33 OHM,J,1/16W 3	
R4110 ERJ3GEYJ751 M 750 OHM,J,1/16W 1	
R4111 ERJ3EKF5601 M 5.6KOHM, 1/16W 1	
R4112 ERJ3GEYJ751 M 750 OHM,J,1/16W 1	
R4113 ERJ3EKF5601 M 5.6KOHM, 1/16W 1	
R4117	
R4118	
R4120	
R4123	
R4125-27 ERJ6GEYJ471 M 470 OHM,J,1/10W 3	
R4128	
R4130	
R4132	
R4134-36 TAJAAH0680JV M 68 OHM,J,1/16W 3	

1	ı		
	ERJ3GEYJ330	M 33 OHM,J,1/16W	3
R4140	ERJ3GEYJ103	M 10KOHM,J,1/16W	1
R4143	ERJ3GEY0R00	M 0 OHM, 1/16W	1
R4144-46	ERJ3GEYJ471	M 470 OHM,J,1/16W	3
R4147-49	ERJ3GEYJ153	M 15KOHM,J,1/16W	3
R4150	ERJ3GEY0R00	M 0 OHM, 1/16W	1
R4151,52	ERJ3EKF2200	M 220 OHM, 1/16W	2
R4153	ERJ3EKF1020	M 102 OHM, 1/16W	1
R4154	ERJ3GEYJ220	M 22 OHM,J,1/16W	1
R4155	ERJ3GEYJ103	M 10KOHM,J,1/16W	1
R4157,58	ERJ3GEYJ220	M 22 OHM,J,1/16W	2
R4159	ERJ3EKF1200	M 120 OHM, 1/16W	1
R4160	ERJ3EKF1020	M 102 OHM, 1/16W	1
R4161	ERJ3EKF1200	M 120 OHM, 1/16W	1
R4163	ERJ3GEY0R00	M 0 OHM, 1/16W	1
R4165	TAJAAH0680JV	M 68 OHM,J,1/16W	1
R4167	ERJ3GEY0R00	M 0 OHM, 1/16W	1
R4169	ERJ3GEY0R00	M 0 OHM, 1/16W	1
R4173	ERJ3GEYJ271	M 270 OHM,J,1/16W	1
R4174,75	ERJ3GEY0R00	M 0 OHM, 1/16W	2
R4177	TAJAAH0680JV	M 68 OHM,J,1/16W	1
R4182	ERJ3GEY0R00	M 0 OHM, 1/16W	1
R4184	TAJAAH0680JV	M 68 OHM,J,1/16W	1
R4186	ERJ3GEY0R00	M 0 OHM, 1/16W	1
R4188	ERJ3GEY0R00	M 0 OHM, 1/16W	1
R4194-97	TAJAAH0680JV	M 68 OHM,J,1/16W	4
R4199	ERJ3EKF1200	M 120 OHM, 1/16W	1
R4203	ERJ3EKF1020	M 102 OHM, 1/16W	1
R4204	ERJ3GEYJ510	M 51 OHM,J,1/16W	1
R4207	ERJ3EKF1500	M 150 OHM, 1/16W	1
R4208	ERJ3GEYJ510	M 51 OHM,J,1/16W	1
R4209	ERJ3EKF2200	M 220 OHM, 1/16W	1
R4210	TAJAAH0101JV	M 100 OHM,J,1/16W	1
R4211	ERJ3GEY0R00	M 0 OHM, 1/16W	1
R4228	ERJ3GEY0R00	M 0 OHM, 1/16W	1
	ERJ3GEY0R00	M 0 OHM, 1/16W	3
R4244	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1
R4249	EXB38V680J	RESISTOR ARRAY	1
R4253	EXB38V680J	RESISTOR ARRAY	1
R4255	ERJ3GEY0R00	M 0 OHM, 1/16W	1
R4259	EXB38V680J	RESISTOR ARRAY	1
R4379,80	ERJ3GEYJ220	M 22 OHM,J,1/16W	2
R4381-83	ERJ3GEYJ221	M 220 OHM,J,1/16W	3
R4501	TAJAAH0470JV	M 47 OHM,J,1/16W	1
R4502	ERJ3GEYJ103	M 10KOHM,J,1/16W	1
R4503	ERJ3EKF1202	M 12KOHM, 1/16W	1
R4504	ERJ3EKF1800	M 180 OHM, 1/16W	1
R4505	ERJ3EKF2001	M 2KOHM, 1/16W	1
R4506	ERJ3EKF4302	M 43KOHM, 1/16W	1
	ERJ3GEYJ220	M 22 OHM,J,1/16W	2
		· · · ·	
	ERJ3GEY0R00	M 0 OHM, 1/16W M 17.4 OHM, 1/16W	5 2
R4515,16	ERJ3EKF1741		2
	ERJ3GEY0R00	M 0 OHM, 1/16W	2
R4520,21	ERJ3GEYJ103	M 10KOHM, J, 1/16W	
R4522	ERJ3GEYJ750	M 75 OHM, J,1/16W	1
R4523,24	ERJ3GEY0R00	M 0 OHM, 1/16W	2
R4525	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1
R4526	TAJAAH0470JV	M 47 OHM, J, 1/16W	1
R4527	ERJ3GEYJ393	M 39KOHM,J,1/16W	1

R4528         ERJ3EKF1001         M 1KOHM, 1/16W         1           R4529,30         ERJ3GEYJ103         M 10KOHM,J,1/16W         2           R4531,32         TAJAAH0101JV         M 100 OHM, J,1/16W         2           R4533         ERJ3EKF9100         M 910 OHM, 1/16W         1           R4534,35         ERJ3GEYJ220         M 22 OHM,J,1/16W         2           R4538,39         D1HG1038A002         NETWORK RESISTER         2           R4540-46         ERJ3GEYJ103         M 10KOHM,J,1/16W         7           R4575,76         ERJ3GEYOR00         M 0 OHM, 1/16W         2           R4583-03         TAJAAH0680JV         M 68 OHM,J,1/16W         2           R4604-06         EXB38V680J         RESISTOR ARRAY         3           R4609         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4610-13         TAJAAH0680JV         M 68 OHM,J,1/16W         4           R4614-17         EXB2HV680J         RESISTOR ARRAY         1           R4661         EXB3EY0R00         M 0 OHM, 1/16W         1           R4659         TAJAAH0680JV         M 68 OHM,J,1/16W         1           R4662,63         ERJ3GEYJ220         M 22 OHM,J,1/16W         1           R4661	
R4531,32       TAJAAH0101JV       M 100 OHM, J,1/16W       2         R4533       ERJ3EKF9100       M 910 OHM, 1/16W       1         R4534,35       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4538,39       D1HG1038A002       NETWORK RESISTER       2         R4576-46       ERJ3GEY0103       M 10KOHM,J,1/16W       7         R4575,76       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4577,78       TAJAAH0680JV       M 68 OHM,J,1/16W       2         R4583-03       TAJAAH0680JV       M 68 OHM,J,1/16W       21         R4604-06       EXB38V680J       RESISTOR ARRAY       3         R4609       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4610-13       TAJAAH0680JV       M 68 OHM,J,1/16W       4         R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671	
R4533         ERJ3EKF9100         M 910 OHM, 1/16W         1           R4534,35         ERJ3GEYJ220         M 22 OHM,J,1/16W         2           R4538,39         D1HG1038A002         NETWORK RESISTER         2           R4540-46         ERJ3GEYJ103         M 10KOHM,J,1/16W         7           R4575,76         ERJ3GEY0R00         M 0 OHM, 1/16W         2           R4577,78         TAJAAH0680JV         M 68 OHM,J,1/16W         2           R4583-03         TAJAAH0680JV         M 68 OHM,J,1/16W         21           R4604-06         EXB38V680J         RESISTOR ARRAY         3           R4609         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4610-13         TAJAAH0680JV         M 68 OHM,J,1/16W         4           R4611-17         EXB2HV680J         RESISTOR ARRAY         4           R4618         EXB38V680J         RESISTOR ARRAY         1           R4620         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4659         TAJAAH0680JV         M 68 OHM,J,1/16W         1           R4661         TAJAAH0680JV         M 68 OHM,J,1/16W         1           R4664         TAJAAH0101JV         M 100 OHM,J,1/16W         2           R4664	
R4534,35       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4538,39       D1HG1038A002       NETWORK RESISTER       2         R4540-46       ERJ3GEYJ103       M 10KOHM,J,1/16W       7         R4575,76       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4577,78       TAJAAH0680JV       M 68 OHM,J,1/16W       2         R4583-03       TAJAAH0680JV       M 68 OHM,J,1/16W       21         R4604-06       EXB38V680J       RESISTOR ARRAY       3         R4609       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4610-13       TAJAAH0680JV       M 68 OHM,J,1/16W       4         R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4619       EXB2HV680J       RESISTOR ARRAY       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73 <td< td=""><td></td></td<>	
R4538,39       D1HG1038A002       NETWORK RESISTER       2         R4540-46       ERJ3GEYJ103       M 10KOHM,J,1/16W       7         R4575,76       ERJ3GEYOR00       M 0 OHM, 1/16W       2         R4577,78       TAJAAH0680JV       M 68 OHM,J,1/16W       2         R4583-03       TAJAAH0680JV       M 68 OHM,J,1/16W       21         R4604-06       EXB38V680J       RESISTOR ARRAY       3         R4609       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4610-13       TAJAAH0680JV       M 68 OHM,J,1/16W       4         R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02 <t< td=""><td></td></t<>	
R4540-46       ERJ3GEYJ103       M 10KOHM,J,1/16W       7         R4575,76       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4577,78       TAJAAH0680JV       M 68 OHM,J,1/16W       2         R4583-03       TAJAAH0680JV       M 68 OHM,J,1/16W       21         R4604-06       EXB38V680J       RESISTOR ARRAY       3         R4609       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4610-13       TAJAAH0680JV       M 68 OHM,J,1/16W       4         R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4619       EXB2HV680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3E	
R4575,76       ERJ3GEY0R00       M 0 OHM, 1/16W       2         R4577,78       TAJAAH0680JV       M 68 OHM,J,1/16W       2         R4583-03       TAJAAH0680JV       M 68 OHM,J,1/16W       21         R4604-06       EXB38V680J       RESISTOR ARRAY       3         R4609       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4610-13       TAJAAH0680JV       M 68 OHM,J,1/16W       4         R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4619       EXB2HV680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3EKF3002       M 30KOHM, 1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4577,78       TAJAAH0680JV       M 68 OHM,J,1/16W       2         R4583-03       TAJAAH0680JV       M 68 OHM,J,1/16W       21         R4604-06       EXB38V680J       RESISTOR ARRAY       3         R4609       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4610-13       TAJAAH0680JV       M 68 OHM,J,1/16W       4         R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4619       EXB2HV680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4583-03       TAJAAH0680JV       M 68 OHM,J,1/16W       21         R4604-06       EXB38V680J       RESISTOR ARRAY       3         R4609       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4610-13       TAJAAH0680JV       M 68 OHM,J,1/16W       4         R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4619       EXB2HV680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4604-06       EXB38V680J       RESISTOR ARRAY       3         R4609       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4610-13       TAJAAH0680JV       M 68 OHM,J,1/16W       4         R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4619       EXB2HV680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4609       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4610-13       TAJAAH0680JV       M 68 OHM,J,1/16W       4         R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4619       EXB2HV680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4610-13       TAJAAH0680JV       M 68 OHM,J,1/16W       4         R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4619       EXB2HV680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4614-17       EXB2HV680J       RESISTOR ARRAY       4         R4618       EXB38V680J       RESISTOR ARRAY       1         R4619       EXB2HV680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4618       EXB38V680J       RESISTOR ARRAY       1         R4619       EXB2HV680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4619       EXB2HV680J       RESISTOR ARRAY       1         R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4620       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4659       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4661       TAJAAH0680JV       M 68 OHM,J,1/16W       1         R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4662,63       ERJ3GEYJ220       M 22 OHM,J,1/16W       2         R4664       TAJAAH0101JV       M 100 OHM,J,1/16W       1         R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4671       EXB38V680J       RESISTOR ARRAY       1         R4672,73       ERJ3GEYJ103       M 10KOHM,J,1/16W       2         R4701,02       ERJ3EKF3002       M 30KOHM, 1/16W       2	
R4701,02 ERJ3EKF3002 M 30KOHM, 1/16W 2	
R4701,02 ERJ3EKF3002 M 30KOHM, 1/16W 2	
R4706-10 ERJ3GEY0R00 M 0 OHM, 1/16W 5	
R4756-58 ERJ3GEYJ330 M 33 OHM,J,1/16W 3	
R4759 ERJ3GEYJ510 M 51 OHM,J,1/16W 1	
R4760 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	
R4762 ERJ3GEYJ330 M 33 OHM,J,1/16W 1	
R4763 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	
R4766 ERJ3GEY0R00 M 0 OHM, 1/16W 1	
R4768 ERJ3GEY0R00 M 0 OHM, 1/16W 1	
R4769 ERJ3GEYJ151 M 150 OHM,J,1/16W 1	
R4802 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	
R4805 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	
R4807,08 ERJ3GEYJ223 M 22KOHM,J,1/16W 2	
R4810 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	
R4821-23 EXB38VR000 RESISTOR ARRAY 3	
R4834 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	
R4841,42 EXB2HV220JV RESISTOR ARRAY 2 TH-37/42PE50B	
R4844 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 TH-37/42PE50B	
R4845-47 ERJ3GEY0R00 M 0 OHM, 1/16W 3 TH-37/42PE50B	
R4851 ERJ3GEYJ821 M 820 OHM,J,1/16W 1	
R4884 ERJ3GEY0R00 M 0 OHM, 1/16W 1	
R4887,88 ERJ3GEY0R00 M 0 OHM, 1/16W 2	
R4897 ERJ3GEY0R00 M 0 OHM, 1/16W 1	
R4911 ERJ3GEY0R00 M 0 OHM, 1/16W 1 TH-37/42PE50B	
R4914-16 ERJ3GEY0R00 M 0 OHM, 1/16W 3 TH-37/42PE50B	
R4918,19 ERJ3GEY0R00 M 0 OHM, 1/16W 2	
R4928-39 ERJ3GEY0R00 M 0 OHM, 1/16W 12	
R4943	
R4944,45	
R4946 TAJAAH0101JV M 100 OHM,J,1/16W 1	
R4947	
R4948,49   ERJ3EKF3002   M 30KOHM, 1/16W   2	

R4950 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 TH-37/42PA50E R4951 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4952 ERJ3GEY0R00 M 0 OHM, 1/16W 3 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5606 ERJ6GEYJ223 M 22KOHM, J,1/10W 1 R5607 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5611 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5612 ERJ6GEYJ223 M 22KOHM, 1/10W 1 R5613 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5614 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5615 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5616 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5611 ERJ6GEYJ223 M 22KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 2 R5617,18 ERJ6GEYJ221 M 220 OHM, J,1/10W 2 R5621 ERJ6GEYJ221 M 220 OHM, J,1/10W 2 R5622 ERJ6GEYJ03 M 10KOHM, J,1/10W 1 R5630 ERJ6GEYJ03 M 10KOHM, J,1/10W 1 R5631 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5632 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 3 R5633 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5636 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5631 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5632 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5633 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5634 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5636 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5636 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5636 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5637,38 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5641 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5642 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5643 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5645 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5648 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5649 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5648 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5649 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5655-56 ERJ6GEYJ200 M 0 OHM, 1/10W 1 R5656-566-56 ERJ6GEYJ00 M 0 OHM, 1/10W 1 R5656-566-566EYJ00 M 0 OHM, 1/10W 1	
R4952 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 R4953-55 ERJ3GEY0R00 M 0 OHM, 1/16W 3 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF4550 M 255 OHM, 1/10W 1 R5606 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R5607 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5614 ERJ6ENF1652 M16.5KOHM, 1/10W 2 R5615,16 ERJ6GEYJ223 M 22KOHM,J,1/10W 2 R5617,18 ERJ6GEYJ221 M 220 OHM,J,1/10W 2 R5621 ERJ6ENF103 M 10KOHM,J,1/10W 1 R56622 ERJ6GEYJ010 M 0 OHM, 1/10W 2 R56630 ERJ6GEYJ101 M 10 OHM, 1/10W 1 R5633 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5633 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5635 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5637,38 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5637,38 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5630 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5631 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5632 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5633 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5635 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5637,38 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5638 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5644 ERJ6GEYJ422 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5644 ERJ6GEYJ422 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ422 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ221 M 2.2COHM,J,1/10W 1 R5648 ERJ6GEYJ221 M 2.2COHM,J,1/10W 1 R5649 ERJ6GEYJ221 M 2.2COHM,J,1/10W 1 R56640 ERJ6GEYJ221 M 2.2COHM,J,1/10W 1	
R4953-55         ERJ3GEY0R00         M 0 OHM, 1/16W         3           R5601         ERJ6ENF4532         M4.53KOHM, 1/10W         1           R5603         ERJ6ENF2550         M 255 OHM, 1/10W         1           R5605         ERJ6GEYJ223         M 22KOHM, J/1/10W         1           R5606         ERJ6GEYJ123         M 10KOHM, J/1/10W         1           R5607         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5609         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5610         ERJ6GEYJ103         M 10KOHM,J/1/10W         1           R5611         ERJ6GEYJ223         M 22KOHM, 1/10W         1           R5612         ERJ6GEYJ223         M 22KOHM,J/1/10W         1           R5615,16         ERJ6GEYJ223         M 22KOHM,J/1/10W         2           R5617,18         ERJ6GEYJ221         M 220 OHM,J/1/10W         2           R5621         ERJ6GEYJ421         M 220 OHM,J/1/10W         1           R5623,24         ERJ6GEYJ472         M 4.7KOHM,J/1/10W         1           R5630         ERJ6GEYJ471         M 470 OHM,J/1/10W         1           R5632         ERJ6GEYJ471         M 470 OHM,J/1/10W         1           R5634	
R5601         ERJ6ENF4532         M4.53KOHM, 1/10W         1           R5603         ERJ6ENF2550         M 255 OHM, 1/10W         1           R5605         ERJ6GEYJ223         M 255 OHM, 1/10W         1           R5606         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R5607         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5609         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5610         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R5611         ERJ6GEYJ202         M 82KOHM, 1/10W         1           R5612         ERJ6ENF8202         M 82KOHM, 1/10W         1           R5615,16         ERJ6GEYJ223         M 22KOHM, 1/10W         1           R5617,18         ERJ6GEYJ221         M 220 OHM, J, 1/10W         2           R5621         ERJ6GEYJ221         M 220 OHM, J, 1/10W         1           R5623,24         ERJ6GEYJ471         M 47KOHM, J, 1/10W         1           R5630         ERJ6GEYJ471         M 47KOHM, J, 1/10W         1           R5632         ERJ6GEYJ471         M 470 OHM, J, 1/10W         1           R5633         ERJ6GEYJ471         M 470 OHM, J, 1/10W         1           R5634	
R5603         ERJ6ENF2550         M 255 OHM, 1/10W         1           R5605         ERJ6GEYJ223         M 22KOHM,J,1/10W         1           R5606         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5607         ERJ6ENF1871         M 1.87KOHM, 1/10W         1           R5609         ERJ6ENF1871         M 1.87KOHM, 1/10W         1           R5610         ERJ6EYJ103         M 10KOHM,J,1/10W         1           R5611         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5612         ERJ6ENF1652         M16.5KOHM, 1/10W         1           R5615,16         ERJ6GEYJ223         M 22KOHM,J,1/10W         2           R5617,18         ERJ6GEYJ221         M 220 OHM,J,1/10W         2           R5621         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5622,24         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         2           R5632,24         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         3           R5630         ERJ6GEYJ471         M 4.7KOHM,J,1/10W         1           R5633         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5634         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5635         <	
R5605         ERJ6GEYJ223         M 22KOHM,J,1/10W         1           R5606         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5607         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5609         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5610         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5611         ERJ6ENF8202         M 82KOHM, 1/10W         1           R5612         ERJ6ENF1652         M16.5KOHM, 1/10W         1           R5615,16         ERJ6GEYJ223         M 22KOHM, J,1/10W         2           R5617,18         ERJ6GEYJ221         M 22O OHM,J,1/10W         2           R5621         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5623,24         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5625-27         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         3           R5630         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R5632         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5633         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5634         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5635 <t< td=""><td></td></t<>	
R5606         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5607         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5609         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5610         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5611         ERJ6ENF8202         M 82KOHM, 1/10W         1           R5612         ERJ6ENF1652         M16.5KOHM, 1/10W         1           R5615,16         ERJ6GEYJ223         M 22KOHM,J,1/10W         2           R5617,18         ERJ6GEYJ221         M 220 OHM,J,1/10W         2           R5621         ERJ6GEYJ2103         M 10KOHM,J,1/10W         1           R5623,24         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5623,24         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         3           R5630         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R5632         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5633         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5634         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5635         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5639         <	
R5607         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5609         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5610         ERJ6GEYJ103         M 10KOHM, J,1/10W         1           R5611         ERJ6ENF8202         M 82KOHM, 1/10W         1           R5612         ERJ6ENF1652         M16.5KOHM, 1/10W         1           R5615,16         ERJ6GEYJ223         M 22KOHM, J,1/10W         2           R5617,18         ERJ6GEYJ221         M 220 OHM, J,1/10W         2           R5621         ERJ6GEYJ103         M 10KOHM, J,1/10W         1           R5622,24         ERJ6GEYOR00         M 0 OHM, 1/10W         2           R5623,24         ERJ6GEYJ472         M 4.7KOHM, J,1/10W         3           R5630         ERJ6GEYJ472         M 4.7KOHM, J,1/10W         1           R5632         ERJ6GEYJ471         M 470 OHM, J,1/10W         1           R5633         ERJ6GEYJ471         M 470 OHM, J,1/10W         1           R5634         ERJ6GEYJ471         M 470 OHM, J,1/10W         1           R5635         ERJ6GEYJ471         M 470 OHM, J,1/10W         1           R5639         ERJ6GEYJ222         M 2.2KOHM, J,1/10W         1           R5640	
R5609         ERJ6ENF1871         M1.87KOHM, 1/10W         1           R5610         ERJ6GEYJ103         M 10KOHM, J,1/10W         1           R5611         ERJ6ENF8202         M 82KOHM, 1/10W         1           R5612         ERJ6ENF1652         M16.5KOHM, 1/10W         1           R5615,16         ERJ6GEYJ223         M 22KOHM, J,1/10W         2           R5617,18         ERJ6GEYJ221         M 220 OHM, J,1/10W         2           R5621         ERJ6GEYJ103         M 10KOHM, J,1/10W         1           R5623,24         ERJ6GEYOR00         M 0 OHM, 1/10W         2           R5625-27         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         3           R5630         ERJ6GEYJ471         M 470 OHM, J,1/10W         1           R5633         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5634         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5635         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5636         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5637,38         ERJ6GEYJ221         M 22 OHM,J,1/10W         1           R5640         ERJ6GEYJ222         M 2.2KOHM,J,1/10W         1           R5641	
R5610         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R5611         ERJ6ENF8202         M 82KOHM, 1/10W         1           R5612         ERJ6ENF1652         M16.5KOHM, 1/10W         1           R5615,16         ERJ6GEYJ223         M 22KOHM, J, 1/10W         2           R5617,18         ERJ6GEYJ221         M 220 OHM, J, 1/10W         2           R5621         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R5623,24         ERJ6GEY0R00         M 0 OHM, 1/10W         2           R5630,2         ERJ6GEYJ472         M 4.7KOHM, J, 1/10W         3           R5630         ERJ6GEYJ471         M 470 OHM, J, 1/10W         1           R5632         ERJ6GEYJ471         M 470 OHM, J, 1/10W         1           R5633         ERJ6GEYJ471         M 470 OHM, J, 1/10W         1           R5634         ERJ6GEYJ471         M 470 OHM, J, 1/10W         1           R5635         ERJ6GEYJ471         M 470 OHM, J, 1/10W         1           R5636         ERJ6GEYJ471         M 470 OHM, J, 1/10W         1           R5637,38         ERJ6GEYJ471         M 470 OHM, J, 1/10W         1           R5640         ERJ6GEYJ472         M 4.7KOHM, J, 1/10W         1	
R5611         ERJ6ENF8202         M 82KOHM, 1/10W         1           R5612         ERJ6ENF1652         M16.5KOHM, 1/10W         1           R5615,16         ERJ6GEYJ223         M 22KOHM,J,1/10W         2           R5617,18         ERJ6GEYJ221         M 220 OHM,J,1/10W         2           R5621         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5623,24         ERJ6GEY0R00         M 0 OHM, 1/10W         2           R5630.         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         3           R5630         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5632         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5633         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5634         ERJ6GEYJ221         M 220 OHM,J,1/10W         1           R5635         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5636         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5637,38         ERJ6GEYJ472         M 220 OHM,J,1/10W         1           R5640         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R5641         ERJ6GEYJ222         M 2.2KOHM,J,1/10W         1           R5642	
R5612         ERJ6ENF1652         M16.5KOHM, 1/10W         1           R5615,16         ERJ6GEYJ223         M 22KOHM,J,1/10W         2           R5617,18         ERJ6GEYJ221         M 220 OHM,J,1/10W         2           R5621         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5623,24         ERJ6GEY0R00         M 0 OHM, 1/10W         2           R5625-27         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         3           R5630         ERJ6GEYJ471         M 470 OHM, J,1/10W         1           R5632         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5633         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5634         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5635         ERJ6GEYJ221         M 220 OHM,J,1/10W         1           R5636         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5637,38         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5640         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R5641         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R5642         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5644	
R5615,16         ERJ6GEYJ223         M 22KOHM,J,1/10W         2           R5617,18         ERJ6GEYJ221         M 220 OHM,J,1/10W         2           R5621         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5623,24         ERJ6GEYOR00         M 0 OHM, 1/10W         2           R5625-27         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         3           R5630         ERJ6GEYOR00         M 0 OHM, 1/10W         1           R5632         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5633         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5634         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5635         ERJ6GEYJ221         M 220 OHM,J,1/10W         1           R5636         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5637,38         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R5640         ERJ6GEYJ472         M 2.2KOHM,J,1/10W         1           R5641         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R5642         ERJ6GEYJ471         M 470 OHM,J,1/10W         1           R5643         ERJ6GEYJ222         M 2.2KOHM,J,1/10W         1           R5644	
R5617,18       ERJ6GEYJ221       M 220 OHM,J,1/10W       2         R5621       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R5623,24       ERJ6GEY0R00       M 0 OHM, 1/10W       2         R5625-27       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       3         R5630       ERJ6GEY0R00       M 0 OHM, 1/10W       1         R5632       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5633       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5634       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5635       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5636       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5637,38       ERJ6GEYJ473       M 10KOHM,J,1/10W       1         R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5644       ERJ6GEYJ221       M 2.2KOHM,J,1/10W       1         R5645,46 <t< td=""><td></td></t<>	
R5621 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5623,24 ERJ6GEY0R00 M 0 OHM, 1/10W 2 R5625-27 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 3 R5630 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5632 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5633 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5637,38 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5640 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5641 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5642 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5643 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5647 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5648 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5649 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1	
R5623,24       ERJ6GEY0R00       M 0 OHM, 1/10W       2         R5625-27       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       3         R5630       ERJ6GEY0R00       M 0 OHM, 1/10W       1         R5632       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5633       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R5634       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5635       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5636       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5637,38       ERJ6GEYJ103       M 10KOHM,J,1/10W       2         R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6GEYJ221       M 2.2KOHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ER	
R5625-27       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       3         R5630       ERJ6GEY0R00       M 0 OHM, 1/10W       1         R5632       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5633       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5634       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5635       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5636       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5637,38       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ2681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6GEYJ221       M 2.2KOHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ221       M 20 OHM,J,1/10W       1         R5650	
R5630       ERJ6GEY0R00       M 0 OHM, 1/10W       1         R5632       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5633       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R5634       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5635       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5636       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5637,38       ERJ6GEYJ103       M 10KOHM,J,1/10W       2         R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6GEYJ221       M 2.2KOHM, 1/10W       1         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5650       ERJ6GE	
R5632       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5633       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R5634       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5635       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5636       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5637,38       ERJ6GEYJ103       M 10KOHM,J,1/10W       2         R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6ENF2201       M 2.2KOHM,J,1/10W       1         R5647       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5650       ERJ6GEYOR00       M 0 OHM, 0 OHM, 1/10W       1	
R5633       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R5634       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5635       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5636       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5637,38       ERJ6GEYJ103       M 10KOHM,J,1/10W       2         R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6GEYJ221       M 2.2KOHM, 1/10W       1         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5650       ERJ6GEYOR00       M 0 OHM, 1/10W       1	
R5633       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R5634       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5635       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5636       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5637,38       ERJ6GEYJ103       M 10KOHM,J,1/10W       2         R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6GEYJ221       M 2.2KOHM, 1/10W       1         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5650       ERJ6GEYOR00       M 0 OHM, 1/10W       1	
R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5637,38 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R5639 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5640 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5641 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5643 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5645,46 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 2 R5647 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5648 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R5649 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1	
R5635       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5636       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5637,38       ERJ6GEYJ103       M 10KOHM,J,1/10W       2         R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6ENF2201       M 2.2KOHM, 1/10W       2         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5636       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5637,38       ERJ6GEYJ103       M 10KOHM,J,1/10W       2         R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6ENF2201       M 2.2KOHM, 1/10W       2         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5637,38       ERJ6GEYJ103       M 10KOHM,J,1/10W       2         R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6ENF2201       M 2.2KOHM, 1/10W       2         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5639       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6ENF2201       M 2.2KOHM, 1/10W       2         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5640       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6ENF2201       M 2.2KOHM, 1/10W       2         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5641       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6ENF2201       M 2.2KOHM, 1/10W       2         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5642       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6ENF2201       M 2.2KOHM, 1/10W       2         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5643       ERJ6GEYJ681       M 680 OHM,J,1/10W       1         R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6ENF2201       M 2.2KOHM, 1/10W       2         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5644       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5645,46       ERJ6ENF2201       M 2.2KOHM, 1/10W       2         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5645,46       ERJ6ENF2201       M 2.2KOHM, 1/10W       2         R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5647       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5648       ERJ6GEYJ392       M 3.9KOHM,J,1/10W       1         R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5649       ERJ6GEYJ104       M 100KOHM,J,1/10W       1         R5650       ERJ6GEYJ221       M 220 OHM,J,1/10W       1         R5652       ERJ6GEY0R00       M 0 OHM, 1/10W       1	
R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5652 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R5652 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R5653-56   ERJ6GEYJ103   M 10KOHM.J.1/10W   4	
R5657,58 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 2	
R5660   ERJ6GEY0R00   M 0 OHM, 1/10W   1	
R5662 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R5670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	
R5672 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	
R5675 ERJ6GEYJ471 M 470 OHM,J,1/10W 1	
R5680 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R5692 ERJ6GEYJ102 M 1KOHM,J,1/10W 1	
R5693 ERJ6GEYJ333 M 33KOHM,J,1/10W 1	
R5694,95 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	
R5696 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1	
R5815 ERJ6ENF3900 M 390 OHM, 1/10W 1	
· · ·	
R6001	
R6002-05   ERJ6GEYJ151   M 150 OHM,J,1/10W   4	
R6006,07	
R6008,09	
R6011-16 ERJ14YJ150U M 15 OHM, J,1/4W 6	
R6019-22 ERJ14YJ150U M 15 OHM, J,1/4W 4	
R6023 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	

1 .	1			
	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6025	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6026	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6027,28	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R6029-31	ERJ6GEYJ103	M 10KOHM,J,1/10W	3	
R6033	ERJ14YJ204	M 200KOHM, J,1/4W	1	
R6034,35	ERJ14YJ150U	M 15 OHM, J,1/4W	2	
R6041,42	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2	
R6049,50	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2	
R6055	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6056	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6057	ERG1FJS470D	M 47 OHM, J, 1W	1	
R6059,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R6061	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R6062,63	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6067	ERG1FJS472D	M 4.7KOHM, J, 1W	1	
R6068	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6069	ERJ6ENF4992	M49.9KOHM, 1/10W	1	
R6070	ERJ6ENF4872	M48.7KOHM, 1/10W	1	
R6073	ERJ6ENF2551	M2.55KOHM, 1/10W	1	
R6074	ERJ6ENF4642	M46.4KOHM, 1/10W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
	ERX3FJSR22D	M 2.2 OHM, J, 3W	2	
	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
	ERJ14YJ224	M 220KOHM, J,1/4W	1	
	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
-	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
	ERJ14YJ181U	M 181 OHM, J,1/4W	1	42 INCH
	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	42 INCH
	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	12 (3.1
	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
	EXB38V470J	RESISTOR ARRAY	1	
	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	EXB38V472J	RESISTOR ARRAY	1	
	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	ERJ6ENF3902	M 39KOHM, 1/10W	2	
	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
-	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
	ERJ6GEY0R00	M 0 OHM, 1/10W	<del>                                     </del>	
	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
		M 56KOHM,J,1/10W	1	
	ERJ6GEYJ563		-	
	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
	ERJ14YJ103	M 10KOHM, J,1/4W	2	
	ERJ6ENF1183	M 118KOHM, 1/10W	1	
	ERJ6ENF2551	M2.55KOHM, 1/10W	2	
	ERJ14YJ104	M 100KOHM, J,1/4W	1	
R6460	ERJ14YJ203U	M 20KOHM, 1/2W	1	ļ

R6461 ERG1FJS471D M 470 OHM, J, 1W R6463 ERJ6GEYJ102 M 1KOHM,J,1/10W	1
	1
R6464   ERJ6GEYJ222   M 2.2KOHM,J,1/10W	1
R6465 ERX3FJS8R2D M 8.2 OHM, J, 3W	1
R6466 ERJ6GEYJ102 M 1KOHM,J,1/10W	1
R6467 ERJ6GEYJ122 M 1.2KOHM,J,1/10W	1
R6468 ERJ6GEYJ472 M 4.7KOHM,J,1/10W	1
R6469 ERJ6ENF1602 M 16KOHM, 1/10W	1
R6471 ERJ6ENF4701 M 4.7KOHM, 1/10W	1
R6472 ERJ6GEYJ102 M 1KOHM,J,1/10W	1
R6473 ERJ6GEYJ822 M 8.2KOHM,J,1/10W	1
R6474 ERG1FJS121D M 120 OHM, J, 1W	1
R6475 ERJ6GEYJ332 M 3.3KOHM,J,1/10W	1
R6476 ERJ6ENF2743 M 274KOHM, 1/10W	1
R6478 ERJ6ENF6981 M6.98KOHM, 1/10W	1
R6479 ERJ6GEYJ104 M 100KOHM,J,1/10W	1
R6480 ERJ6GEYJ103 M 10KOHM,J,1/10W	11
R6481 ERJ6ENF1001 M 1KOHM, 1/10W	11
R6482 ERJ6GEYJ472 M 4.7KOHM,J,1/10W	11
R6483 ERJ14YJ752 M 75KOHM, J,1/4W	11
R6484 ERJ6GEYJ472 M 4.7KOHM, J,1/10W	11
	2
R6485,86   ERJ6GEYJ103   M 10KOHM,J,1/10W	
R6487 ERJ6GEYJ472 M 4.7KOHM,J,1/10W	1
R6488   ERJ6GEYJ103   M 10KOHM,J,1/10W	1
R6489	1
R6491 ERJ14YJ104 M 100KOHM, J,1/4W	1
R6492 ERJ6ENF2003 M 200KOHM, 1/10W	1
R6493 ERJ6ENF2703 M 270KOHM, 1/10W	1
R6495,96 ERJ6GEYJ154 M 150KOHM,J,1/10W	2
R6497 ERJ6GEYJ103 M 10KOHM,J,1/10W	1
R6498,99 ERX1FJS8R2D M 8.2 OHM, J, 1W	2
R6500 ERJ6GEYJ122 M 1.2KOHM,J,1/10W	1
R6501-09 ERJ6GEYJ222 M 2.2KOHM,J,1/10W	9
R6510 ERX3FJS2R2D M 2.2 OHM, J, 3W	1
R6511 ERJ6GEYJ100 M 10 OHM,J,1/10W	1
R6512 ERJ6GEYJ471 M 470 OHM,J,1/10W	1
R6513   ERX3FJS2R2D   M 2.2 OHM, J, 3W	1
R6514   ERJ6GEYJ104   M 100KOHM,J,1/10W	1
R6515   ERJ6GEYJ100   M 10 OHM,J,1/10W	1
R6516 ERJ6GEYJ471 M 470 OHM,J,1/10W	1
R6517 ERJ6GEYJ103 M 10KOHM,J,1/10W	1
R6518 TAJAAH0101JV M 100 OHM,J,1/16W	1
R6519 ERJ6GEYJ102 M 1KOHM,J,1/10W	1
R6520 ERJ6GEYJ151 M 150 OHM,J,1/10W	1
R6521 ERJ6GEYJ104 M 100KOHM,J,1/10W	1
R6524 ERJ6ENF3001 M 3KOHM, 1/10W	1
R6525 ERJ6GEYJ104 M 100KOHM,J,1/10W	1
R6526 ERJ6GEYJ470 M 47 OHM,J,1/10W	11
R6527 ERJ14YJ102 M 1KOHM, J,1/4W	1
R6528 ERJ6GEYJ102 M 1KOHM,J,1/10W	11
R6529-36 ERJ6GEYJ470 M 47 OHM,J,1/10W	8
R6538 ERJ6GEYJ102 M 1KOHM,J,1/10W	1
R6539 TAJAAH0101JV M 100 OHM,J,1/16W	11
R6540 ERJ6GEYJ104 M 100KOHM,J,1/10W	11
R6541 ERJ6GEYJ470 M 47 OHM,J,1/10W R6542 ERJ6GEYJ100 M 10 OHM,J,1/10W	1
R6544-46 ERJ6GEYJ100 M 10 OHM, J, 1/10W	3
R6548 ERJ6GEYJ100 M 10 OHM,J,1/10W	1
R6550 ERJ6GEYJ223 M 22KOHM,J,1/10W	1

Ĩ	1		
R6551	ERJ6GEYJ101	M 100 OHM,J,1/10W	1
R6552,53	ERJ6ENF1003	M 100KOHM, 1/10W	2
R6554	ERG1FJS101D	M 100 OHM, J, 1W	1
R6555	ERJ6GEYJ104	M 100KOHM,J,1/10W	1
R6556	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1
R6558	ERJ6GEYJ103	M 10KOHM,J,1/10W	1
R6559	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1
R6560,61	ERJ6GEYJ470	M 47 OHM,J,1/10W	2
R6562	ERJ6GEYJ102	M 1KOHM,J,1/10W	1
R6563	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	1
R6565	ERJ6GEYJ103	M 10KOHM,J,1/10W	1
R6566	TAJAAH0101JV	M 100 OHM,J,1/16W	1
R6567,68	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2
R6570	ERJ6GEYJ103	M 10KOHM,J,1/10W	1
R6571-78	ERJ6GEYJ471	M 470 OHM,J,1/10W	8
R6580	ERJ6GEYJ103	M 10KOHM,J,1/10W	1
R6581	TAJAAH0101JV	M 100 OHM,J,1/16W	1
R6582,83	ERJ6ENF3902	M 39KOHM, 1/10W	2
R6584	ERJ6ENF7501	M 7.5KOHM, 1/10W	1
R6585	ERJ6GEYJ102	M 1KOHM,J,1/10W	11
R6586	ERJ6GEYJ103	M 10KOHM,J,1/10W	11
R6587	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	11
			2
R6588,89	ERJ6GEYJ103	M 10KOHM, J, 1/10W	
R6590	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1
R6591	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1
R6592,93	ERJ6GEYJ105	M 1MOHM,J,1/10W	2
R6594	ERJ14YJ104	M 100KOHM, J,1/4W	1
R6595	ERJ6ENF1432	M14.3KOHM, 1/10W	1
R6596	ERJ6ENF5231	M5.23KOHM, 1/10W	1
R6598	ERJ6GEYJ103	M 10KOHM,J,1/10W	1
R6599,00	ERJ6GEYJ101	M 100 OHM,J,1/10W	2
R6604	ERJ6GEYJ101	M 100 OHM,J,1/10W	1
R6605-07	ERJ6GEYJ224	M 220KOHM,J,1/10W	3
R6608,09	ERJ12YJ1R0	M 1 OHM, J,1/2W	2
R6610	ERJ6GEYJ104	M 100KOHM,J,1/10W	1
R6611-14	ERJ14YJ150U	M 15 OHM, J,1/4W	4
R6615	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1
R6616	ERDS1FJ221	C 220 OHM, J,1/2W	1
R6617,18	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2
R6619,20	ERJ14YJ150U	M 15 OHM, J,1/4W	2
R6621	ERJ6ENF1543	M 154KOHM, 1/10W	1
R6622,23	ERJ6GEYJ103	M 10KOHM,J,1/10W	2
R6624	ERJ6GEYJ100	M 10 OHM,J,1/10W	1
R6625	ERJ6GEYJ103	M 10KOHM,J,1/10W	1
R6626	ERJ6GEYJ100	M 10 OHM,J,1/10W	1
R6627,28	TAJAAH0101JV	M 100 OHM,J,1/16W	2
R6629	ERJ6ENF2202	M 2.2KOHM, 1/10W	1
R6630	ERJ14YJ204	M 200KOHM, J,1/4W	1
R6635-38	ERJ14YJ150U	M 15 OHM, J,1/4W	4
R6641,42	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2
R6643,44	ERJ14YJ150U	M 15 OHM, J,1/4W	2
	ERJ6GEYJ151	M 150 OHM, J, 1/40V	2
R6645,46	l		
R6647,48	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2
R6649	EXB38V680J	RESISTOR ARRAY	1
R6653	EXB38V680J	RESISTOR ARRAY	1
R6655	ERJ6GEYJ101	M 100 OHM,J,1/10W	1
R6656	ERJ6GEYJ104	M 100KOHM,J,1/10W	1
R6659,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2
R6661,62	ERJ6GEYJ151	M 150 OHM,J,1/10W	2
-	†	<u> </u>	· •

R6663         EXB38V472J         RESISTOR ARRAY         1           R6664         EXB38V470J         RESISTOR ARRAY         1           R6667,68         ERJGGEYJ151         M 150 OHM, J, 1/10W         2           R6669         EXB38V472J         RESISTOR ARRAY         1           R6670         EXB38V470J         RESISTOR ARRAY         1           R6676         EXB38V470J         RESISTOR ARRAY         1           R6683         EXB38V470J         RESISTOR ARRAY         1           R6686         EXB38V470J         RESISTOR ARRAY         1           R6696         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6699         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6901         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJ6GEYJ221         M 220KOHM,J,1/10W         1           R6912         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ103         M 1	
R6667,68         ERJ6GEYJ151         M 150 OHM,J,1/10W         2           R6669         EXB38V472J         RESISTOR ARRAY         1           R6670         EXB38V470J         RESISTOR ARRAY         1           R6675         EXB38V470J         RESISTOR ARRAY         1           R6676         EXB38V470J         RESISTOR ARRAY         1           R6683         EXB38V470J         RESISTOR ARRAY         1           R6686         EXB38V472J         RESISTOR ARRAY         1           R6696         ERJGGEYJ103         M 10KOHM,J,1/10W         1           R6699         ERJGGEYJ103         M 10KOHM,J,1/10W         1           R6901         ERJGGEYJ101         M 100 OHM,J,1/10W         1           R6902-04         ERJGGEYJ221         M 220 OHM,J,1/10W         2           R6910,11         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R6912         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6955         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6959         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6975-78         ERJ6GEYJ103 </td <td></td>	
R6669         EXB38V472J         RESISTOR ARRAY         1           R6670         EXB38V470J         RESISTOR ARRAY         1           R6675         EXB38V472J         RESISTOR ARRAY         1           R6676         EXB38V470J         RESISTOR ARRAY         1           R6683         EXB38V470J         RESISTOR ARRAY         1           R6686         EXB38V472J         RESISTOR ARRAY         1           R6696         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6699         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6901         ERJ6GEYJ101         M 100 OHM,J,1/10W         1           R6902-04         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJ6GEYJ210         M 10KOHM,J,1/10W         2           R6912         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955-8         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6975-78         ERJ6GEYJ24         M 220KOHM,J,1/10W         1           R7102         ERJ14YJ220 <td></td>	
R6670         EXB38V470J         RESISTOR ARRAY         1           R6675         EXB38V472J         RESISTOR ARRAY         1           R6676         EXB38V470J         RESISTOR ARRAY         1           R6683         EXB38V470J         RESISTOR ARRAY         1           R6686         EXB38V472J         RESISTOR ARRAY         1           R6696         ERJGGEYJ103         M 10KOHM,J,1/10W         1           R6699         ERJGGEYJ101         M 10KOHM,J,1/10W         1           R6901         ERJGGEYJ221         M 220 OHM,J,1/10W         1           R6902-04         ERJGGEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJGGEYJ221         M 220 OHM,J,1/10W         1           R6912         ERJGGEYJ472         M 4.7KOHM,J,1/10W         1           R6913         ERJGGEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJGGEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJGGEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJGGEYJ221         M 220 OHM,J,1/10W         1           R6959         ERJGGEYJ103         M 10KOHM,J,1/10W         1           R7102         ERJ14YJ220 <td></td>	
R6675         EXB38V472J         RESISTOR ARRAY         1           R6676         EXB38V470J         RESISTOR ARRAY         1           R6683         EXB38V470J         RESISTOR ARRAY         1           R6686         EXB38V472J         RESISTOR ARRAY         1           R6696         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6699         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6901         ERJ6GEYJ221         M 220 OHM,J,1/10W         1           R6902-04         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJ6GEYJ221         M 220 OHM,J,1/10W         2           R6912         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6913         ERJ6GEYJ224         M 220KOHM,J,1/10W         4           R6920-23         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6956-58         ERJ6GEYJ221         M 220KOHM,J,1/10W         3           R6975-78         ERJ6GEYJ103         M 10KOHM,J,1/10W         4           R7102         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7103         ERJ14Y	
R6676         EXB38V470J         RESISTOR ARRAY         1           R6683         EXB38V470J         RESISTOR ARRAY         1           R6686         EXB38V472J         RESISTOR ARRAY         1           R6696         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6699         ERJ6GEYJ101         M 10KOHM,J,1/10W         1           R6901         ERJ6GEYJ221         M 220 OHM,J,1/10W         1           R6902-04         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJ6GEYJ104         M 100KOHM,J,1/10W         1           R6912         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R6913         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6924         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6975-78         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6975-78         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R7102         ERJ14YJ220         M 22 OHM, J,1/4W         1         37 INCH           R7	
R6683         EXB38V470J         RESISTOR ARRAY         1           R6686         EXB38V472J         RESISTOR ARRAY         1           R6696         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6699         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6901         ERJ6GEYJ101         M 100 OHM,J,1/10W         1           R6902-04         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJ6GEYJ104         M 100KOHM,J,1/10W         2           R6912         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R6913         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ103         M 10KOHM,J,1/10W         4           R6924         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6956-58         ERJ6GEYJ221         M 220 OHM,J,1/10W         1           R6975-78         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R7102         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7104         ERJ6GEYJ103         M 10KOHM,J,1/10W         1         37 INCH <t< td=""><td></td></t<>	
R6686         EXB38V472J         RESISTOR ARRAY         1           R6696         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6699         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6901         ERJ6GEYJ101         M 100 OHM,J,1/10W         1           R6902-04         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJ6GEYJ104         M 100KOHM,J,1/10W         2           R6912         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R6913         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ103         M 10KOHM,J,1/10W         4           R6924         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJ6GEYJ221         M 220 OHM,J,1/10W         1           R6956-58         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6975-78         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R7102         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7103         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7104         ERJ6GEYJ103         M 10KOHM,J,1/10W         1         37 INCH	
R6696         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6699         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6901         ERJ6GEYJ101         M 100 OHM,J,1/10W         1           R6902-04         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJ6GEYJ104         M 100KOHM,J,1/10W         2           R6912         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R6913         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ103         M 10KOHM,J,1/10W         4           R6924         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJ6GEYJ101         M 100 OHM,J,1/10W         1           R6956-58         ERJ6GEYJ221         M 220KOHM,J,1/10W         3           R6959         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6975-78         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R7102         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7103         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7105         TAJAAH0470JV         M 47 OHM,J,1/10W         1         37 INCH	
R6699         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R6901         ERJ6GEYJ101         M 100 OHM,J,1/10W         1           R6902-04         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJ6GEYJ104         M 100KOHM,J,1/10W         2           R6912         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R6913         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ103         M 10KOHM,J,1/10W         4           R6924         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJ6GEYJ221         M 220 OHM,J,1/10W         1           R6956-58         ERJ6GEYJ221         M 220KOHM,J,1/10W         1           R6975-78         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6979         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R7102         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7104         ERJ6GEYJ103         M 10KOHM,J,1/10W         1         37 INCH           R7105         TAJAAH0470JV         M 47 OHM,J,1/16W         1         37 INCH           R7106,07         ERJ14YJ220         M 22 OHM, J,1/14W <td< td=""><td></td></td<>	
R6901         ERJ6GEYJ101         M 100 OHM,J,1/10W         1           R6902-04         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJ6GEYJ104         M 100KOHM,J,1/10W         2           R6912         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R6913         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ103         M 10KOHM,J,1/10W         4           R6924         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJ6GEYJ210         M 100 OHM,J,1/10W         1           R6956-58         ERJ6GEYJ221         M 220KOHM,J,1/10W         3           R6959         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6975-78         ERJ6GEYJ103         M 10KOHM,J,1/10W         4           R6979         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R7102         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7103         ERJ14YJ220         M 22 OHM, J,1/4W         1         37 INCH           R7105         TAJAAH0470JV         M 47 OHM,J,1/10W         1         42 INCH           R7106,07         ERJ14YJ220         M 22 OHM, J,1/4W         2	
R6902-04         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6910,11         ERJ6GEYJ104         M 100KOHM,J,1/10W         2           R6912         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R6913         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ103         M 10KOHM,J,1/10W         4           R6924         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJ6GEYJ101         M 100 OHM,J,1/10W         1           R6956-58         ERJ6GEYJ221         M 220 KOHM,J,1/10W         1           R6959         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6975-78         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R7102         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7103         ERJ14YJ220         M 22 OHM, J,1/4W         1         37 INCH           R7104         ERJ6GEYJ103         M 10KOHM,J,1/10W         1         37 INCH           R7105         TAJAAH0470JV         M 47 OHM,J,1/10W         1         42 INCH           R7106         TAJAAH0470JV         M 47 OHM,J,1/10W         1         42 INCH           R7108         TAJAAH0470JV <td></td>	
R6910,11         ERJ6GEYJ104         M 100KOHM,J,1/10W         2           R6912         ERJ6GEYJ472         M 4.7KOHM,J,1/10W         1           R6913         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6920-23         ERJ6GEYJ103         M 10KOHM,J,1/10W         4           R6924         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6955         ERJ6GEYJ101         M 100 OHM,J,1/10W         1           R6956-58         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6959         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6975-78         ERJ6GEYJ103         M 10KOHM,J,1/10W         1           R7102         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7103         ERJ14YJ220         M 22 OHM, J,1/4W         1         37 INCH           R7104         ERJ6GEYJ103         M 10KOHM,J,1/10W         1         37 INCH           R7105         TAJAAH0470JV         M 47 OHM,J,1/10W         1         42 INCH           R7108         TAJAAH0470JV         M 47 OHM,J,1/16W         1         42 INCH           R7109         ERJ6GEY0R00         M 0 OHM, 1/10W         1         42 INCH	
R6912       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       1         R6913       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6920-23       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6924       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6955       ERJ6GEYJ101       M 100 OHM,J,1/10W       1         R6956-58       ERJ6GEYJ221       M 220 OHM,J,1/10W       3         R6959       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6975-78       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6979       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7102       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1       37 INCH         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1       37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/10W       1       42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/10W       1       42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1       42 INCH	
R6913       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6920-23       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6924       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6955       ERJ6GEYJ101       M 100 OHM,J,1/10W       1         R6956-58       ERJ6GEYJ221       M 220 OHM,J,1/10W       3         R6959       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6975-78       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6979       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7102       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1       37 INCH         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1       37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/10W       1       42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1       42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1       42 INCH	
R6920-23       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6924       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6955       ERJ6GEYJ101       M 100 OHM,J,1/10W       1         R6956-58       ERJ6GEYJ221       M 220 OHM,J,1/10W       3         R6959       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6975-78       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6979       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7102       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1       37 INCH         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1       37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/10W       1       42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1       42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1       42 INCH	
R6924       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6955       ERJ6GEYJ101       M 100 OHM,J,1/10W       1         R6956-58       ERJ6GEYJ221       M 220 OHM,J,1/10W       3         R6959       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6975-78       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6979       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7102       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1       37 INCH         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1       37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/10W       1       42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1       42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1       42 INCH	
R6955         ERJ6GEYJ101         M 100 OHM,J,1/10W         1           R6956-58         ERJ6GEYJ221         M 220 OHM,J,1/10W         3           R6959         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R6975-78         ERJ6GEYJ103         M 10KOHM,J,1/10W         4           R6979         ERJ6GEYJ224         M 220KOHM,J,1/10W         1           R7102         ERJ14YJ220         M 22 OHM, J,1/4W         1           R7103         ERJ14YJ220         M 22 OHM, J,1/4W         1         37 INCH           R7104         ERJ6GEYJ103         M 10KOHM,J,1/10W         1         37 INCH           R7105         TAJAAH0470JV         M 47 OHM,J,1/10W         1         42 INCH           R7106,07         ERJ14YJ220         M 22 OHM, J,1/4W         2           R7108         TAJAAH0470JV         M 47 OHM,J,1/16W         1         42 INCH           R7109         ERJ6GEY0R00         M 0 OHM, 1/10W         1         42 INCH	
R6956-58       ERJ6GEYJ221       M 220 OHM,J,1/10W       3         R6959       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6975-78       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6979       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7102       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1       37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/10W       1       42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1       42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1       42 INCH	
R6959       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R6975-78       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6979       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7102       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1       37 INCH         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1       37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/10W       1       42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1       42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1       42 INCH	
R6975-78       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6979       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7102       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1 37 INCH         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/10W       1 37 INCH         R7105       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH	
R6975-78       ERJ6GEYJ103       M 10KOHM,J,1/10W       4         R6979       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7102       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1 37 INCH         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/10W       1 37 INCH         R7105       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH	
R6979       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7102       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1 37 INCH         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/16W       1 37 INCH         R7105       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH	
R7102       ERJ14YJ220       M 22 OHM, J,1/4W       1         R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1 37 INCH         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/16W       1 37 INCH         R7105       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH	
R7103       ERJ14YJ220       M 22 OHM, J,1/4W       1 37 INCH         R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/16W       1 37 INCH         R7105       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH	
R7104       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 37 INCH         R7105       TAJAAH0470JV       M 47 OHM,J,1/16W       1 37 INCH         R7105       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH	
R7105       TAJAAH0470JV       M 47 OHM,J,1/16W       1 37 INCH         R7105       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH	
R7105       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH	
R7106,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7108       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH         R7109       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH	
R7108 TAJAAH0470JV M 47 OHM,J,1/16W 1 42 INCH R7109 ERJ6GEY0R00 M 0 OHM, 1/10W 1 42 INCH	
R7109 ERJ6GEY0R00 M 0 OHM, 1/10W 1 42 INCH	
· · · · · · · · · · · · · · · · · · ·	
R7110,11   ERJ14YJ220   M 22 OHM, J,1/4W   2	
R7117 ERJ6GEYJ224 M 220KOHM,J,1/10W 1	
R7119,20 ERJ3GEY0R00 M 0 OHM, 1/16W 2 42 INCH	
R7121 ERJ14YJ220 M 22 OHM, J,1/4W 1 42 INCH	
R7121-23 ERJ8GEY0R00 M 0 OHM, 1/8W 3 37 INCH	
R7125 ERJ6GEYJ102 M 1KOHM,J,1/10W 1	
R7126-28 TAJAAH0470JV M 47 OHM,J,1/16W 3	
R7130 ERJ3GEY0R00 M 0 OHM, 1/16W 1	
R7132-35 ERJ3GEY0R00 M 0 OHM, 1/16W 4	
R7136-41 ERJ14YJ220 M 22 OHM, J,1/4W 6	
R7142,43 EXB38V470J RESISTOR ARRAY 2	
R7144-46 EXB38V470J RESISTOR ARRAY 3 37 INCH	
R7148 EXB38V470J RESISTOR ARRAY 1 42 INCH	
R7154 EXB38V470J RESISTOR ARRAY 1 42 INCH	
R7161 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7162,63 TAJAAH0470JV M 47 OHM,J,1/16W 2	
R7166,67 TAJAAH0470JV M 47 OHM,J,1/16W 2	
R7175-77 ERJ6GEY0R00 M 0 OHM, 1/10W 3 R7187 ERJ6GEYJ223 M 22KOHM,J,1/10W 1	
R7188	
R7192	
R7194	
R7196 EXB38V470J RESISTOR ARRAY 1 42 INCH	
R7196,97   ERJ3GEY0R00   M 0 OHM, 1/16W   2   37 INCH	
R7202,03 ERJ14YJ220 M 22 OHM, J,1/4W 2	
R7204   ERJ3GEYJ560   M 56 OHM,J,1/16W   1   37 INCH	

R7204,05       ERJ8GEY0R00       M 0 OHM, 1/8W       2 42 INCH         R7206,07       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7208,09       ERJ8GEY0R00       M 0 OHM, 1/8W       2 42 INCH         R7210,11       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7212       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7213       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH         R7214,15       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7217       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7218-21       ERJ8GEY0R00       M 0 OHM, 1/8W       4 37 INCH         R7218-21       ERJ3GEY0R00       M 0 OHM, 1/16W       4 42 INCH         R7222       ERJ3GEYJ560       M 56 OHM,J,1/16W       1 42 INCH         R7223       TAJAAH0470JV       M 47 OHM,J,1/10W       1 42 INCH         R7225       ERJ6GEYJ102       M 1KOHM,J,1/10W       1	
R7208,09       ERJ8GEY0R00       M 0 OHM, 1/8W       2 42 INCH         R7210,11       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7212       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7213       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH         R7214,15       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7217       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7218-21       ERJ8GEY0R00       M 0 OHM, 1/8W       4 37 INCH         R7218-21       ERJ3GEY0R00       M 0 OHM, 1/16W       4 42 INCH         R7222       ERJ3GEYJ560       M 56 OHM,J,1/16W       1 42 INCH         R7223       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH	
R7210,11       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7212       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7213       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH         R7214,15       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7217       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7218-21       ERJ8GEY0R00       M 0 OHM, 1/8W       4 37 INCH         R7218-21       ERJ3GEY0R00       M 0 OHM, 1/16W       4 42 INCH         R7222       ERJ3GEYJ560       M 56 OHM,J,1/16W       1 42 INCH         R7223       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH	
R7212       ERJ6GEYJ103       M 10KOHM,J,1/10W       1 42 INCH         R7213       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH         R7214,15       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7217       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7218-21       ERJ8GEY0R00       M 0 OHM, 1/8W       4 37 INCH         R7218-21       ERJ3GEY0R00       M 0 OHM, 1/16W       4 42 INCH         R7222       ERJ3GEYJ560       M 56 OHM,J,1/16W       1 42 INCH         R7223       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH	
R7213       ERJ6GEY0R00       M 0 OHM, 1/10W       1 42 INCH         R7214,15       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7217       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7218-21       ERJ8GEY0R00       M 0 OHM, 1/8W       4 37 INCH         R7218-21       ERJ3GEY0R00       M 0 OHM, 1/16W       4 42 INCH         R7222       ERJ3GEYJ560       M 56 OHM,J,1/16W       1 42 INCH         R7223       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH	
R7214,15       ERJ14YJ220       M 22 OHM, J,1/4W       2         R7217       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7218-21       ERJ8GEY0R00       M 0 OHM, 1/8W       4       37 INCH         R7218-21       ERJ3GEY0R00       M 0 OHM, 1/16W       4       42 INCH         R7222       ERJ3GEYJ560       M 56 OHM,J,1/16W       1       42 INCH         R7223       TAJAAH0470JV       M 47 OHM,J,1/16W       1       42 INCH	
R7217       ERJ6GEYJ224       M 220KOHM,J,1/10W       1         R7218-21       ERJ8GEY0R00       M 0 OHM, 1/8W       4 37 INCH         R7218-21       ERJ3GEY0R00       M 0 OHM, 1/16W       4 42 INCH         R7222       ERJ3GEYJ560       M 56 OHM,J,1/16W       1 42 INCH         R7223       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH	
R7218-21       ERJ8GEY0R00       M 0 OHM, 1/8W       4 37 INCH         R7218-21       ERJ3GEY0R00       M 0 OHM, 1/16W       4 42 INCH         R7222       ERJ3GEYJ560       M 56 OHM,J,1/16W       1 42 INCH         R7223       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH	
R7218-21       ERJ3GEY0R00       M 0 OHM, 1/16W       4 42 INCH         R7222       ERJ3GEYJ560       M 56 OHM,J,1/16W       1 42 INCH         R7223       TAJAAH0470JV       M 47 OHM,J,1/16W       1 42 INCH	
R7222 ERJ3GEYJ560 M 56 OHM,J,1/16W 1 42 INCH R7223 TAJAAH0470JV M 47 OHM,J,1/16W 1 42 INCH	
R7223 TAJAAH0470JV M 47 OHM,J,1/16W 1 42 INCH	
R7225 ERJ6GEYJ102 M 1KOHM,J,1/10W 1	
R7226-29 TAJAAH0470JV M 47 OHM,J,1/16W 4	
R7230 ERJ3GEY0R00 M 0 OHM, 1/16W 1	
R7232 ERJ3GEY0R00 M 0 OHM, 1/16W 1	
R7233-40 ERJ14YJ220 M 22 OHM, J,1/4W 8	
R7241,42 EXB38V470J RESISTOR ARRAY 2	
R7243-45 ERJ6GEY0R00 M 0 OHM, 1/10W 3 42 INCH	
R7243-46 ERJ3GEY0R00 M 0 OHM, 1/16W 4 37 INCH	
R7247 ERJ6GEY0R00 M 0 OHM, 1/10W 1 37 INCH	
R7247 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 42 INCH	
R7248 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 37 INCH	
R7248 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 42 INCH	
R7249,50 EXB38V470J RESISTOR ARRAY 2	
R7251-53 TAJAAH0470JV M 47 OHM,J,1/16W 3 37 INCH	
R7251-53 ERJ6GEY0R00 M 0 OHM, 1/10W 3 42 INCH	
R7254 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 37 INCH	
R7255 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 37 INCH	
R7254,55 TAJAAH0470JV M 47 OHM,J,1/16W 2 42 INCH	
R7257,58 EXB38V470J RESISTOR ARRAY 2	
R7259 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7260-65 ERJ6GEY0R00 M 0 OHM, 1/10W 6 37 INCH	
R7261,62 ERJ3GEY0R00 M 0 OHM, 1/16W 2 42 INCH	
R7283	
R7289,90 TAJAAH0470JV M 47 OHM,J,1/16W 2	
R7293 TAJAAH0470JV M 47 OHM,J,1/16W 1	
R7296 ERJ3GEYJ151 M 150 OHM,J,1/16W 1 42 INCH	
R7296 TAJAAH0470JV M 47 OHM,J,1/16W 1 37 INCH	
R7297 TAJAAH0470JV M 47 OHM,J,1/16W 1	
R7298,99 ERJ3GEY0R00 M 0 OHM, 1/16W 2 37 INCH	
R8003,04 ERJ2GEJ181 M 180 OHM, J,0.063W 2 TH-37/42PE50B	
R8006 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B	
R8008 ERJ2GEJ102 M 1KOHM, J,0.063W 1 TH-37/42PE50B	
R8010-12 ERJ2GEJ103 M 10KOHM, J,0.063W 3 TH-37/42PE50B	
R8014,15 ERJ2GEJ103 M 10KOHM, J,0.063W 2 TH-37/42PE50B	
R8016 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B	
R8020-22 ERJ2GEJ103 M 10KOHM, J,0.063W 3 TH-37/42PE50B	
R8023 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B	
R8024-26 ERJ2GEJ104 M 100KOHM, J,0.063W 3 TH-37/42PE50B	
R8027 D1HG5608A002 NETWORK RESISTER 1 TH-37/42PE50B	
R8036	
R8039,40 ERJ2GEJ472 M 4.7KOHM, J,0.063W 2 TH-37/42PE50B	
R8041 ERJ2GEJ154 M 150KOHM, J,0.063W 1 TH-37/42PE50B	
R8046	
R8047-50   ERJ2GEJ101   M 100 OHM, J,0.063W   4   TH-37/42PE50B	

R8091   EM38W330J   RESISTOR ARRAY   1   TH-3742PE50B   R80952-55   EM2/GELI330   M 10KOCHM, J.0.063W   1   TH-3742PE50B   R80656   ERJ/GELI330   M 33 OHM, J.0.063W   1   TH-3742PE50B   R80656   ERJ/GELI330   RESISTOR ARRAY   1   TH-3742PE50B   R80658   ERJ/GELI330   RESISTOR ARRAY   1   TH-3742PE50B   R80659   ERJ/GELI103   M 10KOHM, J.0.063W   1   TH-3742PE50B   R8073   ERJ/GELI105   M 10KOHM, J.0.063W   1   TH-3742PE50B   R8073   ERJ/GELI105   M 10KOHM, J.0.063W   2   TH-3742PE50B   R8074,75   ERJ/GELI105   M 10KOHM, J.0.063W   2   TH-3742PE50B   R8076   ERJ/GELI103   M 10KOHM, J.0.063W   1   TH-3742PE50B   R8079   ERJ/GELI103   M 10KOHM, J.0.063W   1   TH-3742PE50B   R8079   ERJ/GELI103   M 10KOHM, J.0.063W   1   TH-3742PE50B   R8084,85   DHG1218A002   NETWORK RESISTER   2   TH-3742PE50B   R8101   ERJ/GELF161   M 180 OHM, J.0.063W   3   TH-3742PE50B   R8101   ERJ/GELF161   M 56 OHM, J.0.063W   3   TH-3742PE50B   R8104   ERJ/GELF161   M 56 OHM, J.0.063W   1   TH-3742PE50B   R8105   ERJ/GELF161   M 56 OHM, J.0.063W   2   TH-3742PE50B   R8106   ERJ/GELF161   M 56 OHM, J.0.063W   2   TH-3742PE50B   R8108   ERJ/GELF212   M 22KOHM, J.116W   1   TH-3742PE50B   R8109   ERJ/GELF212   M 22KOHM, J.116W   1   TH-3742PE50B   R81101   ERJ/GECP102   M 24KOHM, J.116W   1   TH-3742PE50B   R81111   ERJ/GECP102   M 24KOHM, J.116W   1   TH-3742PE50B   R81111   ERJ/GECP102   M 24KOHM, J.116W   1   TH-3742PE50B   R8112   ERJ/GECP102   M 24KOHM, J.116W   1   TH-3742PE50B   R8111   ERJ/GECP103   M 0 OHM, J.0.063W   1   TH-3742PE50B   R8112   ERJ/GECP104   M 470 OHM, J.0.063W   1   TH-3742PE50B   R8113   ERJ/GECP104   M 470 OHM, J.0.063W   1   TH-3742PE50B   R8131   ERJ/GECP103   M 56 OHM, J.0.063W   1   TH-3742PE50B   R8132   ERJ/GEGP100   M 56 OHM, J.0.063W   1   TH-3742PE50B   R8133   ERJ/GECP103   M 56 OHM, J.0.063W   1   TH-3742PE50B   R8131   ERJ/GECP103   M 56 OHM, J.0.063W   1   TH-3742PE50B   R8132   ERJ/GELF103   M 56 OHM, J.0.063W   1   TH-3742PE50B   R8133   ERJ/GELF103   M 50 OHM, J.0.063W   1   TH-3742PE50B   R8144	ı	1			
R8056   ER,   ER	R8051	EXB38V330J	RESISTOR ARRAY	-	TH-37/42PE50B
R8056	R8052-55	ERJ2GEJ103		4	TH-37/42PE50B
R8058	R8056	ERJ2GEJ330		1	TH-37/42PE50B
R8073 ER, 26E, 1103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8073 ER, 26E, 1105 M 1MOHM, J, 0.063W 1 TH-37/42PE50B R8074, 75 ER, 26E, 1105 M 1MOHM, J, 0.063W 1 TH-37/42PE50B R8076 ER, 12CE, 1103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8076 ER, 12CE, 1103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8078 ER, 12CE, 1103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8079 ER, 12CE, 1103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8084, 85 D1HG1218A002 NETWORK RESISTER 2 TH-37/42PE50B R8086-8B ER, 12CE, 1560 M 55 OHM, J, 0.063W 1 TH-37/42PE50B R8101 ER, 13GEYF181 M 180 OHM, J, 1063W 1 TH-37/42PE50B R8101 ER, 13GEYF181 M 180 OHM, J, 1063W 1 TH-37/42PE50B R8106, 107 ER, 12CE, 1560 M 55 OHM, J, 0.063W 1 TH-37/42PE50B R8106, 107 ER, 12CE, 1560 M 55 OHM, J, 0.063W 1 TH-37/42PE50B R8106, 107 ER, 12CE, 1560 M 100 OHM, J, 0.063W 1 TH-37/42PE50B R8108 ER, 12CE, 1560 M 100 OHM, J, 0.063W 1 TH-37/42PE50B R8108 ER, 12CE, 1560 M 100 OHM, J, 0.063W 1 TH-37/42PE50B R8110 ER, 12CE, 1560 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R8110 ER, 12CE, 1560 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R81112, 13 ER, 13CEYF072 M 2.7KOHM, 1/16W 1 TH-37/42PE50B R8112, 13 ER, 13CEYF072 M 2.7KOHM, 1/16W 1 TH-37/42PE50B R8112, 13 ER, 13CEYF072 M 2.7KOHM, 1/16W 1 TH-37/42PE50B R8112 ER, 12CE, 1471 M 470 OHM, J, 0.063W 1 TH-37/42PE50B R8112 ER, 12CE, 1471 M 470 OHM, J, 0.063W 1 TH-37/42PE50B R8127 ER, 12CE, 1560 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R8131 ER, 12CE, 1560 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R8131 ER, 12CE, 1560 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R8133 ER, 13CE, 1560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8133 ER, 13CE, 1560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8133 ER, 13CE, 1560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8140, 41 ER, 13CE, 1560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8140, 41 ER, 13CE, 1560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8140, 41 ER, 13CE, 1560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8163 ER, 12CE, 1390 M M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8163 ER, 12CE, 1390 M M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8163 ER, 12CE, 1390 M M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8163 ER	R8057	ERJ2GEJ680	M 68 OHM, J,0.063W	1	TH-37/42PE50B
R8073	R8058		RESISTOR ARRAY	1	TH-37/42PE50B
R8074	R8059	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-37/42PE50B
R8076	R8073	ERJ2GEJ105	M 1MOHM, J,0.063W	1	TH-37/42PE50B
R8076         ERJ2GEJ222         M 2.2KOHM, J.0.063W         1         TH-37/42PE50B           R8079         ERJ2GEJ103         M 10KOHM, J.0.063W         1         TH-37/42PE50B           R8084,85         D1HG1218A002         NETWORK RESISTER         2         TH-37/42PE50B           R8086-88         ERJ2GEJ560         M 56 OHM, J.0.063W         3         TH-37/42PE50B           R8104         ERJ3GEJ560         M 56 OHM, J.0.063W         1         TH-37/42PE50B           R8104         ERJ2GEJ560         M 56 OHM, J.0.063W         1         TH-37/42PE50B           R8106,07         ERJ2GEJ503         M 10KOHM, J.0.063W         2         TH-37/42PE50B           R8108         ERJ3EKF2202         M 22KOHM, J.166W         1         TH-37/42PE50B           R8110         ERJ3EKF2602         M 2KOHM, J.166W         1         TH-37/42PE50B           R81110         ERJ3EFYEROO         M 0 OHM, J.0.063W         1         TH-37/42PE50B           R8117         ERJ3EFYEROO         M 0 OHM, J.1.063W         1         TH-37/42PE50B           R8117         ERJ3EFYEROO         M 0 OHM, J.0.063W         1         TH-37/42PE50B           R8117         ERJ3EGEJ471         M 470 OHM, J.0.063W         1         TH-37/42PE50B <t< td=""><td>R8074,75</td><td>ERJ2GEJ181</td><td>M 180 OHM, J,0.063W</td><td>2</td><td>TH-37/42PE50B</td></t<>	R8074,75	ERJ2GEJ181	M 180 OHM, J,0.063W	2	TH-37/42PE50B
R8079	R8076	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-37/42PE50B
R8084,85         D1HG1218A002         NETWORK RESISTER         2         TH-37/42PE50B           R8086-88         ERJ2GEJ560         M 56 OHM, J.0.063W         3         TH-37/42PE50B           R8104         ERJ3GEYF181         M 180 OHM, J.1/16W         1         TH-37/42PE50B           R8104         ERJ3GEYEJ560         M 56 OHM, J.0.063W         1         TH-37/42PE50B           R8108         ERJ3EKEZ212         M 20KOHM, J.16W         1         TH-37/42PE50B           R8109         ERJ3EKF2402         M 24KOHM, J.16W         1         TH-37/42PE50B           R8110         ERJ3GEY6200         M 24KOHM, J.16W         1         TH-37/42PE50B           R8110         ERJ3GEY0R00         M 0.0 OHM, J.0.063W         1         TH-37/42PE50B           R8115         ERJ3GEYF272         M 2.7KOHM, J.116W         1         TH-37/42PE50B           R8117         ERJ6GEYJ471         M 470 OHM, J.0.063W         1         TH-37/42PE50B           R8127         ERJ2GEJ600         M 0.0 OHM, J.0.063W         1         TH-37/42PE50B           R8131         ERJ2GEJ600         M 56 OHM, J.0.63W         1         TH-37/42PE50B           R8131         ERJ2GEJ560         M 56 OHM, J.0.063W         1         TH-37/42PE50B	R8078	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	TH-37/42PE50B
R8086-88	R8079	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-37/42PE50B
R8101	R8084,85	D1HG1218A002	NETWORK RESISTER	2	TH-37/42PE50B
R8104	R8086-88	ERJ2GEJ560	M 56 OHM, J,0.063W	3	TH-37/42PE50B
R8106,07 ERJ2GEJ103 M 10KOHM, J,0.063W 2 TH-37/42PE50B R8108 ERJ3EKF2212 M 24KOHM, 1/16W 1 TH-37/42PE50B R8109 ERJ3EKF2402 M 24KOHM, 1/16W 1 TH-37/42PE50B R8110 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R81110 ERJ2GEVR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8112,13 ERJ3GEYPE722 M 2.7KOHM, 1/16W 2 TH-37/42PE50B R8115 ERJ3GEYF272 M 2.7KOHM, 1/16W 1 TH-37/42PE50B R8117 ERJ6GEYJ471 M 470 OHM, J,0.063W 1 TH-37/42PE50B R8124 ERJ2GEJ471 M 470 OHM, J,0.063W 1 TH-37/42PE50B R8124 ERJ2GEDR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8131 ERJ2GEDR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8132 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8133 ERJ3GEYJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R81440,41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R8148,49 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8165-59 ERJ2GEJ390X M 39 OHM, J,0.063W 1 TH-37/42PE50B R8166 ERJ2GEJ390X M 39 OHM, J,0.063W 1 TH-37/42PE50B R8161 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ503 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ503 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8168 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ503 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8179 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8180 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R81819 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEJ103 M 10KOHM, J,0.06	R8101	ERJ3GEYF181	M 180 OHM,J,1/16W	1	TH-37/42PE50B
R8108 ERJ3EKF2212 M 22KOHM, 1/16W 1 TH-37/42PE50B R8109 ERJ3EKF2402 M 24KOHM, 1/16W 1 TH-37/42PE50B R81109 ERJ3EKF2402 M 24KOHM, 1/16W 1 TH-37/42PE50B R8112,13 ERJ3GEY0R00 M 0 OHM, J.0.063W 1 TH-37/42PE50B R8112,13 ERJ3GEY0R00 M 0 OHM, J.0.063W 1 TH-37/42PE50B R8115 ERJ3GEYF272 M 2.7KOHM, 1/16W 1 TH-37/42PE50B R8115 ERJ3GEYF272 M 2.7KOHM, 1/16W 1 TH-37/42PE50B R8117 ERJ6GEYJ471 M 470 OHM, J.1.0063W 1 TH-37/42PE50B R8124 ERJ2GEJ471 M 470 OHM, J.0.063W 1 TH-37/42PE50B R8127 ERJ2GE0R00 M 0.0 OHM, J.0.063W 1 TH-37/42PE50B R8131 ERJ2GE0R00 M 0.0 OHM, J.0.063W 1 TH-37/42PE50B R8133 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8133 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8133 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8140.41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R8140.41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R8144.45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8165.62 ERJ2GEJ390X M 39 OHM, J.0.063W 10 TH-37/42PE50B R8165.62 ERJ2GEJ390X M 39 OHM, J.0.063W 1 TH-37/42PE50B R8165.62 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8165.62 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8165.71 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8167.71 ERJ2GEJ650 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8167 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8167 ERJ2GEJ650 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8167 ERJ2GEJ650 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8167 ERJ2GEJ600 M 0.0 OHM, J.0.063W 1 TH-37/42PE50B R8167 ERJ2GEJ0103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8169 ERJ2GEJ0103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8169 ERJ2GEJ0103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8184 ERJ2GEJ0103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ0103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J.0.	R8104	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8109 ERJ3EKF2402 M 24KOHM, 1/16W 1 TH-37/42PE50B R8110 ERJ2GE0R00 M 0.0 OHM, J_0.063W 1 TH-37/42PE50B R81110 ERJ3GEY0R00 M 0.0 OHM, J_0.063W 1 TH-37/42PE50B R8115 ERJ3GEY2F272 M 2.7KOHM, 1/16W 1 TH-37/42PE50B R8117 ERJ6GEYJ471 M 470 OHM, J_1.0063W 1 TH-37/42PE50B R8117 ERJ6GEYJ471 M 470 OHM, J_0.063W 1 TH-37/42PE50B R8124 ERJ2GEJ471 M 470 OHM, J_0.063W 1 TH-37/42PE50B R8131 ERJ2GE0R00 M 0.0 OHM, J_0.063W 1 TH-37/42PE50B R8131 ERJ2GEJ650 M 50 OHM, J_0.063W 1 TH-37/42PE50B R8131 ERJ2GEJ560 M 50 OHM, J_0.063W 1 TH-37/42PE50B R8132 ERJ2GEJ560 M 56 OHM, J_0.063W 1 TH-37/42PE50B R8133 ERJ3GEYJ560 M 56 OHM, J_0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ121 M 120 OHM, J_0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, J_0.063W 1 TH-37/42PE50B R81444,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8146,49 D1HG3908A002 NETWORK RESISTER 2 TH-37/42PE50B R8165 ERJ2GEJ390X M 39 OHM, J_0.063W 10 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J_0.063W 1 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J_0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J_0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R8172 ERJ2GEJ390X M 30 OHM, J_0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ560 M 56 OHM, J_0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ390X M 30 OHM, J_0.063W 1 TH-37/42PE50B R8166 ERJ2GEJ390X M 30 OHM, J_0.063W 1 TH-37/42PE50B R8167 ERJ2GEJ560 M 56 OHM, J_0.063W 1 TH-37/42PE50B R8168 ERJ2GEJ600 M 56 OHM, J_0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ0103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R8174 ERJ2GEJ103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R8180 ERJ2GEJ600 M 56 OHM, J_0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ6103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R81819 ERJ2GEJ103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R81819 ERJ2GEJ103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J_0.063W 1 TH-37/42PE50B R8196 ERJ2GEJ103 M 10KOHM	R8106,07	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-37/42PE50B
R8110 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8112,13 ERJ3GEYPE727 M 2.7KOHM, 1/16W 2 TH-37/42PE50B R8115 ERJ3GEYF272 M 2.7KOHM, 1/16W 1 TH-37/42PE50B R8117 ERJ6GEYJ471 M 470 OHM, J,0.063W 1 TH-37/42PE50B R8124 ERJ2GEJ471 M 470 OHM, J,0.063W 1 TH-37/42PE50B R8127 ERJ2GEOR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8131 ERJ2GEOR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8132 ERJ2GEOR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8133 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8133 ERJ2GEJ103 M 16KOHM, J,0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ121 M 120 OHM, J,0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ121 M 120 OHM, J,0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R8144,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8144,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8163 ERJ2GEJ390X M 39 OHM, J,0.063W 10 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J,0.063W 1 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J,0.063W 1 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167 E ERJ2GEJ503 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8168 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8169 ERJ2GEJ503 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8172 ERJ2GEJ603 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ73 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8174 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8175 ERJ2GEJ60 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8177 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8186 ERJ2GEJ030 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8187 ERJ2GEJ03 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8188 ERJ2GEJ03 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ03 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ03 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8187 ERJ2GEJ03 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ03 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ03 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ03 M 10KOHM, J,0.063W 1 TH-37/42PE50B	R8108	ERJ3EKF2212	M 22KOHM, 1/16W	1	TH-37/42PE50B
R8112,13 ERJ3GEY0R00 M 0 OHM, 1/16W 2 TH-37/42PE50B R8115 ERJ3GEYF272 M 2.7KOHM, 1/16W 1 TH-37/42PE50B R8117 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 TH-37/42PE50B R8127 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8127 ERJ2GEOR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8131 ERJ2GEDR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8132 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8133 ERJ3GEYJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ101 M 120 OHM, J,0.063W 1 TH-37/42PE50B R8140, 41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R8144.45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8161, 22 ERJ2GEJ390X M 39 OHM, J,0.063W 1 TH-37/42PE50B R8161, 22 ERJ2GEJ390X M 39 OHM, J,0.063W 1 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ390X M 39 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ473 M 47KOHM, J,0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ080 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ500 M 50 OHM, J,0.063W 1 TH-37/42PE50B R8174 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ500 M 56 OHM, J,0.063W 1 TH-37/42PE50B R81817 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R81819 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R81819 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8194 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8197 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8198 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8191 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8214 ERJ2GEJ600 M 50 OHM, J,0.063W 1 TH	R8109	ERJ3EKF2402	M 24KOHM, 1/16W	1	TH-37/42PE50B
R8115 ERJ3GEYF272 M 2.7KOHM, 1/16W 1 TH-37/42PE50B R8117 ERJ6GEYJ471 M 470 OHM, J.1/10W 1 TH-37/42PE50B R8124 ERJ2GEJ471 M 470 OHM, J.0.063W 1 TH-37/42PE50B R8127 ERJ2GEOR00 M 0.0 OHM, J.0.063W 1 TH-37/42PE50B R8131 ERJ2GEOR00 M 0.0 OHM, J.0.063W 1 TH-37/42PE50B R8131 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8132 ERJ2GEJ560 M 56 OHM, J.1/16W 1 TH-37/42PE50B R8133 ERJ3GEYJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8134 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ121 M 120 OHM, J.0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R8144,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8148,49 D1HG3908A002 NETWORK RESISTER 2 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J.0.063W 1 TH-37/42PE50B R8161,62 ERJ2GEJ560 M 56 OHM, J.0.063W 2 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ393 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8172 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8172 ERJ2GEJ13 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8173 ERJ2GEOR00 M 0.0 OHM, J.0.063W 1 TH-37/42PE50B R8174 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8175 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8177 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8178 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8180-82 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8196 ERJ3GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8197 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8198 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8199 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8191 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8196 ERJ3GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8201-04 ERJ2GEJ500 M 56 OHM, J.0.063W 1 TH-	R8110	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
R8117 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 TH-37/42PE50B R8124 ERJ2GEJ471 M 470 OHM, J, 0.063W 1 TH-37/42PE50B R8127 ERJ2GEOR00 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R8131 ERJ2GEOR00 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R8132 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8133 ERJ3GEYJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8133 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ101 M 120 OHM, J, 0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R81414,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R81616,2 ERJ2GEJ390X M 39 OHM, J, 0.063W 10 TH-37/42PE50B R81616,2 ERJ2GEJ390X M 39 OHM, J, 0.063W 2 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ473 M 47KOHM, J, 0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ400 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R8177 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8178 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8179 ERJ2GEJ500 M 50 OHM, J, 0.063W 1 TH-37/42PE50B R8179 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8179 ERJ2GEJ500 M 50 OHM, J, 0.063W 1 TH-37/42PE50B R8184 ERJ2GEJ223 M 22KOHM, J, 0.063W 1 TH-37/42PE50B R8185 ERJ3GEYJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8186 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8188 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8197 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8198 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8199 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R821	R8112,13	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-37/42PE50B
R8117 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 TH-37/42PE50B R8124 ERJ2GEJ471 M 470 OHM, J, 0.063W 1 TH-37/42PE50B R8127 ERJ2GEOR00 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R8131 ERJ2GEOR00 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R8132 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8133 ERJ3GEYJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8133 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ101 M 120 OHM, J, 0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R81414,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R81616,2 ERJ2GEJ390X M 39 OHM, J, 0.063W 10 TH-37/42PE50B R81616,2 ERJ2GEJ390X M 39 OHM, J, 0.063W 2 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ473 M 47KOHM, J, 0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ400 M 0.0 OHM, J, 0.063W 1 TH-37/42PE50B R8177 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8178 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8179 ERJ2GEJ500 M 50 OHM, J, 0.063W 1 TH-37/42PE50B R8179 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8179 ERJ2GEJ500 M 50 OHM, J, 0.063W 1 TH-37/42PE50B R8184 ERJ2GEJ223 M 22KOHM, J, 0.063W 1 TH-37/42PE50B R8185 ERJ3GEYJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8186 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8188 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8197 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8198 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8199 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R821	R8115	ERJ3GEYF272	M 2.7KOHM, 1/16W	1	TH-37/42PE50B
R8124 ERJ2GEJ471 M 470 OHM, J,0.063W 1 TH-37/42PE50B R8127 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8131 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8132 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8133 ERJ3GEYJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ121 M 120 OHM, J,0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R8144,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8148,49 D1HG3908A002 NETWORK RESISTER 2 TH-37/42PE50B R81616,62 ERJ2GEJ390X M 39 OHM, J,0.063W 10 TH-37/42PE50B R8161,62 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J,0.063W 5 TH-37/42PE50B R8172 ERJ2GEJ473 M 47KOHM, J,0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ600 M 50 OHM, J,0.063W 1 TH-37/42PE50B R8174 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8184 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8185 ERJ3GEYJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8186 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8187 ERJ3GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8188 ERJ2GEJ26J0 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ26J0 M 10.0 OHM, J,0.063W 1 TH-37/42PE50B R8181 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8181 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8181 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8197 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216, 17 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8216, 17 ERJ2GEJ560 M 56 OHM, J,0		<del>,</del>		1	TH-37/42PE50B
R8127 ERJ2GE0R00 M 0.0 OHM, J.0.063W 1 TH-37/42PE50B R8131 ERJ2GEDR00 M 0.0 OHM, J.0.063W 1 TH-37/42PE50B R8132 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8133 ERJ3GEYJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ121 M 120 OHM, J.0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ121 M 120 OHM, J.0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R8144,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8148,49 D1HG3908A002 NETWORK RESISTER 2 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J.0.063W 10 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J.0.063W 2 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ360 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ600 M 0.0 OHM, J.0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ703 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8177 ERJ2GEJ703 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8180 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8181 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8181 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8186 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8187 ERJ3GEYJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8188 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8196 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8214 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J.0.063W 1 TH-37/42PE50B R8216, T ERJ2GEJ560 M 56 OHM, J.0.063W 1 TH-37/42PE50B R8216, T ERJ2GEJ560 M 56 OHM, J.0.063W				1	
R8131 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8132 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8133 ERJ3GEYJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8136 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ121 M 120 OHM, J,0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, J,0.063W 1 TH-37/42PE50B R8144,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8148,49 D1HG3908A002 NETWORK RESISTER 2 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J,0.063W 10 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J,0.063W 2 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8172 ERJ2GEJ473 M 47KOHM, J,0.063W 1 TH-37/42PE50B R8173 ERJ2GEOR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8174 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8180-82 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R81810 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R81810 ERJ2GEJ223 M 22KOHM, J,0.063W 1 TH-37/42PE50B R81810 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8197 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8198 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8199 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8214 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216 TERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216 TERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8217 ERJ2GEJ103 M 10KOHM, J,0.	R8127			1	
R8132 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8133 ERJ3GEYJ560 M 56 OHM, J,1/16W 1 TH-37/42PE50B R8136 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ121 M 120 OHM, J,0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, I/16W 2 TH-37/42PE50B R8144,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8148,49 D1HG3908A002 NETWORK RESISTER 2 TH-37/42PE50B R8160-59 ERJ2GEJ390X M 39 OHM, J,0.063W 10 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J,0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8172 ERJ2GEJ473 M 47KOHM, J,0.063W 1 TH-37/42PE50B R8173 ERJ2GEOR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,1/16W 1 TH-37/42PE50B R8180-82 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8177 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8178 ERJ2GEOR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8179 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8180-82 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R81818 ERJ2GEJ2323 M 22KOHM, J,0.063W 1 TH-37/42PE50B R8185 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8191 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8197 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8198 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8201-04 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8214 ERJ2GEJ560 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216, T ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8225 ERJ2GEJ560 M 56 OHM, J,0.063W				1	
R8133 ERJ3GEYJ560 M 56 OHM, J, 1/16W 1 TH-37/42PE50B R8136 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ121 M 120 OHM, J, 0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, 1/16W 2 TH-37/42PE50B R8144,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8148,49 D1HG3908A002 NETWORK RESISTER 2 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J, 0.063W 10 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J, 0.063W 2 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ473 M 47KOHM, J, 0.063W 1 TH-37/42PE50B R8174 ERJ2GEJ560 M 50 OHM, J, 0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ50 M 50 OHM, J, 0.063W 1 TH-37/42PE50B R81861-82 ERJ2GEJ50 M 50 OHM, J, 0.063W 1 TH-37/42PE50B R81868-82 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R81869-82 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R81881-84 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8181 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8196 ERJ3GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8214 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J, 0.063W 1 TH-37/42PE50B R8216 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8217 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8223 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B R8223 ERJ2GEJ560 M 56 OHM, J, 0.063W 1 TH-37/42PE50B				1	
R8136 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8137 ERJ2GEJ121 M 120 OHM, J,0.063W 1 TH-37/42PE50B R8140,41 ERJ3EKF1001 M 1KOHM, J/16W 2 TH-37/42PE50B R8144,45 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8148,49 D1HG3908A002 NETWORK RESISTER 2 TH-37/42PE50B R81616,62 ERJ2GEJ390X M 39 OHM, J,0.063W 10 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8173 ERJ2GEJ473 M 47KOHM, J,0.063W 1 TH-37/42PE50B R8174 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R81861 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8186 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8186 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8186 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8188 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8189 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8214 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8217 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8218 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8216 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8225 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B				1	
R8137         ERJ2GEJ121         M 120 OHM, J,0.063W         1         TH-37/42PE50B           R8140,41         ERJ3EKF1001         M 1KOHM, 1/16W         2         TH-37/42PE50B           R8144,45         D1HG5608A002         NETWORK RESISTER         2         TH-37/42PE50B           R8148,49         D1HG3908A002         NETWORK RESISTER         2         TH-37/42PE50B           R8150-59         ERJ2GEJ390X         M 39 OHM, J,0.063W         10         TH-37/42PE50B           R8161,62         ERJ2GEJ560         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8163         ERJ2GEJ560         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8165         ERJ2GEJ560         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8167-71         ERJ2GEJ103         M 10KOHM, J,0.063W         1         TH-37/42PE50B           R8172         ERJ2GEJ473         M 47KOHM, J,0.063W         1         TH-37/42PE50B           R8175         ERJ3GEYJ103         M 10KOHM, J,0.063W         1         TH-37/42PE50B           R8176         ERJ2GEJ500         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8180-82         ERJ2GEJ50         M 56 OHM, J,0.063W         1         TH-37/42PE50B     <				+	
R8140,41         ERJ3EKF1001         M 1KOHM, 1/16W         2         TH-37/42PE50B           R8144,45         D1HG5608A002         NETWORK RESISTER         2         TH-37/42PE50B           R8148,49         D1HG3908A002         NETWORK RESISTER         2         TH-37/42PE50B           R8150-59         ERJ2GEJ390X         M 39 OHM, J,0.063W         1         TH-37/42PE50B           R8161,62         ERJ2GEJ560         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8163         ERJ2GEJ560         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8163         ERJ2GEJ560         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8167-71         ERJ2GEJ103         M 10KOHM, J,0.063W         5         TH-37/42PE50B           R8172         ERJ2GEJ473         M 47KOHM, J,0.063W         1         TH-37/42PE50B           R8173         ERJ2GEJ103         M 10KOHM, J,0.063W         1         TH-37/42PE50B           R8175         ERJ3GEYJ103         M 10KOHM, J,0.063W         1         TH-37/42PE50B           R8180-82         ERJ2GEJ560         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8184         ERJ2GEJ103         M 10KOHM, J,0.063W         1         TH-37/42PE50B </td <td></td> <td><del></del></td> <td></td> <td>+</td> <td></td>		<del></del>		+	
R8144,45         D1HG5608A002         NETWORK RESISTER         2         TH-37/42PE50B           R8148,49         D1HG3908A002         NETWORK RESISTER         2         TH-37/42PE50B           R8150-59         ERJ2GEJ390X         M 39 OHM, J,0.063W         10         TH-37/42PE50B           R8161,62         ERJ2GEJ560         M 56 OHM, J,0.063W         2         TH-37/42PE50B           R8163         ERJ2GEJ560         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8165         ERJ2GEJ560         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8167-71         ERJ2GEJ103         M 10KOHM, J,0.063W         5         TH-37/42PE50B           R8172         ERJ2GEJ473         M 47KOHM, J,0.063W         1         TH-37/42PE50B           R8173         ERJ2GEDR00         M 0.0 OHM, J,0.063W         1         TH-37/42PE50B           R8175         ERJ3GEYJ103         M 10KOHM, J,0.063W         1         TH-37/42PE50B           R8180-82         ERJ2GEJ60         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8183         ERJ2GEJ223         M 22KOHM, J,0.063W         1         TH-37/42PE50B           R8184         ERJ2GEJ103         M 10KOHM, J,0.063W         1         TH-37/42PE50B     <		<del> </del>		+	
R8148,49         D1HG3908A002         NETWORK RESISTER         2         TH-37/42PE50B           R8150-59         ERJ2GEJ390X         M 39 OHM, J,0.063W         10         TH-37/42PE50B           R8161,62         ERJ2GEJ390X         M 39 OHM, J,0.063W         2         TH-37/42PE50B           R8163         ERJ2GEJ560         M 56 OHM, J,0.063W         1         TH-37/42PE50B           R8165         ERJ2GEJ103         M 10KOHM, J,0.063W         5         TH-37/42PE50B           R8167-71         ERJ2GEJ473         M 47KOHM, J,0.063W         1         TH-37/42PE50B           R8172         ERJ2GEJ473         M 47KOHM, J,0.063W         1         TH-37/42PE50B           R8173         ERJ2GED700         M 0.0 OHM, J,0.063W         1         TH-37/42PE50B           R8175         ERJ3GEYJ103         M 10KOHM, J,1/16W         1         TH-37/42PE50B           R8176         ERJ2GEJ103         M 10KOHM, J,0.063W         1         TH-37/42PE50B           R8180-82         ERJ2GEJ560         M 56 OHM, J,0.063W         3         TH-37/42PE50B           R8184         ERJ2GEJ103         M 22KOHM, J,0.063W         1         TH-37/42PE50B           R81857         ERJ2GEJ103         M 10KOHM, J,0.063W         1         TH-37/42PE50B </td <td></td> <td>ļ</td> <td></td> <td>+</td> <td></td>		ļ		+	
R8150-59 ERJ2GEJ390X M 39 OHM, J,0.063W 10 TH-37/42PE50B R8161,62 ERJ2GEJ390X M 39 OHM, J,0.063W 2 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J,0.063W 5 TH-37/42PE50B R8172 ERJ2GEJ473 M 47KOHM, J,0.063W 1 TH-37/42PE50B R8173 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8180-82 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R818183 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8184 ERJ2GEJ223 M 22KOHM, J,0.063W 1 TH-37/42PE50B R8185,86 ERJ2GEJ101 M 100 OHM, J,0.063W 1 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8214 ERJ2GEDJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216,17 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8218,19 D1HG33080001 NETWORK RESISTER 2 TH-37/42PE50B R8223 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B					
R8161,62 ERJ2GEJ390X M 39 OHM, J,0.063W 2 TH-37/42PE50B R8163 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J,0.063W 5 TH-37/42PE50B R8172 ERJ2GEJ473 M 47KOHM,J,0.063W 1 TH-37/42PE50B R8173 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8180-82 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8183 ERJ2GEOR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8184 ERJ2GEJ223 M 22KOHM, J,0.063W 1 TH-37/42PE50B R8185,86 ERJ2GEJ101 M 100 OHM, J,0.063W 2 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8210-04 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8211 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216,17 ERJ2GEJ560 M 56 OHM, J,0.063W 2 TH-37/42PE50B R8218,19 D1HG33080001 NETWORK RESISTER 2 TH-37/42PE50B R8223 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8223 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B		ļ	ļ		
R8163 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8165 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8167-71 ERJ2GEJ103 M 10KOHM, J,0.063W 5 TH-37/42PE50B R8172 ERJ2GEJ473 M 47KOHM, J,0.063W 1 TH-37/42PE50B R8173 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8180-82 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8183 ERJ2GEOR00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8184 ERJ2GEJ223 M 22KOHM, J,0.063W 1 TH-37/42PE50B R8185,86 ERJ2GEJ101 M 100 OHM, J,0.063W 2 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8214 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216,17 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8218,19 D1HG33080001 NETWORK RESISTER 2 TH-37/42PE50B R8223 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8223 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B				+	
R8165         ERJ2GEJ560         M 56 OHM, J,0.063W         1 TH-37/42PE50B           R8167-71         ERJ2GEJ103         M 10KOHM, J,0.063W         5 TH-37/42PE50B           R8172         ERJ2GEJ473         M 47KOHM,J,0.063W         1 TH-37/42PE50B           R8173         ERJ2GE0R00         M 0.0 OHM, J,0.063W         1 TH-37/42PE50B           R8175         ERJ3GEYJ103         M 10KOHM,J,1/16W         1 TH-37/42PE50B           R8176         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8180-82         ERJ2GEJ560         M 56 OHM, J,0.063W         3 TH-37/42PE50B           R8183         ERJ2GEJ223         M 22KOHM, J,0.063W         1 TH-37/42PE50B           R8184         ERJ2GEJ101         M 100 OHM, J,0.063W         2 TH-37/42PE50B           R8187         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8193         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8195         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8196         ERJ3GEYJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8214         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8215         ERJ2GEJ560         M 56 OHM, J,0.063W<		ļ			
R8167-71       ERJ2GEJ103       M 10KOHM, J,0.063W       5 TH-37/42PE50B         R8172       ERJ2GEJ473       M 47KOHM,J,0.063W       1 TH-37/42PE50B         R8173       ERJ2GE0R00       M 0.0 OHM, J,0.063W       1 TH-37/42PE50B         R8175       ERJ3GEYJ103       M 10KOHM,J,1/16W       1 TH-37/42PE50B         R8176       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8180-82       ERJ2GEJ560       M 56 OHM, J,0.063W       3 TH-37/42PE50B         R8183       ERJ2GEDR00       M 0.0 OHM, J,0.063W       1 TH-37/42PE50B         R8184       ERJ2GEJ223       M 22KOHM, J,0.063W       1 TH-37/42PE50B         R8185,86       ERJ2GEJ101       M 100 OHM, J,0.063W       2 TH-37/42PE50B         R8187       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8193       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8196       ERJ3GEYJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8214       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8215       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8216,17       ERJ2GEJ560       M 56 OHM, J,0.063W       1 TH-37/42PE50B         R8218,19       D1HG33080001					
R8172 ERJ2GEJ473 M 47KOHM,J,0.063W 1 TH-37/42PE50B R8173 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8175 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 TH-37/42PE50B R8176 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8180-82 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8183 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8184 ERJ2GEJ223 M 22KOHM, J,0.063W 1 TH-37/42PE50B R8185,86 ERJ2GEJ101 M 100 OHM, J,0.063W 2 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J,0.063W 4 TH-37/42PE50B R8214 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216,17 ERJ2GEJ560 M 56 OHM, J,0.063W 2 TH-37/42PE50B R8220-22 D1HG5608A002 NETWORK RESISTER 2 TH-37/42PE50B R8223 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8223 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8225 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B		<del>                                     </del>		-	
R8173         ERJ2GE0R00         M 0.0 OHM, J,0.063W         1 TH-37/42PE50B           R8175         ERJ3GEYJ103         M 10KOHM,J,1/16W         1 TH-37/42PE50B           R8176         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8180-82         ERJ2GEJ560         M 56 OHM, J,0.063W         3 TH-37/42PE50B           R8183         ERJ2GED800         M 0.0 OHM, J,0.063W         1 TH-37/42PE50B           R8184         ERJ2GEJ223         M 22KOHM, J,0.063W         1 TH-37/42PE50B           R8185,86         ERJ2GEJ101         M 100 OHM, J,0.063W         2 TH-37/42PE50B           R8187         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8193         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8195         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8196         ERJ3GEYJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8214         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8215         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8216,17         ERJ2GEJ560         M 56 OHM, J,0.063W         2 TH-37/42PE50B           R8218,19         D1HG5608A002         NETWORK R				_	
R8175         ERJ3GEYJ103         M 10KOHM,J,1/16W         1 TH-37/42PE50B           R8176         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8180-82         ERJ2GEJ560         M 56 OHM, J,0.063W         3 TH-37/42PE50B           R8183         ERJ2GE0R00         M 0.0 OHM, J,0.063W         1 TH-37/42PE50B           R8184         ERJ2GEJ223         M 22KOHM, J,0.063W         1 TH-37/42PE50B           R8185,86         ERJ2GEJ101         M 100 OHM, J,0.063W         2 TH-37/42PE50B           R8187         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8193         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8195         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8201-04         ERJ2GEJ103         M 10KOHM, J,0.063W         4 TH-37/42PE50B           R8214         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8215         ERJ2GEJ103         M 10KOHM, J,0.063W         1 TH-37/42PE50B           R8216,17         ERJ2GEJ560         M 56 OHM, J,0.063W         2 TH-37/42PE50B           R8218,19         D1HG33080001         NETWORK RESISTER         2 TH-37/42PE50B           R8220-22         D1HG5608A002         NETWO				<del>-</del>	
R8176       ERJ2GEJ103       M 10KOHM, J,0.063W       1       TH-37/42PE50B         R8180-82       ERJ2GEJ560       M 56 OHM, J,0.063W       3       TH-37/42PE50B         R8183       ERJ2GEOR00       M 0.0 OHM, J,0.063W       1       TH-37/42PE50B         R8184       ERJ2GEJ223       M 22KOHM, J,0.063W       1       TH-37/42PE50B         R8185,86       ERJ2GEJ101       M 100 OHM, J,0.063W       2       TH-37/42PE50B         R8187       ERJ2GEJ103       M 10KOHM, J,0.063W       1       TH-37/42PE50B         R8193       ERJ2GEJ103       M 10KOHM, J,0.063W       1       TH-37/42PE50B         R8195       ERJ2GEJ103       M 10KOHM, J,0.063W       1       TH-37/42PE50B         R8201-04       ERJ2GEJ103       M 10KOHM, J,0.063W       1       TH-37/42PE50B         R8214       ERJ2GEJ103       M 10KOHM, J,0.063W       1       TH-37/42PE50B         R8215       ERJ2GEJ560       M 56 OHM, J,0.063W       1       TH-37/42PE50B         R8216,17       ERJ2GEJ560       M 56 OHM, J,0.063W       2       TH-37/42PE50B         R8220-22       D1HG5608A002       NETWORK RESISTER       2       TH-37/42PE50B         R8223       ERJ2GEJ103       M 10KOHM, J,0.063W       1       TH				+	
R8180-82       ERJ2GEJ560       M 56 OHM, J,0.063W       3 TH-37/42PE50B         R8183       ERJ2GEDR00       M 0.0 OHM, J,0.063W       1 TH-37/42PE50B         R8184       ERJ2GEJ223       M 22KOHM, J,0.063W       1 TH-37/42PE50B         R8185,86       ERJ2GEJ101       M 100 OHM, J,0.063W       2 TH-37/42PE50B         R8187       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8193       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8195       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8196       ERJ3GEYJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8201-04       ERJ2GEJ103       M 10KOHM, J,0.063W       4 TH-37/42PE50B         R8214       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8215       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8216,17       ERJ2GEJ560       M 56 OHM, J,0.063W       2 TH-37/42PE50B         R8218,19       D1HG33080001       NETWORK RESISTER       2 TH-37/42PE50B         R8223       ERJ2GEJ560       M 56 OHM, J,0.063W       1 TH-37/42PE50B         R8225       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8231       ERJ3GEYJ330				+	
R8183 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8184 ERJ2GEJ223 M 22KOHM, J,0.063W 1 TH-37/42PE50B R8185,86 ERJ2GEJ101 M 100 OHM, J,0.063W 2 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J,0.063W 4 TH-37/42PE50B R8214 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216,17 ERJ2GEJ560 M 56 OHM, J,0.063W 2 TH-37/42PE50B R8218,19 D1HG33080001 NETWORK RESISTER 2 TH-37/42PE50B R8220-22 D1HG5608A002 NETWORK RESISTER 3 TH-37/42PE50B R8223 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8225 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8225 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B				+	
R8184       ERJ2GEJ223       M 22KOHM, J,0.063W       1 TH-37/42PE50B         R8185,86       ERJ2GEJ101       M 100 OHM, J,0.063W       2 TH-37/42PE50B         R8187       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8193       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8195       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8196       ERJ3GEYJ103       M 10KOHM, J,1/16W       1 TH-37/42PE50B         R8201-04       ERJ2GEJ103       M 10KOHM, J,0.063W       4 TH-37/42PE50B         R8214       ERJ2GEJ000       M 0.0 OHM, J,0.063W       1 TH-37/42PE50B         R8215       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8216,17       ERJ2GEJ560       M 56 OHM, J,0.063W       2 TH-37/42PE50B         R8218,19       D1HG33080001       NETWORK RESISTER       2 TH-37/42PE50B         R8220-22       D1HG5608A002       NETWORK RESISTER       3 TH-37/42PE50B         R8223       ERJ2GEJ560       M 56 OHM, J,0.063W       1 TH-37/42PE50B         R8225       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8231       ERJ3GEYJ330       M 33 OHM,J,1/16W       1 TH-37/42PE50B		ł		+	
R8185,86 ERJ2GEJ101 M 100 OHM, J,0.063W 2 TH-37/42PE50B R8187 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J,0.063W 4 TH-37/42PE50B R8214 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216,17 ERJ2GEJ560 M 56 OHM, J,0.063W 2 TH-37/42PE50B R8218,19 D1HG33080001 NETWORK RESISTER 2 TH-37/42PE50B R8220-22 D1HG5608A002 NETWORK RESISTER 3 TH-37/42PE50B R8223 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8223 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8221 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8223 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8221 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8221 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 TH-37/42PE50B				+	
R8187 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8193 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J,0.063W 4 TH-37/42PE50B R8214 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216,17 ERJ2GEJ560 M 56 OHM, J,0.063W 2 TH-37/42PE50B R8218,19 D1HG33080001 NETWORK RESISTER 2 TH-37/42PE50B R8220-22 D1HG5608A002 NETWORK RESISTER 3 TH-37/42PE50B R8223 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8225 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8221 ERJ2GEJ360 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8223 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8231 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 TH-37/42PE50B				+	
R8193 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J,0.063W 4 TH-37/42PE50B R8214 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216,17 ERJ2GEJ560 M 56 OHM, J,0.063W 2 TH-37/42PE50B R8218,19 D1HG33080001 NETWORK RESISTER 2 TH-37/42PE50B R8220-22 D1HG5608A002 NETWORK RESISTER 3 TH-37/42PE50B R8223 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8225 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8221 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8221 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B				-	
R8195 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8196 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 TH-37/42PE50B R8201-04 ERJ2GEJ103 M 10KOHM, J,0.063W 4 TH-37/42PE50B R8214 ERJ2GE0R00 M 0.0 OHM, J,0.063W 1 TH-37/42PE50B R8215 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8216,17 ERJ2GEJ560 M 56 OHM, J,0.063W 2 TH-37/42PE50B R8218,19 D1HG33080001 NETWORK RESISTER 2 TH-37/42PE50B R8220-22 D1HG5608A002 NETWORK RESISTER 3 TH-37/42PE50B R8223 ERJ2GEJ560 M 56 OHM, J,0.063W 1 TH-37/42PE50B R8225 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8231 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 TH-37/42PE50B				+	
R8196       ERJ3GEYJ103       M 10KOHM,J,1/16W       1 TH-37/42PE50B         R8201-04       ERJ2GEJ103       M 10KOHM, J,0.063W       4 TH-37/42PE50B         R8214       ERJ2GEOR00       M 0.0 OHM, J,0.063W       1 TH-37/42PE50B         R8215       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8216,17       ERJ2GEJ560       M 56 OHM, J,0.063W       2 TH-37/42PE50B         R8218,19       D1HG33080001       NETWORK RESISTER       2 TH-37/42PE50B         R8220-22       D1HG5608A002       NETWORK RESISTER       3 TH-37/42PE50B         R8223       ERJ2GEJ560       M 56 OHM, J,0.063W       1 TH-37/42PE50B         R8225       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8231       ERJ3GEYJ330       M 33 OHM,J,1/16W       1 TH-37/42PE50B				+	
R8201-04       ERJ2GEJ103       M 10KOHM, J,0.063W       4 TH-37/42PE50B         R8214       ERJ2GE0R00       M 0.0 OHM, J,0.063W       1 TH-37/42PE50B         R8215       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8216,17       ERJ2GEJ560       M 56 OHM, J,0.063W       2 TH-37/42PE50B         R8218,19       D1HG33080001       NETWORK RESISTER       2 TH-37/42PE50B         R8220-22       D1HG5608A002       NETWORK RESISTER       3 TH-37/42PE50B         R8223       ERJ2GEJ560       M 56 OHM, J,0.063W       1 TH-37/42PE50B         R8225       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8231       ERJ3GEYJ330       M 33 OHM,J,1/16W       1 TH-37/42PE50B				<del> </del>	
R8214       ERJ2GE0R00       M 0.0 OHM, J,0.063W       1 TH-37/42PE50B         R8215       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8216,17       ERJ2GEJ560       M 56 OHM, J,0.063W       2 TH-37/42PE50B         R8218,19       D1HG33080001       NETWORK RESISTER       2 TH-37/42PE50B         R8220-22       D1HG5608A002       NETWORK RESISTER       3 TH-37/42PE50B         R8223       ERJ2GEJ560       M 56 OHM, J,0.063W       1 TH-37/42PE50B         R8225       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8231       ERJ3GEYJ330       M 33 OHM,J,1/16W       1 TH-37/42PE50B				+	
R8215       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8216,17       ERJ2GEJ560       M 56 OHM, J,0.063W       2 TH-37/42PE50B         R8218,19       D1HG33080001       NETWORK RESISTER       2 TH-37/42PE50B         R8220-22       D1HG5608A002       NETWORK RESISTER       3 TH-37/42PE50B         R8223       ERJ2GEJ560       M 56 OHM, J,0.063W       1 TH-37/42PE50B         R8225       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8231       ERJ3GEYJ330       M 33 OHM,J,1/16W       1 TH-37/42PE50B				<del>                                     </del>	
R8216,17       ERJ2GEJ560       M 56 OHM, J,0.063W       2 TH-37/42PE50B         R8218,19       D1HG33080001       NETWORK RESISTER       2 TH-37/42PE50B         R8220-22       D1HG5608A002       NETWORK RESISTER       3 TH-37/42PE50B         R8223       ERJ2GEJ560       M 56 OHM, J,0.063W       1 TH-37/42PE50B         R8225       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8231       ERJ3GEYJ330       M 33 OHM,J,1/16W       1 TH-37/42PE50B			1 1	+	
R8218,19       D1HG33080001       NETWORK RESISTER       2       TH-37/42PE50B         R8220-22       D1HG5608A002       NETWORK RESISTER       3       TH-37/42PE50B         R8223       ERJ2GEJ560       M 56 OHM, J,0.063W       1       TH-37/42PE50B         R8225       ERJ2GEJ103       M 10KOHM, J,0.063W       1       TH-37/42PE50B         R8231       ERJ3GEYJ330       M 33 OHM,J,1/16W       1       TH-37/42PE50B				+	
R8220-22       D1HG5608A002       NETWORK RESISTER       3 TH-37/42PE50B         R8223       ERJ2GEJ560       M 56 OHM, J,0.063W       1 TH-37/42PE50B         R8225       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8231       ERJ3GEYJ330       M 33 OHM,J,1/16W       1 TH-37/42PE50B		ł		+	
R8223       ERJ2GEJ560       M 56 OHM, J,0.063W       1 TH-37/42PE50B         R8225       ERJ2GEJ103       M 10KOHM, J,0.063W       1 TH-37/42PE50B         R8231       ERJ3GEYJ330       M 33 OHM,J,1/16W       1 TH-37/42PE50B		<u> </u>		+	
R8225 ERJ2GEJ103 M 10KOHM, J,0.063W 1 TH-37/42PE50B R8231 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 TH-37/42PE50B		ł		+-	
R8231 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 TH-37/42PE50B				+	
				+	
IR8232.33   IERJ2GEJ330   IM 33 OHM. J.0.063W   1.2   ITH-37/42PF50B				+	
	K8232,33	ERJZGEJ330	IVI 33 UHIVI, J,0.063W	12	TH-37/42PE50B

İ				
R8235	ERJ2GEJ330	M 33 OHM, J,0.063W	1	TH-37/42PE50B
R8238-43	ERJ2GEJ330	M 33 OHM, J,0.063W	6	TH-37/42PE50B
R8245,46	ERJ2GEJ330	M 33 OHM, J,0.063W	2	TH-37/42PE50B
R8250	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-37/42PE50B
R8252-54	ERJ2GEJ330	M 33 OHM, J,0.063W	3	TH-37/42PE50B
R8255-57	ERJ2GEJ103	M 10KOHM, J,0.063W	3	TH-37/42PE50B
R8259	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	TH-37/42PE50B
R8260-63	ERJ2GEJ560	M 56 OHM, J,0.063W	4	TH-37/42PE50B
R8264-68	ERJ2GEJ103	M 10KOHM, J,0.063W	5	TH-37/42PE50B
R8269	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8271	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8272	EXB38V560J	RESISTOR ARRAY	1	TH-37/42PE50B
R8273	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8275	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8277	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8279	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
R8282	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8284	ERJ8GEY0R00	M 0 OHM, 1/8W	1	TH-37/42PE50B
R8286,87	ERJ2GEJ560	M 56 OHM, J,0.063W	2	TH-37/42PE50B
R8290	EXB38V560J	RESISTOR ARRAY	<del>  -</del>	TH-37/42PE50B
R8291,92	ERJ2GEJ560	M 56 OHM, J,0.063W	1 2	TH-37/42PE50B
R8308,09	ERJ2GE0R00	M 0.0 OHM, J,0.063W	12	TH-37/42PE50B
R8310-15	ERJ3EKF75R0	M 0.75HM, 1/16W	6	TH-37/42PE50B
R8319	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	TH-37/42PE50B
R8320	ERJ3EKF1002	M 10KOHM, 1/16W	<del>                                     </del>	TH-37/42PE50B
	<del> </del>	· ·	+	
R8321	ERJ3EKF8201	M 8.2KOHM, 1/16W	1 1	TH-37/42PE50B
R8349	ERJ2GEJ104	M 100KOHM, J,0.063W	1	TH-37/42PE50B
R8350	ERJ3EKF8201	M 8.2KOHM, 1/16W	1	TH-37/42PE50B
R8351	ERJ3EKF1002	M 10KOHM, 1/16W	1	TH-37/42PE50B
R8352	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	TH-37/42PE50B
R8353	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	TH-37/42PE50B
R8354	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	TH-37/42PE50B
R8355,56	EXB2HV104JV	RESISTOR ARRAY	2	TH-37/42PE50B
R8366	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-37/42PE50B
R8367,68	ERJ2GEJ560	M 56 OHM, J,0.063W		TH-37/42PE50B
	ERJ2GEJ560	M 56 OHM, J,0.063W		TH-37/42PE50B
R8386	J0JCC0000078	CHIP INDUCTOR	1	TH-37/42PE50B
R8401	ERJ8GEY0R00	M 0 OHM, 1/8W	1	TH-37/42PE50B
R8402	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-37/42PE50B
R8414	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
R8415,16	ERJ2GEJ223	M 22KOHM, J,0.063W	2	TH-37/42PE50B
R8417,18	EXB38V473J	RESISTOR ARRAY	2	TH-37/42PE50B
R8419,20	EXB38V101J	RESISTOR ARRAY	2	TH-37/42PE50B
R8421	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-37/42PE50B
R8422	ERJ3GEYF331	M 330 OHM,J,1/16W	1	TH-37/42PE50B PAVCCZ
R8424	ERJ8RSJR10	M 1 OHM, 1/8W	1	TH-37/42PE50B
R8425,26	EXB38V101J	RESISTOR ARRAY	2	TH-37/42PE50B
R8427-31	ERJ2GEJ560	M 56 OHM, J,0.063W	5	TH-37/42PE50B
R8433,34	EXB38V560J	RESISTOR ARRAY	2	TH-37/42PE50B
R8435	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-37/42PE50B
R8443	EXB38V560J	RESISTOR ARRAY	1	TH-37/42PE50B
R8444	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-37/42PE50B
R8445,46	ERJ2GEJ560	M 56 OHM, J,0.063W	2	TH-37/42PE50B
R8447	ERJ2GEJ223	M 22KOHM, J,0.063W	1	TH-37/42PE50B
R8448	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-37/42PE50B
R8449,50	ERJ2GEJ103	M 10KOHM, J,0.063W		TH-37/42PE50B
R8451	EXB38V104J	RESISTOR ARRAY	<del>  -</del>	TH-37/42PE50B
R8452	ERJ2GEJ104	M 100KOHM, J,0.063W	1	TH-37/42PE50B
R8453	EXB38V104J	RESISTOR ARRAY	1 1	TH-37/42PE50B
<u> </u>	+		+-	

I	I	1	1 .	<b>L</b>
R8454	ERJ2GEJ104	M 100KOHM, J,0.063W	1	TH-37/42PE50B
R8456-59	EXB38V560J	RESISTOR ARRAY	4	TH-37/42PE50B
R8460	ERJ2GEJ104	M 100KOHM, J,0.063W	1	TH-37/42PE50B
R8461	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8462,63	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-37/42PE50B
R8464	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8465	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-37/42PE50B
R8466	EXB38V560J	RESISTOR ARRAY	1	TH-37/42PE50B
R8467,68	ERJ2GEJ560	M 56 OHM, J,0.063W	2	TH-37/42PE50B
R8469	EXB38V560J	RESISTOR ARRAY	1	TH-37/42PE50B
R8474	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
R8475,76	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-37/42PE50B
R8477,78	ERJ2GEJ560	M 56 OHM, J,0.063W	2	TH-37/42PE50B
R8479	ERJ2GEJ203	M 20KOHM,J,0.063W	1	TH-37/42PE50B
R8480-82	ERJ2GEJ560	M 56 OHM, J,0.063W	3	TH-37/42PE50B
R8483	ERJ2GEJ203	M 20KOHM,J,0.063W	1	TH-37/42PE50B
R8484	ERJ2GEJ223	M 22KOHM, J,0.063W	1	TH-37/42PE50B
R8485	ERJ2GEJ333	M 33KOHM, J,0.063W	1	TH-37/42PE50B
R8486	ERJ2GEJ223	M 22KOHM, J,0.063W	1	TH-37/42PE50B
R8487	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8488	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
R8489	ERJ2GEJ102	M 1KOHM, J,0.063W	1	TH-37/42PE50B
R8491	ERJ3EKF9102	M91.0KOHM, 1/16W	1	TH-37/42PE50B
R8492	ERJ3EKF9101	M 9.1KOHM, 1/16W	1	TH-37/42PE50B
R8493	ERJ3EKF9102	M91.0KOHM, 1/16W	1	TH-37/42PE50B
R8494	ERJ3EKF1202	M 12KOHM, 1/16W	1	TH-37/42PE50B
R8495,96	EXB38V560J	RESISTOR ARRAY	2	TH-37/42PE50B
R8497	ERJ3EKF7500	M 750 OHM, 1/16W	$\frac{1}{1}$	TH-37/42PE50B
R8498	ERJ3EKF6800	M 680 OHM, 1/16W	1	TH-37/42PE50B
R8499	ERA3YED243	M 24KOHM 1/16W	<del>                                     </del>	TH-37/42PE50B
R8500	ERJ3EKF1052	M10.5KOHM, 1/16W	<del>                                     </del>	TH-37/42PE50B
R8501	ERJ3EKF2322	M23.2KOHM, 1/16W	1	TH-37/42PE50B
R8502	ERJ3EKF1003	M 100KOHM, 1/16W	1	TH-37/42PE50B
R8503,04	ERJ2GEJ103	M 10KOHM, J,0.063W	1 2	TH-37/42PE50B
R8505	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-37/42PE50B
	ERJ2GEJ101	M 100 OHM, J,0.063W		TH-37/42PE50B
R8546	ERJ2GEJ333	M 33KOHM, J,0.063W	1	TH-37/42PE50B
R8547	ERJ2GEJ102	M 1KOHM, J,0.063W	1	TH-37/42PE50B
R8602-04	ERJ2GEJ101	M 100 OHM, J,0.063W	3	TH-37/42PE50B
R8605,06	ERJ2GEJ104	M 100KOHM, J,0.063W	2	TH-37/42PE50B
R8608	ERJ2GEJ105	M 1MOHM, J,0.063W	1	TH-37/42PE50B
R8610	ERJ2GEJ332	M 3.3KOHM, J,0.063W	<del>                                     </del>	TH-37/42PE50B
R8611	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-37/42PE50B
R8614	ERJ2GEJ221	M 220 OHM, J,0.063W	1	TH-37/42PE50B
R8615	ł	M 0.0 OHM, J,0.063W	1	
	ERJ2GE0R00 ERJ2GEJ103	M 10KOHM, J,0.063W		TH-37/42PE50B
R8706-09			4	TH-37/42PE50B
R8711	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-37/42PE50B
R8712	EXB38V560J	RESISTOR ARRAY	1 1	TH-37/42PE50B
R8713	EXB38V103J	RESISTOR ARRAY	1	TH-37/42PE50B
R8714-16	ERJ2GEJ560	M 56 OHM, J,0.063W	3	TH-37/42PE50B
R8802	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
R8821	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
R8827,28	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	TH-37/42PE50B
R8830	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-37/42PE50B
R8862-64	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	TH-37/42PE50B
R8899,00	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-37/42PE50B
R8912	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
R8927,28	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-37/42PE50B
R8930	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-37/42PE50B
•	•	•		-

<u></u>	I	I		<b>L</b>
R8931,32	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	TH-37/42PE50B
R8933	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
R8954	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-37/42PE50B
R8960	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-37/42PE50B
R8962-64	ERJ2GEJ101	M 100 OHM, J,0.063W	3	TH-37/42PE50B
R8967,68	EXB2HV473JV	RESISTOR ARRAY	2	TH-37/42PE50B PAVCCZ
R8969-71	ERJ2GEJ473	M 47KOHM,J,0.063W	3	TH-37/42PE50B
R8980	ERJ2GEJ102	M 1KOHM, J,0.063W	1	TH-37/42PE50B
R8981-87	ERJ2GE0R00	M 0.0 OHM, J,0.063W	7	TH-37/42PE50B
R8989,90	ERJ2GEJ102	M 1KOHM, J,0.063W	2	TH-37/42PE50B
R9002	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9004-06	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9007	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9009	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9010	EXB2HV272JV	RESISTOR ARRAY	1	
R9012	EXB2HV272JV	RESISTOR ARRAY	1	
R9013	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9015-18	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9020,21	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9022	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9023	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R9024	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9026	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9028	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9029,30	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9031,32	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9033,34	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9035,36	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9039	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9040	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9041	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9042	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9043,44	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R9045	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9046	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R9047-50	TAJAAH0101JV	M 100 OHM,J,1/16W	4	
R9052	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9053	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9054,55	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R9056,57	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9058,59	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9060-67	TAJAAH0101JV	M 100 OHM,J,1/16W	8	
R9068-72	ERJ3GEYJ103	M 10KOHM,J,1/16W	5	
R9073	EXB2HV470JV	RESISTOR ARRAY	1	
R9074	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9075	EXB2HV470JV	RESISTOR ARRAY	1	
R9076	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9077-79	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9077-79	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
		<u> </u>	<u> </u>	
R9081	ERJ3GEYJ103 TAJAAH0101JV	M 10KOHM,J,1/16W	8	
R9082-89	<del>,                                    </del>	M 100 OHM, J, 1/16W		
R9090	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R9091,92	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9093	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9094	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9095-98	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9102-04	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
R9105	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	<u> </u>

R9107-09	ERJ3GEYJ393	M 39KOHM,J,1/16W	3	
R9110	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9111,12	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9113	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9114-16	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9117,18	EXB38VR000	RESISTOR ARRAY	2	
R9119	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9120,21	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R9122-24	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9125,26	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9127,28	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9130	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9131-33	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	3	
R9134-36	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
R9137	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9140-42	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9145-47	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9160,61	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9162,63	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9164,65	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R9200-02	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
R9204	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R9205	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9208	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9210	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9210	1	M 0 OHM, 1/16W	1	
	ERJ3GEY0R00		5	
R9300-04	D1HG33080001	NETWORK RESISTER	_	
R9305	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9306,07	D1HG33080001	NETWORK RESISTER	2	
R9308	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9309	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9313-16	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9318,19	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9323	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9324-28	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9329	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9330-33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9335,36	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9337	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
R9338	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
R9339-42	ERJ6ENF1001	M 1KOHM, 1/10W	4	
R9500-03	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9505-10	TAJAAH0101JV	M 100 OHM,J,1/16W	6	
R9511	EXB2HV272JV	RESISTOR ARRAY	1	
R9512	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9513	EXB2HV272JV	RESISTOR ARRAY	1	
R9515	EXB2HV272JV	RESISTOR ARRAY	1	
R9516,17	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9518	EXB2HV470JV	RESISTOR ARRAY	1	
R9519-21	EXB38V470J	RESISTOR ARRAY	3	
R9522,23	EXB2HV470JV	RESISTOR ARRAY	2	
R9524-26	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
R9527	EXB38V470J	RESISTOR ARRAY	1	
R9528,29	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R9531	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9533,34	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9536	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
	+	, , , , , , , , , , , , , , , , , , , ,	_	

1				
R9537,38	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9540	ERJ3GEYJ304V	M 300KOHM,J,1/16W	1	
R9544	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9547	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9700	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9702-04	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9706,07	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9708	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9709	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9714	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9716,17	ERJL14KJ33M	M 33 OHM, J,1/4W	2	
R9718	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9719	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
R9720	ERJ6ENF6342	M6.34KOHM, 1/10W	1	
R9721	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9722,23	ERJ3GEYJ100	M 10 OHM,J,1/16W	2	1
R9724	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9725	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9726,27	ERJ3GEYJ100	M 10 OHM,J,1/16W	2	
R9728,29	ERJ6ENF2002	M 20KOHM, 1/10W	2	
R9738,39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9740-42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R9824	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9830	EXB2HV470JV	RESISTOR ARRAY	1	
R9900	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9901	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9902	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9903	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9904	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9905	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9906	EXB2HV470JV	RESISTOR ARRAY	1	
R9907	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9908,09	EXB38V470J	RESISTOR ARRAY	2	
R9910,11	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	<u> </u>
R9912	EXB2HV470JV	RESISTOR ARRAY	1	
R9913	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9914	EXB38V470J	RESISTOR ARRAY	1	
R9915,16	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9917-19	EXB2HV470JV	RESISTOR ARRAY	3	
R9922	EXB2HV470JV	RESISTOR ARRAY	-	
R9923	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
RM2510	PNA4601M05TV	REMOCO RECEIVER	1	
RTL	TNPA3519AB	CIRCUIT BOARD DG	1	TH-37/42PA50E PAVCCZ 🛆
RTL	TNPA3519AD	CIRCUIT BOARD DG	1	TH-37/42PE50B PAVCCZ 🛆
RTL	TNPA3520AC	CIRCUIT BOARD H	1	TH-37/42PA50E PAVCCZ 🛆
RTL	TNPA3520AD	CIRCUIT BOARD H	1	TH-37/42PE50B PAVCCZ △
RTL	TNPA3620AB	CIRCUIT BOARD PA	1	PAVCCZ 🛆
RTL	TNPA3621AE	CIRCUIT BOARD Z	1	PAVCCZ A
RTL	TNPA3521	CIRCUIT BOARD TA	1	TH-37/42PA50E PAVCCZ A
RTL	TNPA3521AB	CIRCUIT BOARD TA	1	TH-37/42PE50B PAVCCZ A
RTL	TNP0EXV01AC	CIRCUIT BOARD XV	1	TH-37/42PE50B PAVCCZ A
RTL	TNPA3545	CIRCUIT BOARD C1	1	42 INCH 🛆
RTL	TNPA3541	CIRCUIT BOARD C1	1	37 INCH 🛆
RTL	TNPA3546	CIRCUIT BOARD C2	-	42 INCH 🛆
RTL	TNPA3542	CIRCUIT BOARD C2	1	37 INCH 🕰
RTL	TZTNP010YFS	CIRCUIT BOARD D	₩	PAVCCZ A
-	121111 01011 0		+ '-	I AVOUZ

RTL	TNPA3570	CIRCUIT BOARD P	1	<u> </u>
RTL	TNPA3643AB	CIRCUIT BOARD PB		PAVCCZ A
RTL	TNPA3543	CIRCUIT BOARD SC	+	42 INCH 🛆
RTL	TNPA3543AB	CIRCUIT BOARD SC	1	37 INCH △
			+ •	
RTL	TNPA3243	CIRCUIT BOARD SD	1	42 INCH △
RTL	TNPA3233	CIRCUIT BOARD SD	-	37 INCH △
RTL	TNPA3544	CIRCUIT BOARD SS	1	42 INCH 🛆
RTL	TNPA3544AB	CIRCUIT BOARD SS	1	37 INCH △
RTL	TNPA3242	CIRCUIT BOARD SU	1	42 INCH △
RTL	TNPA3232	CIRCUIT BOARD SU	1	37 INCH △
RTL	TNPA3603AB	CIRCUIT BOARD K	1	TH-37/42PE50B PAVCCZ △
RTL	TNPA3603AC	CIRCUIT BOARD K	1	TH-37/42PA50E PAVCCZ 🛆
RTL	TNPA3604AB	CIRCUIT BOARD S	1	PAVCCZ 🛆
S1	K1KA03AA0193	3P CONNECTOR	1	
SC2	K1KA06AA0192	6P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23	K1KA03AA0193	3P CONNECTOR	1	
SC30	K1KA03AA0193	3P CONNECTOR	1	
SC41,42	K1ML80BA0001	80P CONNECTOR	2	
	K1KA10A00431	10P CONNECTOR	2	
SD1-D3		80P CONNECTOR	3	
SD46	K1KA10B00209	10P CONNECTOR	1	
SS11	K1KA07AA0192	7P CONNECTOR	1	
SS12	K1KA05AA0192	5P CONNECTOR	1	
SS23	K1KA12AA0194	12P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	4	42 INCH
SS41-44 SS41A-44A	K1MN13B00020 K1MN13B00020	13P CONNECTOR 13P CONNECTOR	4	42 INCH 37 INCH
SU1-U3	K1MN80B00020	80P CONNECTOR	3	37 111011
SU45	K1KA10B00209	10P CONNECTOR	1	
SW2500	K0F162B00002	SWITCH	1	
	EVQ11G05R	SWITCH	5	
	EVQPLHA15	SWITCH	1	
T6461		SWITCHING TRANS	1	
T6471	ETS19AA259AC	SWITCHING TRANS	1	
TA5	K1KB15B00013	15P CONNECTOR	1	
TA6	K1KB09B00019	9P CONNECTOR	1	
TU001	ENG37A12GF	TUNER	1	TH-37/42PA50E PAVCCZ 🛆
TU001	ENGF7301GF	TUNER	1	TH-37/42PE50B PAVCCZ △
TU8001	ENV87H06D8F	TUNER	1	TH-37/42PE50B PAVCCZ 🛆
VR6074	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6477		CONTROL 2KOHMB 0.3W	1	
VR6557	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
X1101	H0J600400006	CRYSTAL	1	
X2101	TSSA128	CRYSTAL	1	
X2102	EFCT6504BN	CRYSTAL	1	TH-37/42PA50E
X2103	EFCT7004BN	CRYSTAL	1	TH-37/42PA50E
X4002	H0J270500087	CRYSTAL	1	
X8003	H0J241500001	CRYSTAL	1	TH-37/42PE50B PAVCCZ
X8006	H0J270500090	CRYSTAL	1	TH-37/42PE50B PAVCCZ
X9000	H2D2705A0004	CRYSTAL	1	
X9200 XV01	H0J200500038	CRYSTAL 110B CONNECTOR	1	TU 27/42DE50D
XV01 XV04	K1KAB0A00010 K1KA04BA0050	110P CONNECTOR 4P CONNECTOR	1	TH-37/42PE50B TH-37/42PE50B
Z2	K1KA05AA0192	5P CONNECTOR	1	
	1 1111111111111111111111111111111111111	O CONTRECTOR	+	<u> </u>

750	K4MN12EA 00042	25D CONNECTOD	۱,	1
		35P CONNECTOR	1	
	K9ZZ00000424	CONNECTOR	4	
		CONNECTOR	4	40 181011
		TERMINAL		42 INCH
		TERMINAL	1	10 10 10
		TERMINAL		42 INCH
		TERMINAL	1	
		TERMINAL	3	
		TERMINAL	1	
		TERMINAL	_	42 INCH
		TERMINAL		37 INCH
		TERMINAL		42 INCH
ZA7201		TERMINAL	1	
		TERMINAL	1	40 INIOLI
ZA7204		TERMINAL	_	42 INCH
ZA9001	K4CD01000013	TERMINAL	1	
ZMM1	TMM25401	CLAMPER	1	
C402		C 100PF, J, 50V	1	
C403	ECKCNA222MEB	C 2200PF, M	1	<b>△</b>
C404	F0CAF105A021	C 1UF, 250V	1	<u> </u>
C405	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C407	ECA2WHG220	E 22UF, 450V	1	
	F0CAF105A021	C 1UF, 250V	1	Δ
		C 1UF, K, 25V	1	
	ECJ2XB1H103K		4	
		C 1000PF, J, 1KV	2	
C417		C 0.01UF, K, 50V	1	
C418		C 1UF, Z, 50V	1	
C419	F1A3A102A040	C 1000PF, J, 1KV	1	
C421,22		C 0.01UF, K, 50V	2	
C423		C 4700PF, K, 50V	1	
C424	F1A3A102A040	C 1000PF, J, 1KV	1	
C425		C 0.01UF, K, 50V	1	
C426		C 470PF, J, 50V	1	
C427		C 1UF, Z, 50V	1	
		C 220PF, J, 50V	1	
	F1K2J1530002	C 0.15PF, J,630V	2	
		C 1000PF, K, 50V	1	
		C 1UF, Z, 50V	3	
	F1J1C1050011	C 1UF, Z, 50V	1	
C440	ECA1HM100	E 10UF, 50V	1	
C443,44	F1A3A102A040	C 1000PF, J, 1KV	2	
C445	F1J1C1050011	C 1UF, Z, 50V	1	
C446		C 390UF, 450V	1	
C451	F1A3A101A040	C 100PF, J, 1KV	1	
C457		P 0.013UF,J,1.2KV	1	
C459		C 0.15PF, J,630V	1	
C460,61		E 330UF, 1KV	2	
C462		C 1UF, K, 25V	1	
C463	ECJ2XC1H220J	C 22UF, J, 50V	1	
C465		C 220PF, M,	1	Δ
C467	ECKCNA221KB7		1	<u>~</u> <u>A</u>
				<u></u>
C468		C 0.01UF, K, 50V	1	Δ.
C470	F0CAF105A021	C 1UF, 250V	1	Δ
C471	F1J1C1050011	C 1UF, Z, 50V	1	
C473	ECKCNA221KB7	C 220PF, M,	1	⚠
C476	ECKCNA221KB7	C 220PF, M,	1	⚠

•				
C482	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C490	ECJ2XC1H331J	C 330PF, J, 50V	1	
C491	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C492	ECJ2XC1H271J	C 270PF, J, 50V	1	
C493	ECA1EM101	E 100UF, 25V	1	
C494,95	ECJ2XC1H101J	C 100PF, J, 50V	2	
C496	F1J1C1050011	C 1UF, Z, 50V	1	
C497	ECA1EM221	E 220UF, 25V	1	
C498	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C501-03	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
C504	F1J1C1050011	C 1UF, Z, 50V	1	
C505	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C506-08		C 0.01UF, K, 50V	3	
C509	ECA1EM101	E 100UF, 25V	1	
C510	ECJ2XB1H104K		1	
C511	ECA1EM331	E 330UF, 25V	1	
C512-14	ECJ2XC1H471J		3	
C515	ECA1CM222	E 2200UF, 16V	1	
C516		C 0.47UF, K, 16V	1	
C517	F2D1E1010001	E 10UF, 25V	1	
C518,19	F1J1C1050011	C 1UF, Z, 50V	2	
C523	ECJ3YB1E105K	C 1UF, K, 25V	1	
C525	F2A1E8210012	E 820UF, 25V	1	
C526	ECJ2XB1H104K		1	
C526	<b>.</b>	C 0.1UF, K, 50V	1	
	ECJ3YB1E475K	C 4.7UF, K, 25V		
C528,29 C530	F1J1C1050011	C 1UF, Z, 50V	1	
	ECJ2VB1H333K	C 0.033UF, K, 50V		
C533	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C534	ECJ2XC1H471J	C 470PF, J, 50V	1	
C546,47	ECJ2VB1H333K	C 0.033UF, K, 50V	2	
C548	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C551-53	ECJ2XB1H104K	C 0.1UF, K, 50V	3	
C554	F1J1C1050011	C 1UF, Z, 50V	1	
C555	ECA2AM101	E 100UF, 100V	1	
C556	F2A1C1520009	E 1500UF, 16V	1	
C557	F2A1E1520089	E 1500UF, 25V	1	
C562	ECJ2XB1H104K		1	
C572	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C574	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C577	ECA2AM330	E 33UF, 100V	1	
C581	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C583	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C584	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C587	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C591,92	F1K2J1530002	C 0.15PF, J,630V	2	
C601	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C603	ECA1HM470	E 47UF, 50V	1	
C604,05	F2A2C1510004	E 150UF, 160V	2	
C606,07	F1J1C1050011	C 1UF, Z, 50V	2	
C608,09	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C610	F1J1C1050011	C 1UF, Z, 50V	1	
C611	F2B2D1720001	E 1700UF,@ 200V	1	
C612	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C615	F2B2D1720001	E 1700UF,@ 200V	1	
C616	F1A3A102A040	C 1000PF, J, 1KV	1	
C619	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C620	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C623	ECA1HM100	E 10UF, 50V	1	
C624	ECJ3YB1E105K	C 1UF, K, 25V	1	
H	+	· · · ·		

C626	_	C 0.01UF, K, 50V	1	
C629	<del> </del>	C 0.01UF, K, 50V	1	
C631	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C633	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C634	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C635	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C636	F1J1C1050011	C 1UF, Z, 50V	1	
C637	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C638,39	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C640	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C641	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C643	ECA1HM470	E 47UF, 50V	1	
C646,47	ECJ2XC1H331J	C 330PF, J, 50V	2	
D401	B0FBAT000006	DIODE	1	
D402	MA4240MTA	ZENER DIODE	1	
D403	MA4051NM	ZENER DIODE	1	
D404	B0EBKT000007	DIODE	1	
D406	MA4200M	ZENER DIODE	1	
D407	MA188	DIODE	1	
D410	MA111	DIODE	1	
D411	B0BB17000010	DIODE	1	
D412-14	MA111	DIODE	3	
D415	B0JAME000081	DIODE	1	
D417	RU30A	DIODE	1	
D418	MA4082M	ZENER DIODE	1	
D419,20	RU30A	DIODE	2	
D423	MA188	DIODE	<del>                                     </del>	
D425	MA188	DIODE	1	
D427-29	ERA15-10	DIODE	3	
D431	B0JCDD000002	DIODE	1	
D433	MA4150M	ZENER DIODE	1	
D434	MA4082M	ZENER DIODE	1 1	
D435	ERA15-10	DIODE	1 1	
D436	MA188	DIODE	1 1	
D437	MA4082M	ZENER DIODE	1	
D438	MA4150M	ZENER DIODE	1	
D439	MA4130HTA	ZENER DIODE	1	
D440	MA4300M	ZENER DIODE	1	
D441	B0HAMM000122		1	
D441	MA4075M	ZENER DIODE	1	
D442 D443	MA4240MTA	ZENER DIODE	1	
D444	-	DIODE	1	
D445	MA165	DIODE	1	
D459	MA188	DIODE	1	
D461	MA4082M	ZENER DIODE	1	
D461	MA142WKTX	ZENER DIODE	1	
D462 D463-67	ERA15-10	DIODE	5	
	-		1	
D501	B0HANR000016 MA165	DIODE	2	
D503,04 D505	B0JAME000081	DIODE	1	
D505	MA4051NM	ZENER DIODE	1	
D507,08	MA4150M	ZENER DIODE	2	
D509,10	-	DIODE		
D511	B0HBSM000043	DIODE ZENER DIODE	1	
D514	MA4062M	ZENER DIODE	1	
D521	B0HAMP000067	DIODE	1	
D528,29	MA153	DIODE	2	
D530	MA4100M	ZENER DIODE	1	
D531,32	B0HAPR000012	DIODE	2	

ln = 0.4	lna ina casasas	bione	1.4	1
D534	B0JBSG000026	DIODE	1	
D535	MA188	DIODE	1	
D536	B0JBSL000013	DIODE	1	
D538	MA3051M	ZENER DIODE	1	
D539	B0HBRP000007	DIODE	1	
D542	MA4180HTA	ZENER DIODE	1	
D543	MA4150M	ZENER DIODE	1	
D544,45	MA4180HTA	ZENER DIODE	2	
D549	MA4075M	ZENER DIODE	1	
D551	MA4130M	ZENER DIODE	1	
D552	MA4082M	ZENER DIODE	1	
D555	MA4075M	ZENER DIODE	1	
D559 D563	MA4075M MA4062M	ZENER DIODE ZENER DIODE	<del>                                     </del>	
D564	MA7200ATA	ZENER DIODE	<del>                                     </del>	PAVCCZ
D565	MA4160M	ZENER DIODE	1 1	PAVCCZ
D566	B0HAMM000122		<del>                                     </del>	
D568	MA3J142D0L	DIODE	<del>                                     </del>	
D569-71	MA4300M	ZENER DIODE	3	
		_	1	
D572 D574	MA188 MA111	DIODE	1 1	
D574 D575	MA188	DIODE	1	
D575 D579	MA111	DIODE	<del>                                     </del>	
D579 D582	MAZ705600F	ZENER DIODE	<del>                                     </del>	
D584	MA4075M	ZENER DIODE	<del>                                     </del>	
D586	B0HAMP000067	DIODE	1	
D587	MA188	DIODE	<del>                                     </del>	
	1		<del>-</del>	<u>A</u>
IC401	CNC1S171R	IC .	1	Δ.
IC402	C0BBAA000038	IC	1	4
IC403,04	CNC1S171R	IC	2	Δ
IC406	C0DAZZZ00021	IC	1	
IC407	C0DBAZZ00111	IC	1	
IC408,09	CNC1S171R	IC	2	<u>A</u>
IC411	C0BBAA000038	IC	1	
IC412	CNC1S171R	IC	1	<b>∆</b>
IC501	C2ABDD000064	IC	1	
IC502	C0EBH0000190	IC	1	
IC503,04	C0DAEMB00004	IC	2	
IC505	CNC1S171R	IC	1	
IC506	C0ZBZ0000878	IC	1	
IC507	C0CBABE00023	IC	1	
IC509	C0DABZZ00010	IC	1	
IC512	C0DAEMB00004	IC	1	
IC520	C9ZB00000496	IC	1	
J501,02	LSJW0001	CABLE	2	
L402	EXCELSA24	BEAD CHOKE	1	
L403	EXCELSA35	BEAD CHOKE	1	
L404,05	G0B123K00003	INDUCTION COIL	2	⚠
L501	EXCELSA35	BEAD CHOKE	1	
L502	TALL08N102JA	INDUCTION COIL	1	
L506	EXCELDR25C	BEAD CHOKE	1	
L509	J0JBC0000032	CHIP INDUCTOR	1	
L510	EXCELDR25C	BEAD CHOKE	1	
P2	K1KA06AA0479	6P CONNECTOR	1	
P5	K1KA11AA0183	11P CONNECTOR	1	
P9	K1KA03A00537	3P CONNECTOR	1	
P10	K1KA06AA0182	6P CONNECTOR	1	
1	1			l l

•			_	
P11	K1KA07AA0192	7P CONNECTOR	1	
P12	K1KA05AA0192	5P CONNECTOR	1	
P23	K1KA03AA0182	3P CONNECTOR	1	
P25	K1KA20AA0178	20P CONNECTOR	1	
P30	K1KA05AA0182	5P CONNECTOR	1	
PR401	K5Y502BA0001	FUSE	1	
PR402	K5G202B00015	FUSE	1	
PR501	K5H502Z00003	FUSE	1	
PR503	K5H502Z00003	FUSE	1	
PR509	K5H501Z00005	FUSE	1	
PR601	K5G312B00012	FUSE	1	
Q401	B1CHND000004	TRANSISTOR	1	
Q403	B1CBGD000001	TRANSISTOR	1	
Q404	B1BCCF000022	TRANSISTOR	1	
Q406	B1DEHQ000007	TRANSISTOR	1	
Q407	XN4601	TRANSISTOR	1	
Q408,09	B1CHND000004	TRANSISTOR	2	
Q412,13	B1DAGQ000013	TRANSISTOR	2	
Q412,13 Q414	B1ABCF000134	TRANSISTOR	1	
Q415	2SB1218ARL	TRANSISTOR	1	
Q415 Q417	B1CHND000004	TRANSISTOR	1	
			<del> </del>	
Q418	2SD1819A	TRANSISTOR	1	
Q420-22	2SD1819A	TRANSISTOR	3	
Q423,24	B1CBGD000001	TRANSISTOR	2	
Q430	B1CEJQ000002	TRANSISTOR	1	
Q431	B1DEGS000001	TRANSISTOR	1	
Q432	B1CEJQ000002	TRANSISTOR	1	
Q433	B1CBGD000001	TRANSISTOR	1	
Q434	B1CEJQ000002	TRANSISTOR	1	
Q435	B1CBGD000001	TRANSISTOR	1	
Q436	B1CEJQ000002	TRANSISTOR	1	
Q438	B1CBGD000001	TRANSISTOR	1	
Q439	B1CHND000004	TRANSISTOR	1	
Q440,41	2SD1819A	TRANSISTOR	2	
Q501,02	2SD1820A	TRANSISTOR	2	
Q503	XN0440100L	TRANSISTOR	1	
Q505	B1CEJQ000002	TRANSISTOR	1	
Q506	B1CHND000004	TRANSISTOR	1	
Q507	B1DAGQ000013	TRANSISTOR	1	
Q508	XN0450100L	TRANSISTOR	1	
Q509	XN0440100L	TRANSISTOR	1	
Q510	B1DHBD000004	TRANSISTOR	1	
Q511	B1CFND000005	TRANSISTOR	1	
Q512	B1CBGD000001	TRANSISTOR	1	
Q516	B1DHBD000004	TRANSISTOR	1	
Q517	B1HFCFA00021	TRANSISTOR	1	
Q518	B1DEHL000018	TRANSISTOR	1	
Q519	B1DEHF000002	TRANSISTOR	1	
Q520	B1HFCFA00021	TRANSISTOR	1	
Q525	B1CBGD000001	TRANSISTOR	1	
Q527	B1DEHL000018	TRANSISTOR	1	
Q530	B1CBGD000001	TRANSISTOR	1	
Q535	2SD1819A	TRANSISTOR	1	
Q536-38	B1CFQD000001	TRANSISTOR	3	
Q541	B1CBGD000001	TRANSISTOR	1	
Q544	XN0440100L	TRANSISTOR	1	
Q550	B1CHGD000006	TRANSISTOR	1	
Q551,52	B1CBGD000001	TRANSISTOR	2	
Q553	2SD1819A	TRANSISTOR	1	
2000		1	<u> </u>	<u> </u>

î				
Q554	+	TRANSISTOR	1	
Q557	2SD1819A	TRANSISTOR	1	
Q558	B1CHHG000002	TRANSISTOR	1	
Q559	2SD1819A	TRANSISTOR	1	
Q560	+	TRANSISTOR	1	
Q561,62	2SD1819A	TRANSISTOR	2	
Q564,65	2SD1819A	TRANSISTOR	2	
Q567	B1CBGD000001	TRANSISTOR	1	
R401	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R402	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R403	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R404	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R405	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R407	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R408	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R410,11	D1F5100E0002	F 3.3 OHM, 5W	2	<u>A</u>
R412	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R413	D1F5100E0002	F 3.3 OHM, 5W	1	Δ
R414	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R415	ERJ6GEYJ103	M 10KOHM,J,1/10W	$\frac{1}{1}$	
R416	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	$\frac{1}{1}$	
R417	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R418	ERJ6GEYJ473	M 47KOHM,J,1/10W	$\frac{1}{1}$	
R419	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R420	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
R421	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R422	ERJ8GEYJ181	M 180 OHM, J,1/8W	1	
R423	ERJ6GEYJ154	M 150KOHM,J,1/10W	1	
R424	ERJ6GEYJ223	M 22KOHM,J,1/10W	<del>                                     </del>	
R425	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	$\frac{1}{1}$	
R426	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R427	ERJ6GEYJ334	M 330KOHM,J,1/10W	$\frac{1}{1}$	
R428	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R429	ERJ8GEYJ103	M 10KOHM, J,1/8W	1	
R430	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R431	ERJ6GEYJ103	M 10KOHM,J,1/10W	$\frac{1}{1}$	
R432	ERJ8GEYJ103	M 10KOHM, J,1/8W	$\frac{1}{1}$	
R433	ERJ6ENF1202	M 12KOHM, 1/10W	<del>                                     </del>	
R435	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R436	ERJ8GEYJ153	M 15KOHM, J,1/8W	<del>                                     </del>	
R437	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R438	ERJ6GEYJ331	M 330 OHM,J,1/10W	<del>                                     </del>	
R439	ERG12SJ120	M 12 OHM, J,1/2W	1	
R440	ERJ8GEYJ474	M 470KOHM, J,1/8W	$\frac{1}{1}$	
R441,42	ERJ6EKF6803	M 680KOHM, 1/10W	2	
R443	EVMAASA00B23	CONTROL 2KOHMB	$\frac{2}{1}$	
R444	ERJ6GEYJ123		<del>                                     </del>	
R445	ERJ6ENF1003	M 12KOHM,J,1/10W M 100KOHM, 1/10W	<del>                                     </del>	
R445 R446	ERX2SJR39H	M0.39 OHM, J, 2W	1	
	<del></del>			
R447	ERJ6ENF3302	M 33KOHM, 1/10W	1 2	
R448,49	D0XGR10JA007	RESISTOR ARRAY	_	
R450	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R451	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R452	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R453	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R454	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R455	ERJ6GEYJ106	M 10MOHM,J,1/10W	1	
R456,57	ERJ6GEYJ333	M 33KOHM,J,1/10W	2	
1		I	I	Ī

1	i		
R458	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1
R461	ERJ6GEYJ102	M 1KOHM,J,1/10W	1
R462	ERJ6ENF4303	M 430KOHM, 1/10W	1
R463	ERJ6GEYJ333	M 33KOHM,J,1/10W	1
R464	ERJ6ENF3302	M 33KOHM, 1/10W	1
R465	ERJ6ENF5603	M 560KOHM, 1/10W	1
R466,67	ERJ6GEYJ102	M 1KOHM,J,1/10W	2
R468	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1
R469	ERJ6GEYJ103	M 10KOHM,J,1/10W	1
R470	ERX2SJR39H	M0.39 OHM, J, 2W	1
R471	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1
R472,73	ERJ6ENF5603	M 560KOHM, 1/10W	2
R474	ERG1SJ104P	M 100KOHM, J, 1W	1
R475	ERJ6EKF6803	M 680KOHM, 1/10W	1
R476,77	ERJ14YJ181U	M 181 OHM, J,1/4W	2
R478	ERJ8GEYJ220	M 22 OHM, J,1/8W	1
R479	ERG1SJ104P	M 100KOHM, J, 1W	1
R480	ERJ6ENF9102	M91.0KOHM, 1/10W	1
R481	ERJ6GEYJ106	M 10MOHM,J,1/10W	1
R482	ERJ8GEYJ220	M 22 OHM, J,1/8W	1
R483	ERJ6GEYJ106	M 10MOHM,J,1/10W	1
R485	ERJ6GEYJ102	M 1KOHM,J,1/10W	1
R486,87	ERJ6GEYJ682	M 6.8KOHM,J,1/10W	2
R488	ERJ6GEYJ106	M 10MOHM,J,1/10W	1
R489	ERJ6GEYJ102	M 1KOHM,J,1/10W	1
R490,91	ERJ6GEYJ473	M 47KOHM,J,1/10W	2
R492	ERJ6GEYJ220	M 22 OHM,J,1/10W	1
R493	ERG12SJ120	M 12 OHM, J,1/2W	1
R494-96	ERJ6ENF5603	M 560KOHM, 1/10W	3
R497	ERJ6ENF2402	M 24KOHM, 1/10W	1
R501	ERJ6GEYJ223	M 22KOHM,J,1/10W	1
R502,03	ERJ6GEYJ104	M 100KOHM,J,1/10W	2
R504	ERJ6GEYJ102	M 1KOHM,J,1/10W	1
R505	ERJ8GEYJ330	M 33 OHM, J,1/8W	1
R506	ERJ6GEYJ102	M 1KOHM,J,1/10W	1
R507	ERJ6GEYJ221	M 220 OHM,J,1/10W	1
R508	ERJ6GEYJ102	M 1KOHM,J,1/10W	1
R509-11	ERJ6GEYJ104	M 100KOHM,J,1/10W	3
R512	ERJ6GEYJ223	M 22KOHM,J,1/10W	1
R513,14	ERJ6GEYJ104	M 100KOHM,J,1/10W	2
R515,16	ERJ6GEYJ102	M 1KOHM,J,1/10W	2
R517	ERJ6GEYJ103	M 10KOHM,J,1/10W	1
R518	ERJ6GEYJ101	M 100 OHM,J,1/10W	1
R519,20	ERJ6GEYJ104	M 100KOHM,J,1/10W	2
R521,22	ERJ8GEYJ100	M 10 OHM, J,1/8W	2
R523	ERJ6GEYJ102	M 1KOHM,J,1/10W	1
R524	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1
R525	ERJ6GEYJ473	M 47KOHM,J,1/10W	11
R526,27	ERJ8GEYJ224	M 220KOHM, J,1/8W	2
R528	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1
R530	ERJ6RBD3302	M 3.3KOHM,F,1/10W	11
R531	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	11
R532	ERJ6GEYJ101	M 100 OHM,J,1/10W	11
R533	ERJ8GEYJ223	M 22KOHM, J,1/8W	11
R534	ERJ8GEYJ224	M 220KOHM, J,1/8W	11
R535,36	ERJ6GEYJ102	M 1KOHM,J,1/10W	2
R535,30	ERJ6ENF3602	M 36KOHM, 1/10W	1
R538	ERJ6GEYJ104	M 100KOHM, J,1/10W	1
R539	ERJ6RBD1002	M 1.0KOHM, 1/10W	11
1003	LI 1001/DD 1002	1.01(011101, 1/1000	+ ' +

1				
R540	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R541	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R542	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R543	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R544	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R545	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R546,47	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R548	ERJ8GEYJ102	M 1KOHM, J,1/8W	1	
R549	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R550	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R551	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R552	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R553	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R554	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R555,56	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R557	ERJ8GEYJ471	M 470 OHM, J,1/8W	1	
R558	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R559	ERJ6RBD4702	M 47KOHM, 1/10W	1	
R560	ERJ6ENF1302	M 13KOHM, 1/10W	1	
R561	ERJ6ENF4301	M 4.3KOHM, 1/10W	1	
R562	ERJ6ENF1802	M 18KOHM, 1/10W	1	
	ERJ6GEYJ2R2		-	
R563		M 2.2 OHM, J, 1/10W	1	
R564	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R565	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R566	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R567	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R568,69	ERG2SJ181	M 180 OHM, J, 2W	2	
R570	ERJ8GEYJ102	M 1KOHM, J,1/8W	1	
R571	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R572,73	ERJ8ENF3900	M 390 OHM, 1/8W	2	
R574	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R575	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R576	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R577,78	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R579	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R580,81	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R582	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R583	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R584	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R585	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R586,87	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R588	ERJ8ENF3900	M 390 OHM, 1/8W	1	
R589,90	ERJ8GEYJ123	M 12KOHM, J,1/8W	2	
R591	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R592	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R593	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R594	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R595	ERJ8GEYJ222	M 2.2KOHM, J,1/8W	1	
R596	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R597,98	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R599,00	ERJ8GEYJ391	M 390 OHM, J,1/8W	2	
R601	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R602	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R603	ERJ6GEYJ332	M 3.3KOHM, J,1/10W	1	
			<del>                                     </del>	
R604	ERJ6GEYJ122	M 1.2KOHM, J, 1/10W	1 1	
R606	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R607	ERJ6GEYJ822	M 8.2KOHM,J,1/10W		
R608	ED 10 CEV 1000	M 2 2KOLIM 1 4 /0\M	4	
R609	ERJ8GEYJ332 ERJ6GEYJ822	M 3.3KOHM, J,1/8W M 8.2KOHM,J,1/10W	1	

R610,11	ERJ6GEYJ103	M 10KOHM,J,1/10W	2
R612	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1
R613	ERJ6ENF1602	M 16KOHM, 1/10W	1
R614	ERJ6ENF3301	M 3.3KOHM, 1/10W	1
R615-17	ERJ6GEYJ103	M 10KOHM,J,1/10W	3
R618	ERJ6GEYJ104	M 100KOHM,J,1/10W	1
R619	ERJ8RQFR68	M 0.68OHM, J,1/8W	1
R620	ERJ6GEYJ103	M 10KOHM,J,1/10W	1
R621	ERJ8GEYJ123	M 12KOHM, J,1/8W	1
R622	ERJ8ENF1503	M 15KOHM, 1/8W	1
R623		M 10KOHM,J,1/10W	1
R624		M0.22 OHM, J, 2W	1
R625		M 100KOHM,J,1/10W	1
R626		M 15KOHM, 1/8W	1
R627		M 8.2KOHM,J,1/10W	1
R628		CONTROL 3KOHMB	1
R629		M 100KOHM,J,1/10W	1
R630		M 47KOHM,J,1/10W	1
R631		M 33KOHM, J,1/8W	1
R632		M 220 OHM,J,1/10W	1
R633	ERJ6GEYJ334	M 330KOHM,J,1/10W	1
R634	ERJ8RQFR68	M 0.68OHM, J,1/8W	1
R636		M 15KOHM, 1/8W	1
R637	ERJ8RQFR68	M 0.68OHM, J,1/8W	1
R640		M 10KOHM, J, 1/10W	1
R641	<b>†</b>	· ·	1
R642-44		M 47KOHM,J,1/10W M 0.68OHM, J,1/8W	3
R645	<del></del>		1
		M 47KOHM, J, 1/10W	
R646,47		M 22KOHM, J,1/10W	2
R648		M 15KOHM, 1/8W	1
R649		M 22KOHM, J, 1/10W	1
R650		M 10KOHM, J, 1/10W	1
R651		M 47KOHM,J,1/10W	1
R652		M 9.1KOHM, 1/10W	1
R653		M 10KOHM,J,1/10W	1
R654		M 100 OHM, J,1/8W	1
R655		M0.39 OHM, 1/8W	1
R656		M 47KOHM, 1/10W	1
R657	<del></del>	M 1KOHM,J,1/10W	1
R658		M 1MOHM,J,1/10W	1
R659	ERJ6ENF3002	M 30KOHM, 1/10W	1
R660	ERJ6ENF1202	M 12KOHM, 1/10W	1
R661	<del> </del>	CONTROL 5KOHMB	1
R662		M 130KOHM, 1/10W	1
R663	-	M 2.2 OHM,J,1/16W	1
R664		M 9.1KOHM, 1/10W	1
R665	EVMAASA00B23	CONTROL 2KOHMB	1
R666	ERJ6GEYJ102	M 1KOHM,J,1/10W	1
R667,68	ERJ8GEY0R00	M 0 OHM, 1/8W	2
R669	ERJ6ENF1303	M 130KOHM, 1/10W	1
R670	ERJ6GEYJ102	M 1KOHM,J,1/10W	1
R671	EVMAASA00B14	CONTROL 10KOHMB	1
R674	ERJ8GEYJ333	M 33KOHM, J,1/8W	1
R675	ERJ3GEYJ2R2	M 2.2 OHM,J,1/16W	1
R676	ERJ8GEYJ333	M 33KOHM, J,1/8W	1
R677	ERJ6GEYJ224	M 220KOHM,J,1/10W	1
R678		M 22KOHM,J,1/10W	1
R679,80	ERJ8RQJR39	M0.39 OHM, 1/8W	2
R681	ERJ6ENF1500	M 150 OHM, 1/10W	1
1	t	•	<del>i i</del>

ı	1		ı	
R682	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R683	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R684	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R685	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R686	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R687	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R688	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R689	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R690	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R691	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R692,93	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R694	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R695	ERJ6ENF1602	M 16KOHM, 1/10W	1	
R696	ERJ8GEYJ100	M 10 OHM, J,1/8W	1	
R697	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R698	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R702	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R703,04	ERG2SJ101	M 100 OHM, J, 2W	2	
R706	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R707	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R708	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R712	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R713	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R901	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R903-06	ERJ8ENF1203	M 12KOHM, 1/8W	4	
R907	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R908	ERJ6GEYJ335	M 3.3MOHM,J,1/10W	1	
R909-11	ERJ6GEYJ106	M 10MOHM,J,1/10W	3	
R912	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R913,14	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R915	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R916	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R917	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R918	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R920	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R921	ERJ6RBD3092	M30.9KOHM,F,1/10W	1	
R922	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R925	ERJ6GEYJ335	M 3.3MOHM,J,1/10W	1	
R926,27	ERG2DJW224E	M 220KOHM, J, 2W	2	
R928-31	ERJ8ENF1203	M 12KOHM, 1/8W	4	
R932	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
RL402	TSEH8011	RELAY	1	⚠
	<b> </b>	RELAY	1	<u>~</u> <u>A</u>
RL403	TSE10801			
S401,02	J0LT00000009	SWITCH	2	A
T401	G4D4A0000107	SWITCHING TRANSFORMER	1	
T402	G4D1A0000098	SWITCHING TRANSFORMER	1	⚠
T404	G4D4A0000109	SWITCHING TRANSFORMER	1	Δ
T407	ETQ11K5AZ	CHOKE TRANS	1	Δ
T410	G4D2A0000229	SWITCHING TRANSFORMER	1	Δ
		SWITCHING TRANSFORMER	1	
T601	G4D2A0000227		<u> </u>	
W2	ERDS2TJ391	C 390 OHM, J,1/4W	1	
X501	H2B400400021	CRYSTAL	1	
Z1,Z2	K4ZZ01000206	TERMINAL	2	
Z410	TMM7464-2	CLAMPER	1	
Z411	TMME190	CLAMPER	1	
Z412	TMM7443-3	CLAMPER	1	
Z413	TMM7464-2	CLAMPER	1	
I	I	1		ı

Z414	TMME190	CLAMPER	1	
Z420	TMM23417	CLAMPER	1	
Z450-53	EYF52BCY	FUSE HOLDER	4	
ZN401,02	D4EAD6210001	VARISTOR	2	Δ
ZN403	D4EA8511A001	VARISTOR	1	⚠
ZN404	D4EAB681A011	VARISTOR	1	⚠